

## Supernova - TECHNICAL CHARACTERISTICS

### Supernova plugs

#### Technical specifications

- unbreakable, polycarbonate body, black or white
- gasket, cord-grip and protected individual wire passages
- screw terminals
- plugs with live pins protected by semitransparent insulating sheaths
- permanently fixed earth contact
- when 00206 and 00207 plugs are inserted side-by-side, make sure that they could be easily extracted.

#### Wiring instructions

- 10 A rewirable plugs and portable socket outlets shall be connected with cable of cross sectional area not smaller than 0,75 mm<sup>2</sup>
- 16 A rewirable plugs and portable socket outlets shall be connected with cable of cross sectional area not smaller than 1 mm<sup>2</sup>

#### Conformity to Standards


CEI 23-50 (IEC 60884-1) Standard

### Plugs and socket outlets - matching possibilities

	P10	P11	P17	P17/11	universal	multivimar	VIMAR 20 A	P30	German standard	French standard	Swiss standard 12 type
00200 - 00200.B	●	●		●	●	●		●	●	●	●
00201 - 00201.B		●		●	●	●		●			
00202 - 00202.B			●	●	●	●	●				
00206 - 00206.B		●		●	●	●					
00207 - 00207.B			●	●	●	●	●				
00211 - 00211.B		●		●	●	●		●			
00212 - 00212.B			●	●	●	●	●				
01074 - 01074.B							●				

● Standard of plug matching the socket outlet.

### Dimensions (in mm)

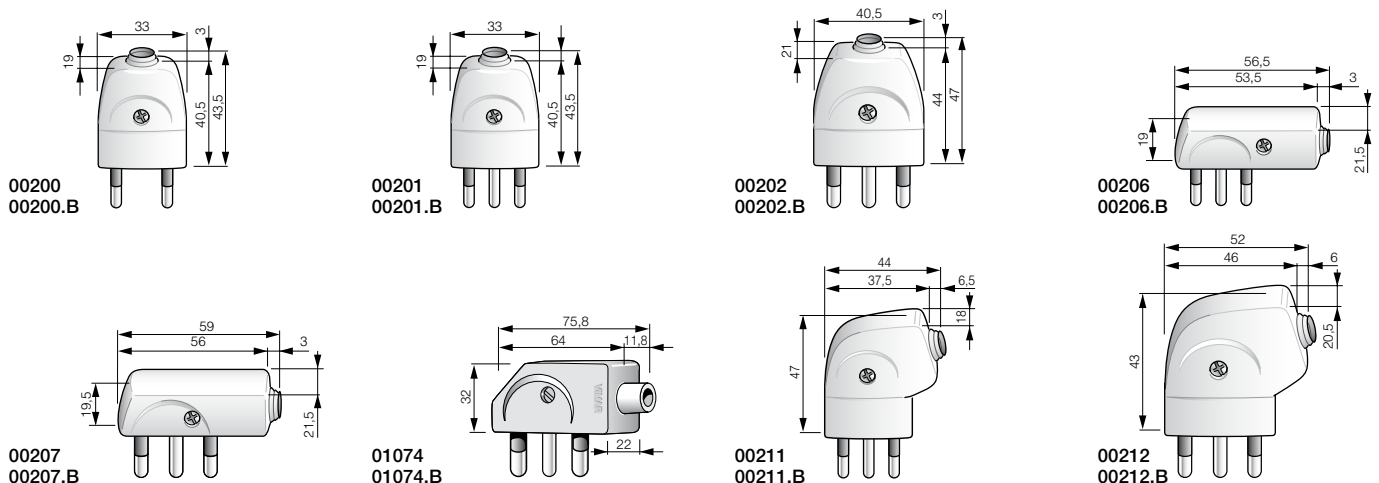

## Supernova

### Plugs 250 V~, axial cable entry

00200	.B	2P 10 A SICURY plug, Italian standard S10
00201	.B	2P+E 10 A SICURY plug, Italian standard S11
00202	.B	2P+E 16 A SICURY plug, Italian standard S17



00200  
black



00200.B  
white



00201  
black



00201.B  
white



00202  
black



00202.B  
white

### Flat plugs 250 V~, 90° cable entry

00206	.B	2P+E 10 A SICURY plug, Italian standard SPA11
00207	.B	2P+E 16 A SICURY plug, Italian standard SPA17
01074	.B	2P+E 20 A SICURY plug, ø 6 mm pin, 26 mm distance between centres, ø 5 mm central earth pin . For socket outlets 16205, 08150, 10150



00206  
black



00206.B  
white



00207  
black



00207.B  
white



01074  
black



01074.B  
white

### Plugs 250 V~ with standardized outline, 90° cable entry

00211	.B	2P+E 10 A SICURY plug, Italian standard S11
00212	.B	2P+E 16 A SICURY plug, Italian standard S17



00211  
black



00211.B  
white



00212  
black



00212.B  
white