

## Socket outlets - TECHNICAL CHARACTERISTICS

### Scope

Suitable for use in the service industry, like offices, clinics, doctors' consulting rooms, hospitals, and wherever there are lines dedicated to the supply of equipments which need to continue working even in the event of a power failure (lines protected by generating sets, lines supplied by no-break generating sets, etc.).


The socket outlets with locking device prevent from inserting a plug which is not fitted with the relevant mechanical releasing device, thus preventing from supplying an equipment which is not suitable for a given supply line.

### Technical specifications

The socket outlets with locking device are suitable for insertion of the following plugs:

- **00231 - 00231.B:** 2P+E 16 A 250 V~ German/French standard, axial cable entry
- **00232 - 00232.B:** 2P+E 16 A 250 V~ French standard, axial cable entry
- **00241 - 00241.B:** 2P+E 16 A 250 V~ German/French standard, 90° cable entry
- 2P 16 A German standard plug

### Example of use

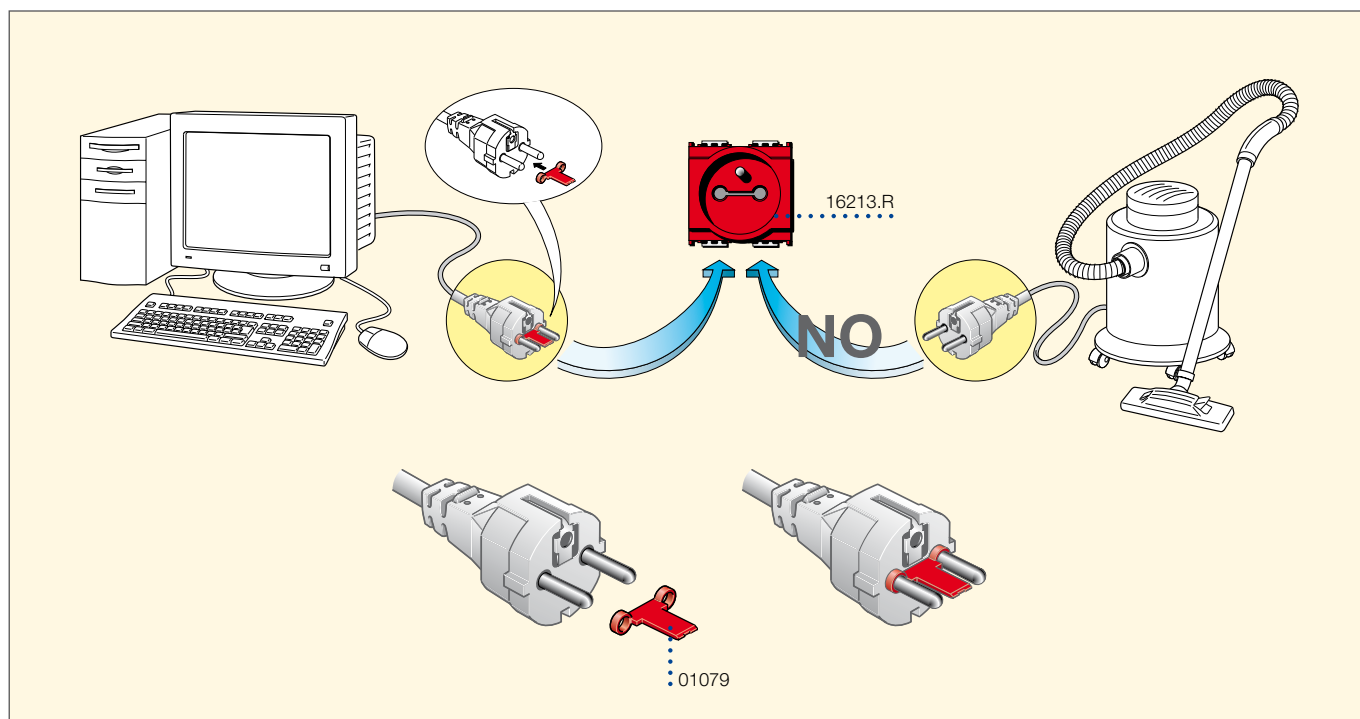

## Socket outlets

### Socket outlet 250 V~ with locking device

<b>16213</b>	<b>.B</b>	2P+E 16 A SICURY socket outlet, French standard, with locking device for the insertion of special purpose plugs - 2 modules Supplied with 01079 releasing device
--------------	-----------	---



**16213**  
grey



**16213.B**  
white



### Socket outlet 250 V~ with locking device

<b>16213.R</b>	As above, red - 2 modules
<b>01079</b>	Spare releasing device for socket outlets with locking device 16213 and 17043, red



**16213.R**



**01079**

## Socket outlets

### Italian standard socket outlet 250 V~

<b>17031</b>	<b>.B</b>	2P+E 10 A SICURY socket outlet, Italian standard P11
<b>17033</b>	<b>.B</b>	2P+E 16 A SICURY Bpresa socket outlet, Italian standard P17/11
<b>17039</b>	<b>.B</b>	2P+E 16 A SICURY socket outlet, Italian standard P30 (lateral and central earth contacts) - 2 reduced modules



**17033**  
grey



**17033.B**  
white



**17033**  
grey



**17033.B**  
white



**17039**  
grey



**17039.B**  
white

Technical specifications,  
page 150

### Socket outlet 250 V~ for dedicated supply lines

<b>Δ 17039.A</b>		2P+E 16 A SICURY socket outlet, Italian standard P30 (lateral and central earth contacts), orange - 2 reduced modules
<b>17039.R</b>		As above, red - 2 reduced modules
<b>Δ 17039.V</b>		As above, green - 2 reduced modules



**17039.A**



**17039.R**



**17039.V**

Technical specifications,  
page 152

### Socket outlet 250 V~ with locking device

<b>Δ 17043</b>	<b>.B</b>	2P+E 16 A socket outlet, French standard, with locking device for insertion of special purpose plugs, grey - 2 reduced modules
<b>Δ 17043.R</b>		As above, red - 2 reduced modules
<b>01079</b>		Spare releasing device for 16213 and 17043 socket outlets, red



**17043**  
grey



**17043.B**  
white



**17043.R**



**01079**

Technical specifications,  
page 154