

Multiple portable socket outlets 250 V~ - TECHNICAL CHARACTERISTICS

Multiple portable socket outlets with Bpresa outlets

Technical specifications

- unbreakable polycarbonate, black or ivory
- with cord-grip
- Bpresa SICURY outlets, Italian standard P17/11
- screw terminals
- live socket-contacts screened by captive shutters
- resilient live and earth socket-contacts, permanently fixed
- supplied:
 - without cable
 - with insulated PVC H05VV-F cable, cross sectional area 1 mm² and with 2P+E 16 A 250 V~ non-rewirable plug, Italian standard S17. Cabling in compliance with IMQ Requirement for blister packs.
- standard cable length: 2 m; by request the cable can be supplied 3 m, 5 m, 10 m long






Wiring instructions

- rewirable plugs and portable socket-outlets 16 A shall be connected with cable of cross sectional area not smaller than 1 mm²

Conformity to Standards

CEI 23-50 (IEC 60884-1) Standard

Dimensions (in mm)

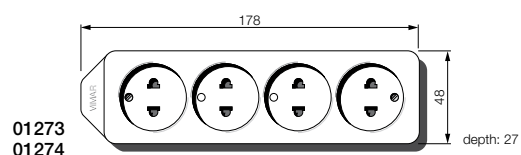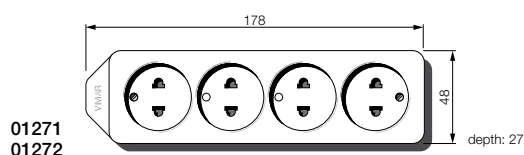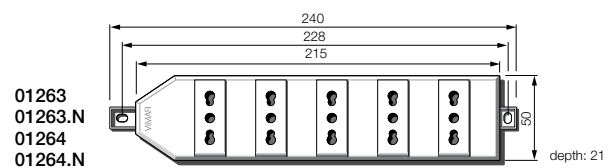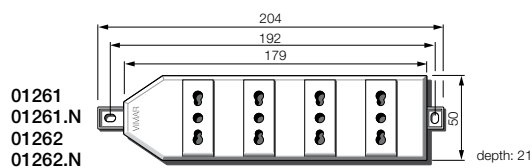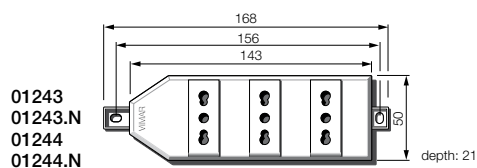

Multiple portable socket outlets 250 V~

Multiple portable socket outlet 250 V~ with Bpresa outlets

01243	2P+E 16 A multiple portable socket outlet, with wall fixing lugs • three Bpresa SICURY outlets, Italian standard P17/11, ivory
01243.N	As above, black
01244	2P+E 16 A multiple portable socket outlet, with wall fixing lugs • three Bpresa SICURY outlets, Italian standard P17/11 • 2 m 3G1 mm ² cable and 2P+E 16 A plug, Italian standard S17, ivory
01244.N	As above, black



01243



01244.N

Multiple portable socket outlet 250 V~ with Bpresa outlets

01261	2P+E 16 A multiple portable socket outlet, with wall fixing lugs • four Bpresa SICURY outlets, Italian standard P17/11, ivory
01261.N	As above, black
01262	2P+E 16 A multiple portable socket outlet, with wall fixing lugs • four Bpresa SICURY outlets, Italian standard P17/11 • 2 m 3G1 mm ² cable and 2P+E 16 A plug, Italian standard S17, ivory
01262.N	As above, black



01261.N



01262

Multiple portable socket outlet 250 V~ with Bpresa outlets

01263	2P+E 16 A multiple portable socket outlet, with wall fixing lugs • five Bpresa SICURY outlets, Italian standard P17/11, ivory
01263.N	As above, black
01264	2P+E 16 A multiple portable socket outlet, with wall fixing lugs • five Bpresa SICURY outlets, Italian standard P17/11 • 2 m 3G1 mm ² cable and 2P+E 16 A plug, Italian standard S17, ivory
01264.N	As above, black



01263



01264.N

Multiple portable socket outlet 250 V~ with Euro-American standard outlets

*01271	2P 15 A multiple portable socket outlet, ivory • 4 outlets for 2P 15 A 125 V~ American standard plugs with non-polarized flat blades and for 2P plugs with ø 4 mm and ø 4,8 mm pins, 19 mm distance between centres
*01272	As above, with 2 m 2x1 mm ² cable and 2P plug with ø 4 mm pins, 19 mm distance between centres
Δ*01273	2P 15 A multiple portable socket outlet, ivory • 4 SICURY outlets, for 2P 15 A 125 V~ American standard plugs with non-polarized flat blades and for 2P plugs with ø 4 mm and ø 4,8 mm pins, 19 mm distance between centres
Δ*01274	As above, with 2 m 2x1 mm ² cable and 2P plug with ø 4 mm pins, 19 mm distance between centres



01271



01274

* Only for Countries not members of the EU

Δ Available until stocks last