
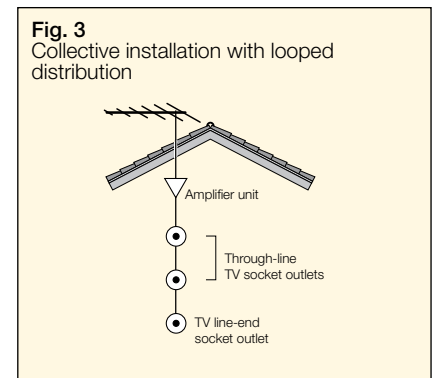
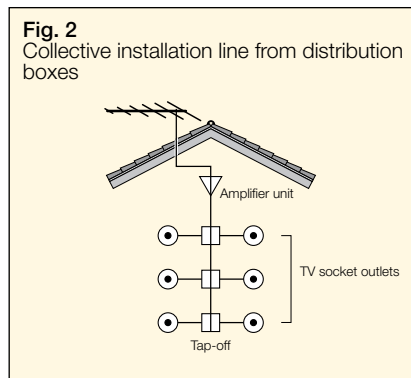


## TV socket outlets - TECHNICAL CHARACTERISTICS

### Coaxial TV 40-862 MHz socket outlets

#### Technical specifications

- patented cord-grip for easy and reliable connection of the coaxial cable
- captive screw terminals and toothed pressure plate, for the central conductor
- one capacitor series connected directly to the internal terminal, or through an adequate radiofrequency repeater, to protect the installation against dangerous voltages from connected receivers
- TV socket outlet without attenuation: to be used for single down-lines or for collective installation lines from distribution boxes or tap-offs (Fig. 1 and 2)
- through-line TV socket outlet and line-end socket outlet: resistive type with connection attenuation 20 dB for installations with several socket outlets connected in cascade (looped distribution - Fig. 3)

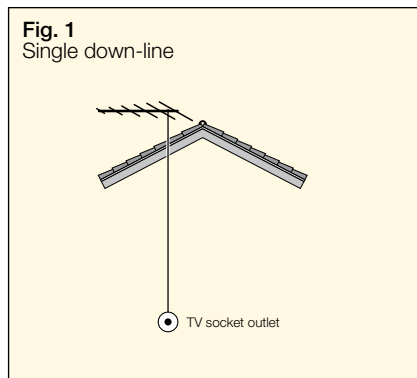

## TV socket outlets

### Coaxial TV 40-862 MHz socket outlet


*16320	.B	Coaxial TV socket outlet, single connection, with IEC 60169-2 female connector
*16320.S	.B	Coaxial TV socket outlet, single connection, with IEC 60169-2 female connector, 2 cord-grips
*16321	.B	Coaxial TV socket outlet, through-line, with IEC 60169-2 female connector, throughpass attenuation 3 dB, connection attenuation 20 dB
*16322	.B	Coaxial TV socket outlet, line-end, with IEC 60169-2 female connector, connection attenuation 20 dB



16320  
16320.S  
16321  
16322  
grey



16320.B  
16320.S.B  
16321.B  
16322.B  
white



### Coaxial F-type socket outlet


16331	.B	Coaxial socket outlet with F-type female connector (IEC 60169-24). For frequencies up to 2400 MHz. In/out connection with F-type male connector 01654.
-------	----	---



16331  
grey



16331.B  
white



### Terminal resistor

16330	Z 75 Ω terminal resistor for TV-RD-SAT socket outlets line end, for frequencies up to 2400 MHz
*08175	Z 75 Ω terminal resistor for TV socket outlets line end



16330



08175

## Switches

## Coaxial TV 40-862 MHz socket outlet

\*08178 Coaxial TV socket outlet, single connection, with IEC 60169-2 female connector

\*08178.S Coaxial TV socket outlet, single connection, with IEC 60169-2 female connector, 2 cord-grips


\*08179 Coaxial TV socket outlet, through-line, with IEC 60169-2 female connector, throughpass attenuation 3 dB, connection attenuation 20 dB

Δ\*08180 Coaxial TV socket outlet, line-end, with IEC 60169-2 female connector, connection attenuation 20 dB


Technical specifications: see page 180



08178  
08178.S



08179




## Coaxial F-type socket outlet

08186 Coaxial socket outlet with F-type female connector (IEC 60169-24).  
For frequencies up to 2400 MHz. In/out connection with F-type male connector 01654.

Technical specifications: see page 180



08186



## Terminal resistor

16330 Z 75 Ω terminal resistor for TV-RD-SAT socket outlets line end, for frequencies up to 2400 MHz

\*08175 Z 75 Ω terminal resistor for TV socket outlets line end



16330



08175