

Socket outlets - TECHNICAL CHARACTERISTICS

Scope

Supply of electrical household appliances, lighting fittings, etc.

Italian standard technical specifications

- supply voltage: 250 V~
- rated current: 10 A or 16 A
- socket outlet with increased protection and shuttered socket-contacts
- insulation resistance tested with 500 V d.c.: > 5 MΩ
- dielectric strength: 2000 V~
- breaking capacity: 50 operations (plug and withdrawn of the plug) to 1,25 In 275 V~ cosφ 0,6
- electrical life: > 5.000 operations (plug and withdrawn of the plug) with rated current and voltage to cosφ 0,6
- resilient wrap socket-contacts
- priority of connection on earthing socket-contacts

Conformity to Standards

CEI 23-50 (IEC 60884-1) Standard

Plugs and socket outlets - matching possibilities


● Plugs and socket outlets matching standards

Plug standards	VIMAR products								
		P11 16201 - 16201.B	P17 16202 - 16202.B	P17/11 16203 - 16203.B	16205 - 16205.B	P30 16209 - 16209.B	16210 - 16210.B	16211 - 16211.B	
 2P 10 A	MILLE S10	01020 - 01020.B	---	01020 - 01020.B	---	01020 - 01020.B	01020 - 01020.B	01020 - 01020.B	
	S10	01040 - 01040.B	---	01040 - 01040.B	---	---	---	---	
	S10	01045 - 01045.B	---	01045 - 01045.B	---	01045 - 01045.B	01045 - 01045.B	01045 - 01045.B	
	SUPERNOVA S10	00200 - 00200.B	---	00200 - 00200.B	---	00200 - 00200.B	00200 - 00200.B	00200 - 00200.B	
 2P 2.5 A	Europlug	●	---	●	---	●	●	●	
 2P+E 10 A	MILLE S11	01021 - 01021.B	---	01021 - 01021.B	---	01021 - 01021.B	01021 - 01021.B	01021 - 01021.B	
	SPA11	01041 - 01041.B	---	01041 - 01041.B	---	---	---	---	
	S11	01046 - 01046.B	---	01046 - 01046.B	---	01046 - 01046.B	01046 - 01046.B	01046 - 01046.B	
	SUPERNOVA S11	00201 - 00201.B	---	00201 - 00201.B	---	00201 - 00201.B	00201 - 00201.B	00201 - 00201.B	
	SPA11	00206 - 00206.B	---	00206 - 00206.B	---	---	---	---	
	S11	00211 - 00211.B	---	00211 - 00211.B	---	00211 - 00211.B	00211 - 00211.B	00211 - 00211.B	
 2P 16 A	S16	---	●	●	●	---	●	●	
 2P+E 16 A	MILLE S17	---	01026 - 01026.B	01026 - 01026.B	01026 - 01026.B	---	01026 - 01026.B	01026 - 01026.B	
	SPA17	---	01043 - 01043.B	01043 - 01043.B	01043 - 01043.B	---	---	---	
	S17	---	01048 - 01048.B	01048 - 01048.B	01048 - 01048.B	---	01048 - 01048.B	01048 - 01048.B	
	SUPERNOVA S17	---	00202 - 00202.B	00202 - 00202.B	00202 - 00202.B	---	00202 - 00202.B	00202 - 00202.B	
	SPA17	---	00207 - 00207.B	00207 - 00207.B	00207 - 00207.B	---	---	---	
	S17	---	00212 - 00212.B	00212 - 00212.B	00212 - 00212.B	---	00212 - 00212.B	00212 - 00212.B	
 2P+E 20 A	SUPERNOVA	---	---	---	01074 - 01074.B	---	---	---	
 2P+E 16 A	German standard					00230 - 00230.B	00230 - 00230.B	00230 - 00230.B	
	German + French standard					00231 - 00231.B	00231 - 00231.B	00231 - 00231.B	
	German + French standard					00241 - 00241.B	00241 - 00241.B	00241 - 00241.B	

Socket outlets


Italian standard socket outlet 250 V~

16201	.B	2P+E 10 A SICURY socket outlet, Italian standard P11
16202	.B	2P+E 16 A SICURY socket outlet, Italian standard P17
16203	.B	2P+E 16 A SICURY Bpresa socket outlet, Italian standard P17/11
16205	.B	2P+E 16 A SICURY socket outlet, for 01074 2P+E 20 A and 2P+E 16 A Italian standard plugs

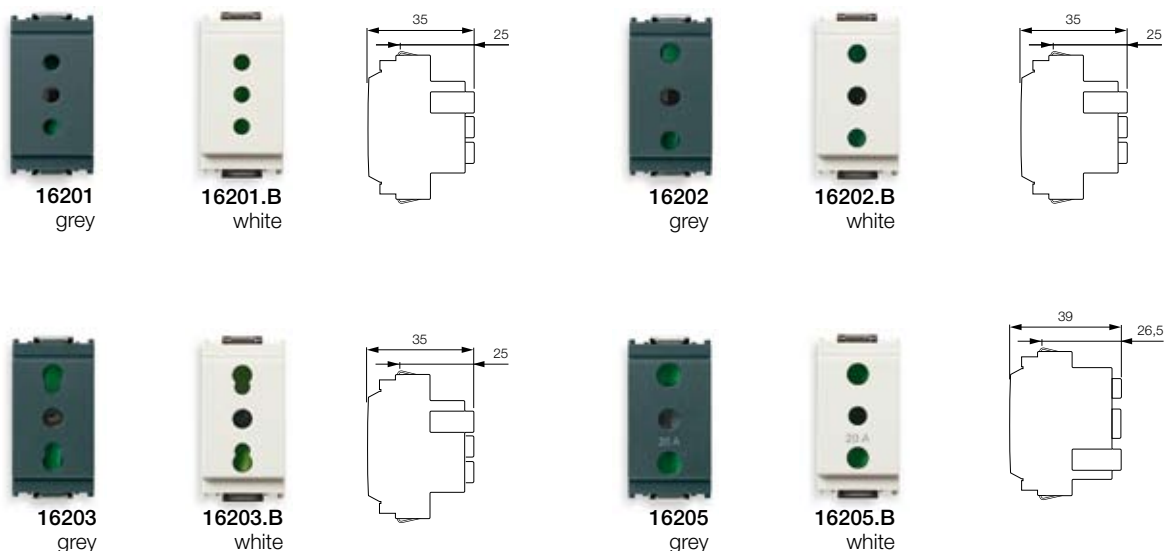

Italian standard socket outlet 250 V~

16209	.B	2P+E 16 A SICURY socket outlet, Italian standard P30 (lateral and central earth contacts) - 2 modules
16210	.B	2P+E 16 A SICURY socket outlet, universal, for 2P 2,5 A Europlugs, 2P and 2P+E 10 A and 16 A Italian standard plugs, 2P+E 16 A 250 V~ German standard plugs, 2P 15 A 125 V~ American standard plugs with non-polarized flat blades - 2 modules. No earth connection is realized with French standard plug
16211	.B	2P+E 16 A SICURY socket outlet, universal, for 2P 2,5 A Europlugs, 2P and 2P+E 10 A and 16 A Italian standard plugs, 2P+E 16 A 250 V~ German standard plugs - 2 modules. No earth connection is realized with French standard plug

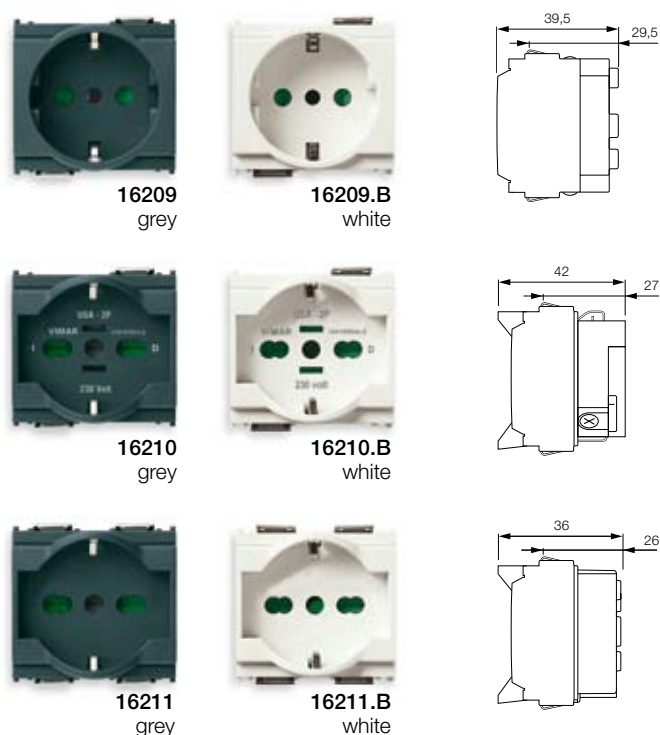

Socket outlets

Italian standard socket outlet 250 V~

17031	.B	2P+E 10 A SICURY socket outlet, Italian standard P11
17033	.B	2P+E 16 A SICURY Bpresa socket outlet, Italian standard P17/11
17039	.B	2P+E 16 A SICURY socket outlet, Italian standard P30 (lateral and central earth contacts) - 2 reduced modules



17033
grey



17033.B
white



17033
grey



17033.B
white



17039
grey



17039.B
white

Technical specifications,
page 150

Socket outlet 250 V~ for dedicated supply lines

Δ 17039.A		2P+E 16 A SICURY socket outlet, Italian standard P30 (lateral and central earth contacts), orange - 2 reduced modules
17039.R		As above, red - 2 reduced modules
Δ 17039.V		As above, green - 2 reduced modules



17039.A



17039.R



17039.V

Technical specifications,
page 152

Socket outlet 250 V~ with locking device

Δ 17043	.B	2P+E 16 A socket outlet, French standard, with locking device for insertion of special purpose plugs, grey - 2 reduced modules
Δ 17043.R		As above, red - 2 reduced modules
01079		Spare releasing device for 16213 and 17043 socket outlets, red



17043
grey



17043.B
white



17043.R



01079

Technical specifications,
page 154