


Socket outlets - TECHNICAL CHARACTERISTICS

Other standard plugs and socket outlets

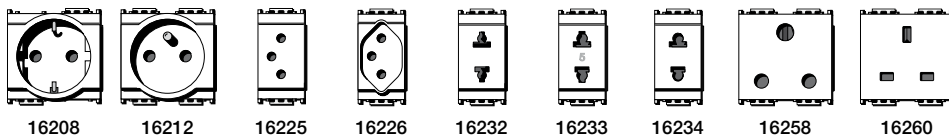

S10 Italian standard plug	●	●	●		●	●	●		
2P 2,5 A Europlug	●	●	●	●	●	●	●		
2P+E 16 A 250 V~ German standard plug	●						●	●	
2P+E 16 A 250 V~ German/French standard plug	●	●					●	●	
2P+E 16 A 250 V~ French standard plug		●					●	●	
2P+E 10 A 250 V~ Swiss standard plug			●	●					
2P 15 A 125 V~ American standard plug					●	●	●		
2P 15 A 250 V~ American standard plug					●	●			
2P+E 16 A 250 V~ English standard plug								●	
2P+E 13 A 250 V~ English standard plug									●

● Standard plug matching the socket outlet

● Standard plug matching the socket outlet without continuity of the earthing connection

Conformity to Standards

- German standard socket outlet: DIN VDE 0620-1 Standard
- French standard socket outlet: NF C 61-314 Standard
- Swiss standard socket outlet: SEV 1011 Standard


VIMAR plugs - other standards

- **00230**: 2P+E 16 A 250 V~ German standard
- **00231**: 2P+E 16 A 250 V~ German/French standard
- **00232**: 2P+E 16 A 250 V~ French standard
- **00241**: 2P+E 16 A 250 V~ German/French standard

Socket outlets


Other standard socket outlet

16208	.B	2P+E 16 A 250 V~ SICURY socket outlet, German standard - 2 modules
16212	.B	2P+E 16 A 250 V~ SICURY socket outlet, French standard - 2 modules
16258	.B	2P+E 16 A 250 V~ SICURY socket outlet, English standard - 2 modules
16260	.B	2P+E 13 A 250 V~ SICURY socket outlet, English standard - 2 modules

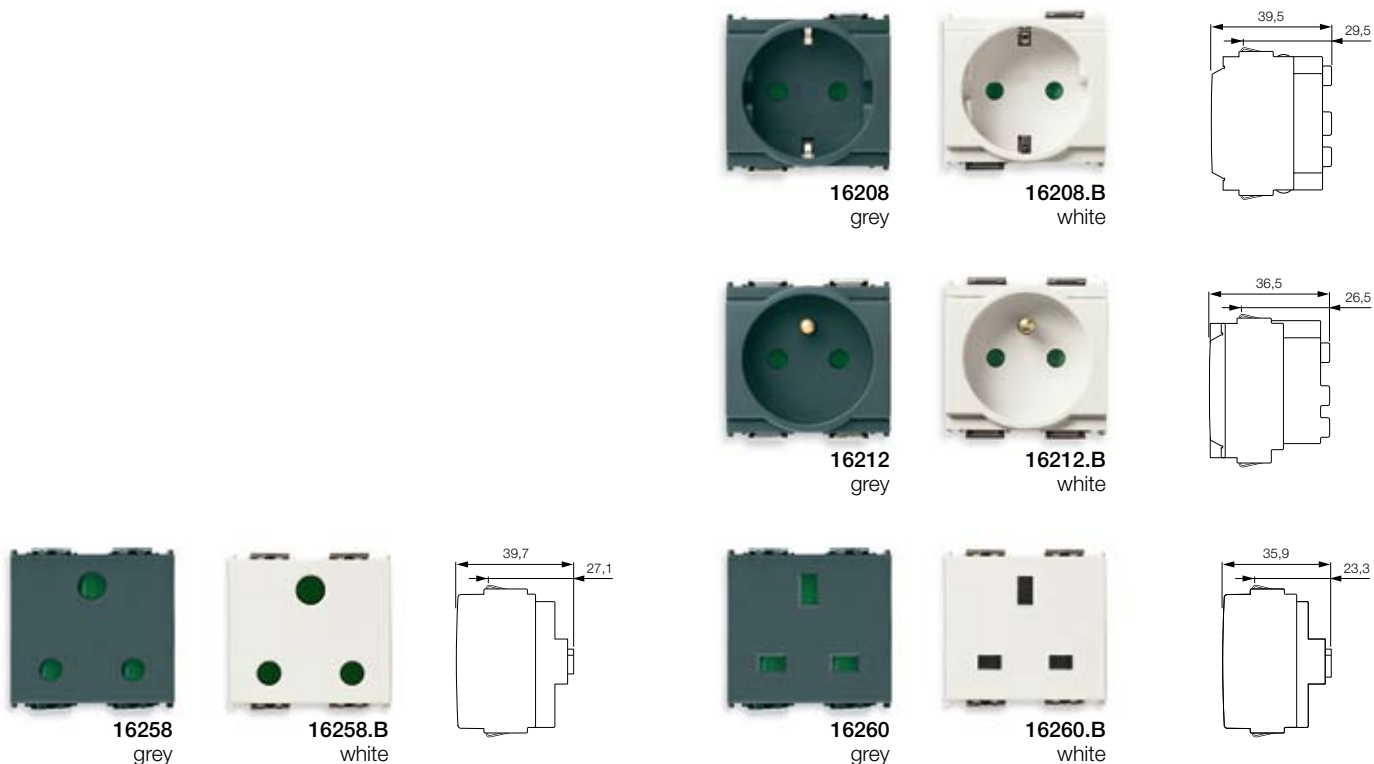

Other standard socket outlet

*16225	.B	2P+E 10 A 250 V~ socket outlet, Swiss standard, 12 type
*16226	.B	2P+E 10 A 250 V~ socket outlet, Swiss standard, 13 type
*16232	.B	2P 15 A 250 V~ socket outlet, polarised Euro-American standard (for plugs with parallel and in-line flat pins and \varnothing 4 mm pins)
*16233	.B	2P 15 A 250 V~ socket outlet, polarised Euro-American standard (for plugs with parallel and in-line flat pins and \varnothing 4,8 mm pins)
*16234	.B	2P 10 A 250 V~ SICURY socket outlet, Euro-American standard (for plugs with parallel flat pins and \varnothing 4,8 mm pins)

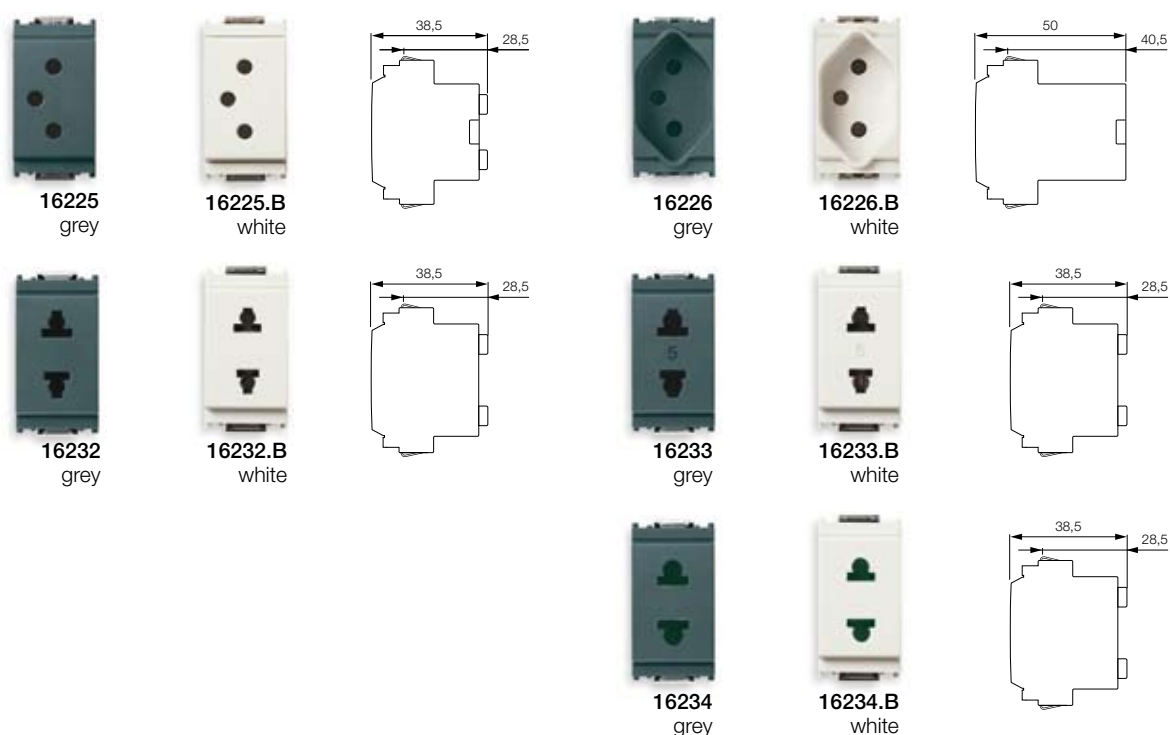

Socket outlets

Other standard socket outlet

17038	.B	2P+E 16 A 250 V~ SICURY socket outlet, German standard - 2 reduced modules
17042	.B	2P+E 16 A 250 V~ SICURY socket outlet, French standard - 2 reduced modules
*17044	.B	2P 15 A 250 V~ socket outlet, polarized Euro-American standard (for plugs with parallel and in-line pins and ø 4,8 mm pins)



17038
grey



17038.B
white



17042
grey



17042.B
white



17044
grey



17044.B
white

Technical specifications,
page 160

Coaxial TV-RD-SAT 5-2400 MHz socket outlet

17066.01	.B	Coaxial TV-RD-SAT 5-2400 MHz socket outlet, single-connection, with IEC 60169-2 male connector, connection attenuation 1 dB. Allows the passage of d.c. current and control signals (24 V 500 mA max).
17066.10	.B	Coaxial TV-RD-SAT 5-2400 MHz socket outlet, through-line, with IEC 60169-2 male connector, connection attenuation 10 dB
17066.15	.B	As above, connection attenuation 15 dB
17066.20	.B	As above, connection attenuation 20 dB
17070.05	.B	Coaxial TV-RD-SAT 5-2400 MHz socket outlet, single-connection, 2 outputs with IEC 60169-2 male and female connectors, connection attenuation 5 dB - 2 reduced modules. Allows the passage of d.c. current and control signals (24 V 500 mA max) through the female connector
17070.10	.B	Coaxial TV-RD-SAT 5-2400 MHz socket outlet, through-line, 2 outputs with IEC 60169-2 male and female connectors, connection attenuation 10 dB - 2 reduced modules
17070.15	.B	As above, connection attenuation 15 dB
17070.20	.B	As above, connection attenuation 20 dB



17066...
grey



17066...B
white



17070...
grey



17070...B
white

Technical specifications,
pages 176-178

Coaxial TV 40-862 MHz socket outlet

Δ*17050	.B	Coaxial TV socket outlet, single connection, with IEC 60169-2 female connector
Δ*17050.S	.B	Coaxial TV socket outlet, single connection, with IEC 60169-2 female connector, 2 cord-grips
Δ*17051	.B	Coaxial TV socket outlet, through-line, with IEC 60169-2 female connector, throughpass attenuation 3 dB, connection attenuation 20 dB
Δ*17052	.B	Coaxial TV socket outlet, line-end, with IEC 60169-2 female connector, connection attenuation 20 dB



17050
17050.S
17051
17052
grey



17050.B
17050.S.B
17051.B
17052.B
white

Technical specifications,
page 180