


Acoustic and optical signalling - TECHNICAL CHARACTERISTICS

Luminous indicator units Signalling unit

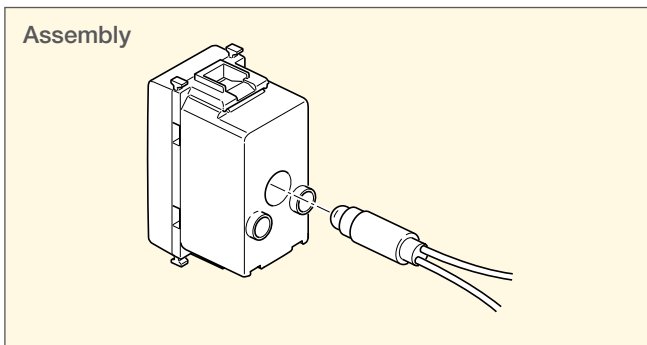

Technical specifications


- terminals for the connection of the signalling unit cables to the supply conductors

Conformity to Standards

LV Directive
EN 62094-1 Standard

A 1,5 μ F 400 V~ capacitor should be connected in parallel to neon or fluorescent signalling units to avoid self-ignition in special circuits

Double indicator units Signalling unit

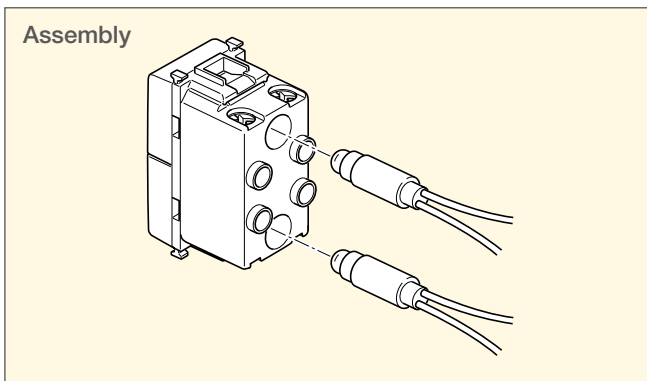

Technical specifications

- terminals for the connection of the signalling unit cables to the supply conductors

Conformity to Standards

LV Directive
EN 62094-1 Standard

A 1,5 μ F 400 V~ capacitor should be connected in parallel to neon or signalling units to avoid self-ignition in special circuits

Colour of emitted light	Range of signalling units					Diffuser colour
	Article	Type	Voltage	W	Colour	
white	10490	incandescence	12 V	0,5 W max	white	white
white	10491	incandescence	24 V	0,5 W max	white	white
orange	10490	incandescence	12 V	0,5 W max	white	orange
orange	10491	incandescence	24 V	0,5 W max	white	orange
red	10492	neon	110 V~	0,5 W max	red	red
red	10493	neon	250 V~	0,5 W max	red	red
green	Δ 10492.V	fluorescent	110 V~	0,5 W max	green	green
green	10493.V	fluorescent	250 V~	0,5 W max	green	green
blue	Δ 10492.AZ	fluorescent	110 V~	0,5 W max	blue	white
blue	10493.AZ	fluorescent	250 V~	0,5 W max	blue	white

Note Colour of emitted light = colour of microtube lamp + diffuser colour

Acoustic and optical signalling

Luminous indicator unit

20386.A	.B	.N	Indicator unit for signalling unit, orange diffuser. Supplied without signalling unit
20386.B	.B	.N	As above, white diffuser
20386.R	.B	.N	As above, red diffuser
20386.V	.B	.N	As above, green diffuser



20386.A
grey



20386.A.B
white



20386.A.N
Next




20386.B
grey



20386.B.B
white



20386.B.N
Next



20386.R
grey



20386.R.B
white



20386.R.N
Next




20386.V
grey



20386.V.B
white



20386.V.N
Next



Double indicator unit

20388.AB	.B	.N	Double indicator unit for 2 signalling units, orange and white diffusers. Supplied without signalling units
20388.AR	.B	.N	As above, orange and red diffusers
20388.AV	.B	.N	As above, orange and green diffusers
20388.BR	.B	.N	As above, white and red diffusers
20388.BV	.B	.N	As above, white and green diffusers
20388.RV	.B	.N	As above, red and green diffusers



20388.AB
grey



20388.AB.B
white



20388.AB.N
Next




20388.AR
grey



20388.AR.B
white



20388.AR.N
Next



20388.AV
grey



20388.AV.B
white



20388.AV.N
Next




20388.BR
grey



20388.BR.B
white



20388.BR.N
Next



20388.BV
grey



20388.BV.B
white



20388.BV.N
Next



20388.RV
grey



20388.RV.B
white



20388.RV.N
Next

