

Customer _____
 Address _____

Tel _____
 Mobile _____
 Email _____


Order _____
 Project Name _____
 Project Location _____
 Quote _____
 Date _____

Are any of the blinds on this order to be installed where children under 42 months old are likely to be allowed?

Yes No

1	2	3	4	5	6	7	8	9	10	12	13			14	15	16
											Free Hanging	Guide wires Select Hold Down Type	Side Tracks			
ID	Location	Blind Or Recess ¹	Width (X)	Drop (Y)	Install-Height ²	Fabric code ³	Control ⁴	Control position (Motor Wire Exit point)	Brackets	Bottom rail colour	Restraint Options			Fire Retardant	Switches Transformers or Ctls required	Qty
1		Blind Recess					Manual Powered Motor code Connector reqd Yes (QS Motor only) No	Left Right Cord Tidy (manual only) Chrome - Black White Nickel - Black White	Fix Top Face Covers Yes No	White Beige	Type: Dome* Flush Mounted Finish: Chrome Black Nickel *Chrome only	Type: ST3 ST5 ST6 Colour: White Biege Custom Colour	Yes No If "Yes" sales will contact you	Yes ⁶ No		
2		Blind Recess					Manual Powered Motor code Connector reqd Yes (QS Motor only) No	Left Right Cord Tidy (manual only) Chrome - Black White Nickel - Black White	Fix Top Face Covers Yes No	White Beige	Type: Dome* Flush Mounted Finish: Chrome Black Nickel *Chrome only	Type: ST3 ST5 ST6 Colour: White Biege Custom Colour	Yes No If "Yes" sales will contact you	Yes ⁶ No		
3		Blind Recess					Manual Powered Motor code Connector reqd Yes (QS Motor only) No	Left Right Cord Tidy (manual only) Chrome - Black White Nickel - Black White	Fix Top Face Covers Yes No	White Beige	Type: Dome* Flush Mounted Finish: Chrome Black Nickel *Chrome only	Type: ST3 ST5 ST6 Colour: White Biege Custom Colour	Yes No If "Yes" sales will contact you	Yes ⁶ No		

- "Blind dimension" is total width (bracket to bracket) "Recess dimension" = "blind dimension" plus 4mm fitting clearance.
- Installation height required for chain operated blinds. EN13120 Standards demand the distance from the floor to the bottom of the chain shall be at least 1500mm [59 1/16"].
- Please see online fabric collection for codes - For fire retardant treatment please contact Oceanair.
- Manual uses chrome chain and is supplied with a Chain Tidy
- Currently only available on powered blinds with QS 64 and Sonesse 30 motors. For "Side Track" option please see diagram on page 2
- Please fill in a [Powered Accessories Custom Order Form](#).

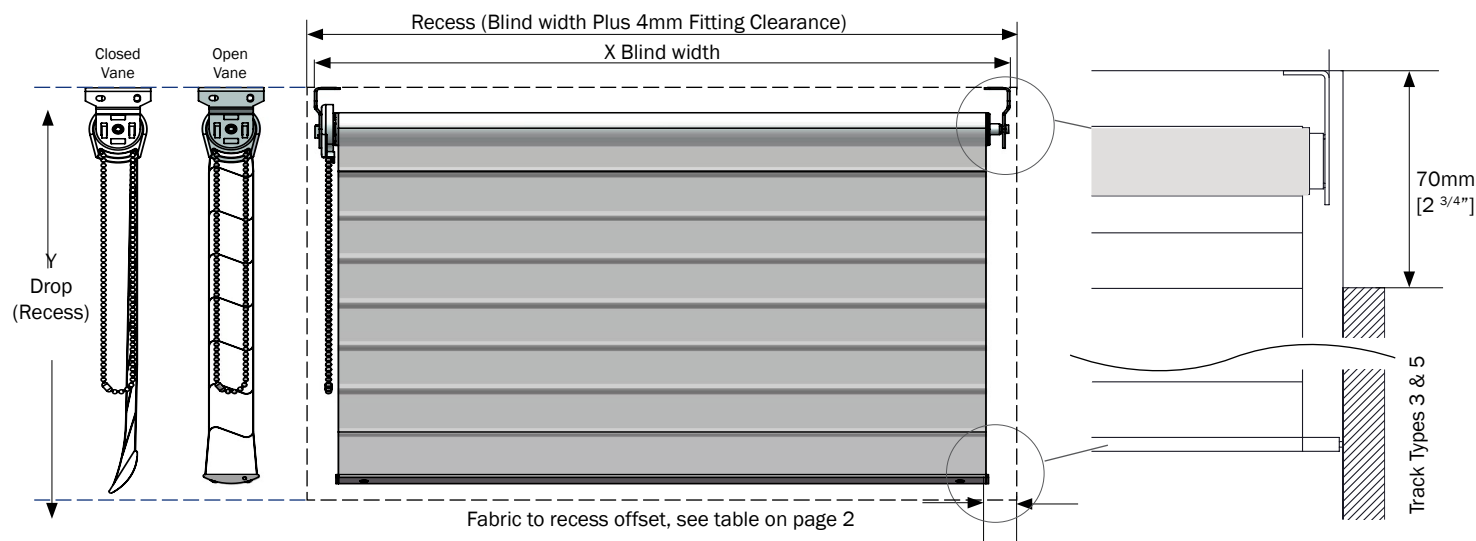

Code	Control Description	Switched (SW) or remote controlled (R)	Torque Nm	Rpm	Voltage	Min X	Max X	Min Y	Max Y	Fabric to Recess offset Guide
Manual	Chain drive	-	N/A	N/A	N/A	400 mm [15 3/4"]	2000mm [78 3/4"]	300mm [11 13/16"]	2000mm [78 3/4"]	19mm [3/4"]
RO28	Somfy Roll UP 28 RTS	R	1.1	28	12vDC Regulated	400 mm [15 3/4"]	2000mm [78 3/4"]	300mm [11 13/16"]	2000mm [78 3/4"]	TBC
28WT	Somfy Roll Up 28WT*	SW	0.8	30	24vDC Regulated	400 mm [15 3/4"]	2000mm [78 3/4"]	300mm [11 13/16"]	2000mm [78 3/4"]	TBC
S30D	Somfy Sonesse 30 DC	SW	2	28	24vDC Regulated	430mm [16 15/16"]	3000mm [118 1/8"]	300mm [11 13/16"]	2500mm [98 7/16"]	23mm [7/8"]
S30R	Somfy Sonesse 30 RTS	R	2	28	24vDC Regulated	430mm [16 15/16"]	3000mm [118 1/8"]	300mm [11 13/16"]	2500mm [98 7/16"]	23mm [7/8"]
S40W	Somfy Sonesse 40 WT 240v *	SW	9	12	240vAC	580mm [22 13/16"]	3000mm [118 1/8"]	300mm [11 13/16"]	2500mm [98 7/16"]	29mm [1 1/8"]
S40R	Somfy Sonesse 40 RTS 240v	R	9	12	240vAC	610mm [24"]	3000mm [118 1/8"]	300mm [11 13/16"]	2500mm [98 7/16"]	29mm [1 1/8"]
LS64	Lutron QS 64 **	**	1.1	43	25v DC	550mm [21 5/8"]	3000mm [118 1/8"]	300mm [11 13/16"]	2500mm [98 7/16"]	23mm [7/8"]

- Advisor maximum surface area = 4.5² Meters square
- As roller is visible when blind is deployed, it is suggested to use a valance.
- See table and tech sheet for gap size between fabric and recess.
- Mounting brackets are white.
- Bottom rail end caps are colour matched
- * The Sonesse 40 WT and Somfy Roll Up 28WT do not have a secondary tilt function, closure of the vanes can only be achieved manually.
- ** Specialist motors please contact Oceanair for more details.




Guide wire with Chrome Dome Hold Down



Guide Wire with **NEW** Flush Mounted Chrome Hold Down



New Oceanair Cord Tidy



Lutron™ QS Motor Connector

Side Track options

