

ELECTRICAL PROPERTIES



POWER 2W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

NEWPORT A85

3414/K2W-A85



MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE ADJUSTABLE
DOWNLIGHT FOR
EXTERIOR/INTERIOR

FRAME AISI 316L

HEATSINK SPECIAL COMPOUND


SCREEN OPAL

MOUNTING SYSTEM SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	240 lm		
LIGHTNESS 1mt	111 lx		
LIGHTNESS 2mt	28 lx		
LIGHTNESS 3mt	12 lx		

FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

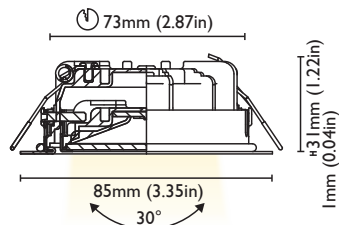

CUT OUT 73mm (2.87in)

FRAME 85 mm (3.35in)

DEPTH 31mm (1.22in)

REFLECTOR ADJUSTABILITY 15° x 2

ELECTRICAL PROPERTIES



POWER 4W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

NEWPORT A95

3414/K4W-A95



MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE ADJUSTABLE
DOWNLIGHT FOR
EXTERIOR/INTERIOR


FRAME AISI 316L

HEATSINK SPECIAL COMPOUND

SCREEN OPAL


MOUNTING SYSTEM SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	460 lm		
LIGHTNESS 1mt	212 lx		
LIGHTNESS 2mt	53 lx		
LIGHTNESS 3mt	24 lx		



FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

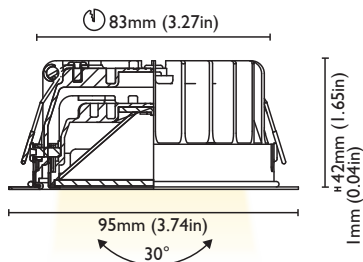

CUT OUT 83mm (3.27in)

FRAME 95 mm (3.74in)

DEPTH 42mm (1.65in)

REFLECTOR ADJUSTABILITY 15° x 2