

## ELECTRICAL PROPERTIES



POWER	1,5W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, RED

*bcm*  
BENEDETTI LIGHTING

MIAMI A55

3405/K1.5W-A55



## MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	125 lm		
LIGHTNESS 1mt	58 lx		
LIGHTNESS 2mt	14 lx		
LIGHTNESS 3mt	6 lx		

### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

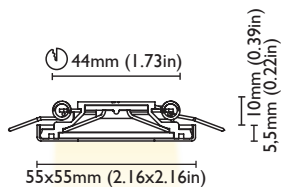

CUT OUT	44 mm (1.73in)
FRAME	55x55 mm (2.16x2.16in)
DEPTH	10 mm (0.39in)
REFLECTOR ADJUSTABILITY	NO

## ELECTRICAL PROPERTIES



POWER	2W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED

*bcm*  
BENEDETTI LIGHTING

MIAMI A70

3405/K2W-A70




## MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	215 lm		
LIGHTNESS 1mt	99 lx		
LIGHTNESS 2mt	25 lx		
LIGHTNESS 3mt	11 lx		



### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

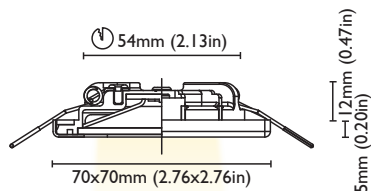

CUT OUT	54 mm (2.13in)
FRAME	70x70 mm (2.76x2.76in)
DEPTH	12 mm (0.47in)
REFLECTOR ADJUSTABILITY	NO

## ELECTRICAL PROPERTIES



POWER 4W

SUPPLY COSTANT VOLTAGE 8-32 VDC  
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE  
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

*bcm*  
BENEDETTI LIGHTING

MIAMI A80

3405/K4W-A80



## MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE FIXED DOWNLIGHT FOR  
EXTERIOR/INTERIOR

FRAME AISI 316L

HEATSINK SPECIAL COMPOUND


SCREEN OPAL

MOUNTING SYSTEM SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	415 lm		
LIGHTNESS 1mt	191 lx		
LIGHTNESS 2mt	48 lx		
LIGHTNESS 3mt	21 lx		

### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

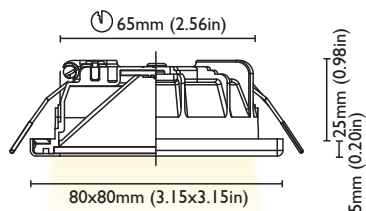

CUT OUT 65 mm (2.56in)

FRAME 80x80 mm (3.15x3.15in)

DEPTH 25 mm (0.98in)

REFLECTOR ADJUSTABILITY NO

## ELECTRICAL PROPERTIES



POWER 6W

SUPPLY COSTANT VOLTAGE 8-32 VDC  
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE  
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

*bcm*  
BENEDETTI LIGHTING

MIAMI A90

3405/K6W-A90



## MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE FIXED DOWNLIGHT FOR  
EXTERIOR/INTERIOR

FRAME AISI 316L

HEATSINK SPECIAL COMPOUND

SCREEN OPAL


MOUNTING SYSTEM SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	550 lm		
LIGHTNESS 1mt	254 lx		
LIGHTNESS 2mt	63 lx		
LIGHTNESS 3mt	28 lx		



### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

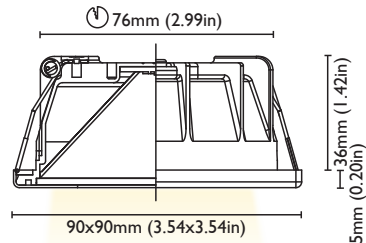

CUT OUT 76 mm (2.99in)

FRAME 90x90 mm (3.54x3.54in)

DEPTH 36 mm (1.42in)

REFLECTOR ADJUSTABILITY NO