

ELECTRICAL PROPERTIES



| | |
|--------------|---|
| POWER | 2W |
| SUPPLY | COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD) |
| PROTECTION | FUSE - POLARITY REVERSE SPIKE FILTER |
| DIMMABLE | YES |
| LIGHT SOURCE | OSRAM POWER LED |
| LED COLOUR | 3000K, 3000K+RED |

bcm
BENEDETTI LIGHTING

DAYTONA A80

3409/K2W-A80



MECHANICAL PROPERTIES




| | |
|-----------------|--|
| IP RATE | IP66 |
| FIXTURE | ADJUSTABLE DOWNLIGHT FOR EXTERIOR/INTERIOR |
| FRAME | AISI 316L |
| HEATSINK | SPECIAL COMPOUND |
| SCREEN | OPAL |
| MOUNTING SYSTEM | SPRINGS |

| | | | |
|---------------|--------|------|-----|
| COLOUR | 3000K | BEAM | 90° |
| CRI | >80 | | |
| LUMEN OUTPUT | 240 lm | | |
| LIGHTNESS 1mt | 111 lx | | |
| LIGHTNESS 2mt | 28 lx | | |
| LIGHTNESS 3mt | 12 lx | | |

FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

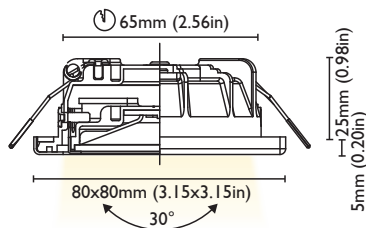

| | |
|-------------------------|------------------------|
| CUT OUT | 65 mm (2.56in) |
| FRAME | 80x80 mm (3.15x3.15in) |
| DEPTH | 25 mm (0.98in) |
| REFLECTOR ADJUSTABILITY | 15° x 2 |

ELECTRICAL PROPERTIES



POWER 4W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

DAYTONA A90

3409/K4W-A90



MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE ADJUSTABLE
DOWNLIGHT FOR
EXTERIOR/INTERIOR

FRAME AISI 316L

HEATSINK SPECIAL COMPOUND


SCREEN OPAL

MOUNTING SYSTEM SPRINGS

| | | | |
|---------------|--------|------|-----|
| COLOUR | 3000K | BEAM | 90° |
| CRI | >80 | | |
| LUMEN OUTPUT | 460 lm | | |
| LIGHTNESS 1mt | 212 lx | | |
| LIGHTNESS 2mt | 53 lx | | |
| LIGHTNESS 3mt | 24 lx | | |

FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

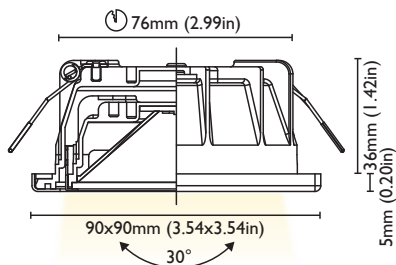

CUT OUT 76 mm (2.99in)

FRAME 90x90 mm (3.54x3.54in)

DEPTH 36 mm (1.42in)

REFLECTOR ADJUSTABILITY 15° x 2