

## ELECTRICAL PROPERTIES



POWER	1,5W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, RED

*bcm*  
BENEDETTI LIGHTING

VENICE A55

3411/K1.5W-A55



## MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	125 lm		
LIGHTNESS 1mt	58 lx		
LIGHTNESS 2mt	14 lx		
LIGHTNESS 3mt	6 lx		

### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

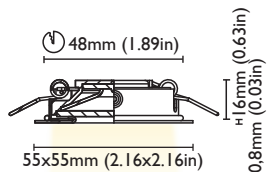

CUT OUT	48mm (1.89in)
FRAME	55x55 mm (2.16x2.16in)
DEPTH	16mm (0.63in)
REFLECTOR ADJUSTABILITY	NO

## ELECTRICAL PROPERTIES



POWER	2W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED

*bcm*  
BENEDETTI LIGHTING

VENICE A70

3411/K2W-A70



## MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	215 lm		
LIGHTNESS 1mt	99 lx		
LIGHTNESS 2mt	25 lx		
LIGHTNESS 3mt	11 lx		

### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

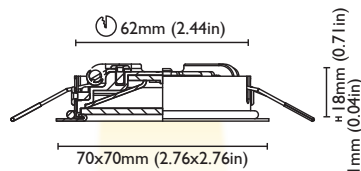

CUT OUT	62mm (2.44in)
FRAME	70x70 mm (2.76x2.76in)
DEPTH	18mm (0.71in)
REFLECTOR ADJUSTABILITY	NO

## ELECTRICAL PROPERTIES



POWER	4W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED

*bcm*  
BENEDETTI LIGHTING

VENICE A80

3411/K4W-A80



## MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	415 lm		
LIGHTNESS 1mt	191 lx		
LIGHTNESS 2mt	48 lx		
LIGHTNESS 3mt	21 lx		



### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

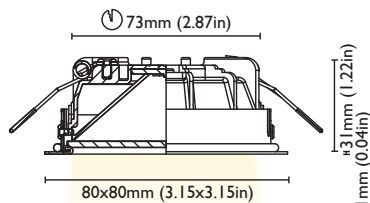

CUT OUT	73mm (2.87in)
FRAME	80x80 mm (3.15x3.15in)
DEPTH	31mm (1.22in)
REFLECTOR ADJUSTABILITY	NO

## ELECTRICAL PROPERTIES



POWER	6W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED

*bcm*  
BENEDETTI LIGHTING

VENICE A90

3411/K6W-A90



## MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	550 lm		
LIGHTNESS 1mt	254 lx		
LIGHTNESS 2mt	63 lx		
LIGHTNESS 3mt	28 lx		



### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

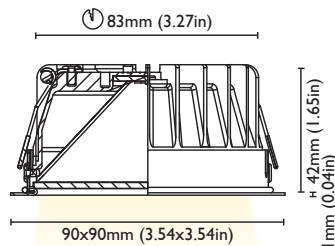

CUT OUT	83mm (3.27in)
FRAME	90x90 mm (3.54x3.54in)
DEPTH	42mm (1.65in)
REFLECTOR ADJUSTABILITY	NO