

ELECTRICAL PROPERTIES



POWER	1,5W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, RED

bcm
BENEDETTI LIGHTING

CHARLOTTE A55

3407/K1.5W-A55



MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	140 lm		
LIGHTNESS 1mt	65 lx		
LIGHTNESS 2mt	16 lx		
LIGHTNESS 3mt	7 lx		



FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

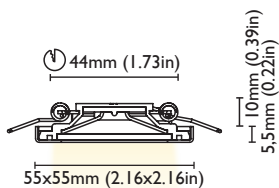

CUT OUT	44 mm (1.73in)
FRAME	55x55 mm (2.16x2.16in)
DEPTH	10 mm (0.39in)
REFLECTOR ADJUSTABILITY	NO

ELECTRICAL PROPERTIES



POWER	2W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

CHARLOTTE A70

3407/K2W-A70




MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	240 lm		
LIGHTNESS 1mt	111 lx		
LIGHTNESS 2mt	28 lx		
LIGHTNESS 3mt	12 lx		



FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

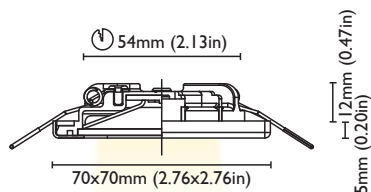

CUT OUT	54 mm (2.13in)
FRAME	70x70 mm (2.76x2.76in)
DEPTH	12 mm (0.47in)
REFLECTOR ADJUSTABILITY	NO

ELECTRICAL PROPERTIES



POWER 4W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

CHARLOTTE A80

3407/K4W-A80



MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE FIXED DOWNLIGHT FOR
EXTERIOR/INTERIOR

FRAME AISI 316L

HEATSINK SPECIAL COMPOUND


SCREEN OPAL

MOUNTING SYSTEM SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	460 lm		
LIGHTNESS 1mt	212 lx		
LIGHTNESS 2mt	53 lx		
LIGHTNESS 3mt	24 lx		

FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

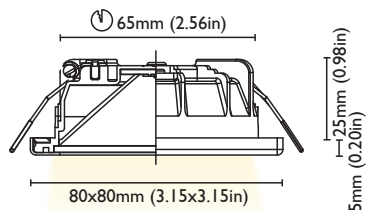

CUT OUT 65 mm (2.56in)

FRAME 80x80 mm (3.15x3.15in)

DEPTH 25 mm (0.98in)

REFLECTOR ADJUSTABILITY NO

ELECTRICAL PROPERTIES



POWER	6W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

CHARLOTTE A90

3407/K6W-A90



MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	610 lm		
LIGHTNESS 1mt	282 lx		
LIGHTNESS 2mt	70 lx		
LIGHTNESS 3mt	31 lx		

FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

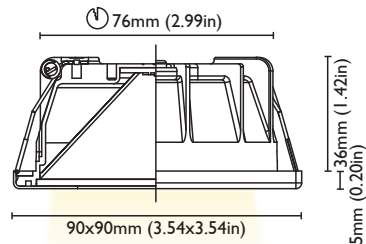

CUT OUT	76 mm (2.99in)
FRAME	90x90 mm (3.54x3.54in)
DEPTH	36 mm (1.42in)
REFLECTOR ADJUSTABILITY	NO