

ELECTRICAL PROPERTIES



POWER	2W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

ATLANTA A80

3415/K2W-A80




MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	ADJUSTABLE DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	240 lm		
LIGHTNESS 1mt	111 lx		
LIGHTNESS 2mt	28 lx		
LIGHTNESS 3mt	12 lx		



FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

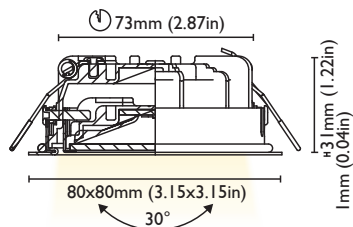

CUT OUT	73mm (2.87in)
FRAME	80x80 mm (3.15x3.15in)
DEPTH	31mm (1.22in)
REFLECTOR ADJUSTABILITY	15° x 2

ELECTRICAL PROPERTIES



POWER	4W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

ATLANTA A90

3415/K4W-A90



MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	ADJUSTABLE DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	460 lm		
LIGHTNESS 1mt	212 lx		
LIGHTNESS 2mt	53 lx		
LIGHTNESS 3mt	24 lx		



FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

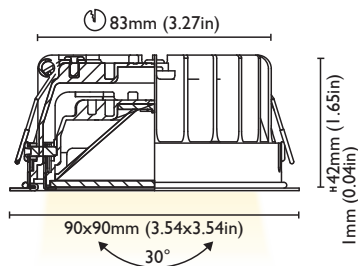

CUT OUT	83mm (3.27in)
FRAME	90x90 mm (3.54x3.54in)
DEPTH	42mm (1.65in)
REFLECTOR ADJUSTABILITY	15° x 2