

ELECTRICAL PROPERTIES



POWER 2W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

COLORADO A77

3419/K2W-A77



MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE FIXED DOWNLIGHT
FOR EXTERIOR/INTERIOR

FRAME AISI 316L

HEATSINK SPECIAL COMPOUND


TOP POLISHED GLASS

MOUNTING SYSTEM SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	240 lm		
LIGHTNESS 1mt	111 lx		
LIGHTNESS 2mt	28 lx		
LIGHTNESS 3mt	12 lx		

FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

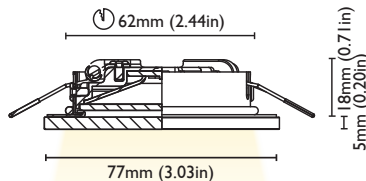

CUT OUT 62mm (2.44in)

FRAME 77 mm (3.03in)

DEPTH 18mm (0.71 in)

REFLECTOR ADJUSTABILITY NO

ELECTRICAL PROPERTIES



POWER 4W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

COLORADO A87

3419/K4W-A87



MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE FIXED DOWNLIGHT
FOR EXTERIOR/INTERIOR


FRAME AISI 316L

HEATSINK SPECIAL COMPOUND

TOP POLISHED GLASS


MOUNTING SYSTEM SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	460 lm		
LIGHTNESS 1mt	212 lx		
LIGHTNESS 2mt	53 lx		
LIGHTNESS 3mt	24 lx		



FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

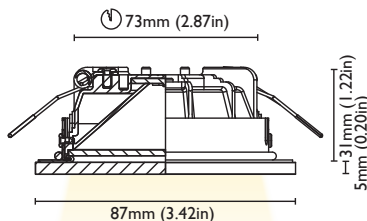

CUT OUT 73mm (2.87in)

FRAME 87 mm (3.42in)

DEPTH 31 mm (1.22in)

REFLECTOR ADJUSTABILITY NO