

ELECTRICAL PROPERTIES



POWER	1,5W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, RED


COLOUR	3000K	BEAM	25°
CRI	>80		
LUMEN OUTPUT	140 lm		
LIGHTNESS 1mt	331 lx		
LIGHTNESS 2mt	83 lx		
LIGHTNESS 3mt	37 lx		

FINISHES
POLISHED CHROME

bcm
BENEDETTI LIGHTING

CATALINA

2182/K1.5W-I

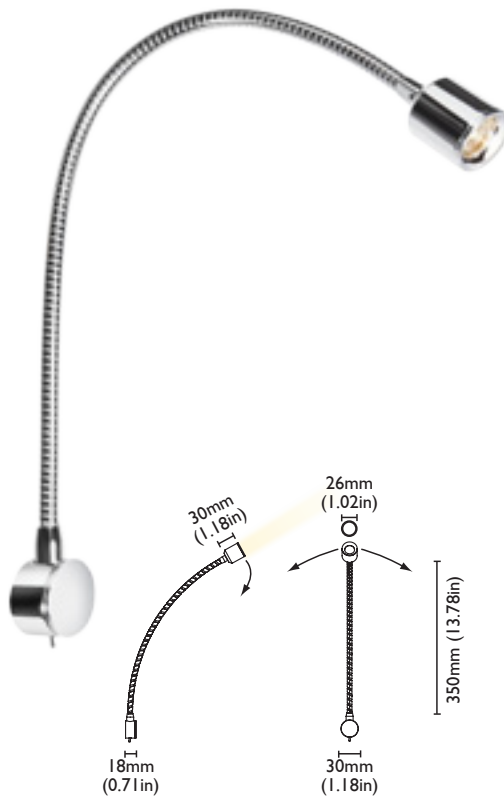

MECHANICAL PROPERTIES



IP RATE	IP40
FIXTURE	READING LIGHT
BODY	BRASS
SCREEN	LENS
MOUNTING SYSTEM	SCREWS

BASE DIAMETER	30 mm (1.18in)
REFLECTOR WIDTH	26 mm (1.02in)
FLEXIBLE LENGTH	350 mm (13.78in)
REFLECTOR ADJUSTABILITY	YES