

ELECTRICAL PROPERTIES



POWER 2W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

ASPEN A77S
3418/K2W-A77S



MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE FIXED DOWNLIGHT
FOR EXTERIOR/INTERIOR

FRAME AISI 316L


HEATSINK SPECIAL COMPOUND

TOP SATIN GLASS

MOUNTING SYSTEM SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	215 lm		
LIGHTNESS 1mt	99 lx		
LIGHTNESS 2mt	25 lx		
LIGHTNESS 3mt	11 lx		

FINISHES
WHITE S.STEEL

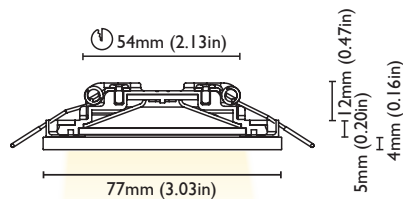

CUT OUT 54 mm (2.13in)

FRAME 77 mm (3.03in)

DEPTH 12 mm (0.47in)

REFLECTOR ADJUSTABILITY NO

ELECTRICAL PROPERTIES



POWER 4W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

ASPEN A87S

3418/K4W-A87S



MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE FIXED DOWNLIGHT
FOR EXTERIOR/INTERIOR

FRAME AISI 316L


HEATSINK SPECIAL COMPOUND

TOP SATIN GLASS

MOUNTING SYSTEM SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	415 lm		
LIGHTNESS 1mt	192 lx		
LIGHTNESS 2mt	48 lx		
LIGHTNESS 3mt	21 lx		

FINISHES
WHITE S.STEEL

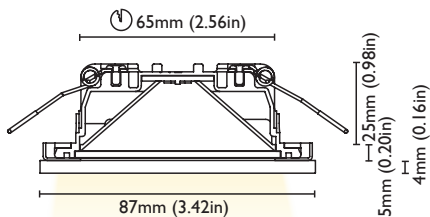

CUT OUT 65 mm (2.56in)

FRAME 87 mm (3.42in)

DEPTH 25 mm (0.98in)

REFLECTOR ADJUSTABILITY NO