

ELECTRICAL PROPERTIES



POWER	1,5W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, RED

bcm
BENEDETTI LIGHTING

CALIFORNIA A60

3423/K1.5W-A60



MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K
CRI	>80
LUMEN OUTPUT	60 lm

FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

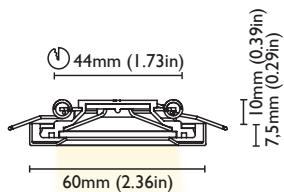

CUT OUT	44 mm (1.73in)
FRAME	60 mm (2.36in)
DEPTH	10 mm (0.39in)
REFLECTOR ADJUSTABILITY	NO

ELECTRICAL PROPERTIES



POWER 2W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

CALIFORNIA A75

3423/K2W-A75



MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE FIXED DOWNLIGHT
FOR EXTERIOR/INTERIOR

FRAME AISI 316L

HEATSINK SPECIAL COMPOUND

SCREEN OPAL

MOUNTING SYSTEM SPRINGS

COLOUR 3000K

CRI >80


LUMEN OUTPUT 100 lm

FINISHES

POLISHED S.STEEL

BRUSHED S.STEEL

WHITE S.STEEL

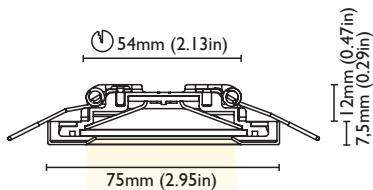

CUT OUT 54 mm (2.13in)

FRAME 75 mm (2.95in)

DEPTH 12mm (0.47in)

REFLECTOR ADJUSTABILITY NO

ELECTRICAL PROPERTIES



POWER 4W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

bcm
BENEDETTI LIGHTING

CALIFORNIA A85

3422/K4W-A85



MECHANICAL PROPERTIES



IP RATE IP66

FIXTURE FIXED DOWNLIGHT
FOR EXTERIOR/INTERIOR

FRAME AISI 316L

HEATSINK SPECIAL COMPOUND

SCREEN OPAL

**MOUNTING
SYSTEM** SPRINGS

COLOUR 3000K

CRI >80


LUMEN OUTPUT 200 lm

FINISHES

POLISHED S.STEEL

BRUSHED S.STEEL

WHITE S.STEEL

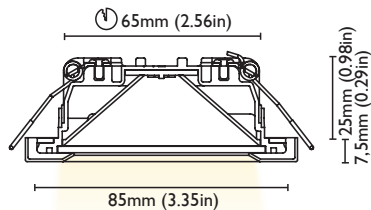

CUT OUT 65 mm (2.56in)

FRAME 85 mm (3.35in)

DEPTH 25mm (0.98in)

**REFLECTOR
ADJUSTABILITY** NO

ELECTRICAL PROPERTIES



POWER 6W

SUPPLY COSTANT VOLTAGE 8-32 VDC
(DRIVER ON BOARD)

PROTECTION FUSE - POLARITY REVERSE
SPIKE FILTER

DIMMABLE YES

LIGHT SOURCE OSRAM POWER LED

LED COLOUR 3000K, 3000K+RED

COLOUR 3000K

CRI >80

LUMEN OUTPUT 260 lm

FINISHES

POLISHED S.STEEL

BRUSHED S.STEEL

WHITE S.STEEL

bcm
BENEDETTI LIGHTING

CALIFORNIA A95

3423/K6W-A95



MECHANICAL PROPERTIES



IP RATE IP66


FIXTURE FIXED DOWNLIGHT
FOR EXTERIOR/INTERIOR

FRAME AISI 316L

HEATSINK SPECIAL COMPOUND

SCREEN OPAL

MOUNTING SYSTEM SPRINGS

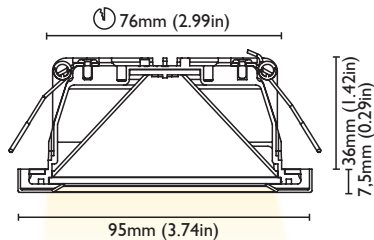

CUT OUT 76 mm (2.99in)

FRAME 95 mm (3.74in)

DEPTH 36mm (1.42in)

REFLECTOR ADJUSTABILITY NO