

CATALOGUE
english

 **idea**



IDEA. AS MANY SOLUTIONS AS THERE ARE IDEAS.

From the meticulous design of the Classica plate to the rounded contours of the Rondò plate. From the timeless appeal of anthracite grey buttons to the modest sobriety of white buttons. Fifty-one colours and four different materials: solid wood; metal; technopolymer, glossy and silky. With Idea the installation solutions are numerous, and freedom of choice is maximised. Now even your electrical system can be matched to your home decor style.



Idea Classica. The meticulous design of the Classica cover plate with anthracite grey buttons.



Idea Rondò. The soft design of the Rondò cover plate with white buttons.

MATERIALS.

A wide selection, of materials first and foremost: wood, metal, silk, technopolymer, all available in various colours. Plates with warm and classic colours, with sophisticated hues and bright shades to match with anthracite grey or white buttons. With the greatest freedom of design choice.

DIE-CAST METAL - CLASSICA



01 White 05 Amaranth 07 Forest green 08 Sage green



10 Ivory 11 Black 12 Cobalt blue 21 Metallized silver



22 Metallized bronze 23 Metallized anthracite 24 Metallized titanium 25 Metallized bordeaux



26 Metallized powder blue 27 Iridescent champagne 28 Iridescent euro blue 29 Iridescent petroleum



31 Black chrome 32 Polished gold 33 Matt gold 34 Brushed nickel



36 Chrome 37 Antique brass 46 Slate grey

DIE-CAST METAL - RONDÒ



01 White 05 Amaranth 07 Forest green 08 Sage green



10 Ivory 11 Black 12 Cobalt blue 21 Metallized silver



22 Metallized bronze 23 Metallized anthracite 24 Metallized titanium 25 Metallized bordeaux



26 Metallized powder blue 27 Iridescent champagne 28 Iridescent euro blue 29 Iridescent petroleum




31 Black chrome 32 Polished gold 33 Matt gold 34 Brushed nickel



36 Chrome 37 Antique brass 46 Slate grey

NATURAL WOOD - CLASSICA



51 Acero naturale

53 Ciliegio naturale

55 Noce naturale

56 Wengé naturale



57 Teak naturale

58 Mogano naturale

NATURAL WOOD - RONDÒ



51 Maple

53 Cherry

55 Walnut

56 Wengé



57 Teak

58 Mahogany

TECHNOPOLYMER - CLASSICA



01 Bianco brillante

02 Bianco granito

04 Bianco Idea

07 Rosso rubino



10 Blu zaffiro

13 Verde smeraldo

15 Grigio grafite

16 Nero

TECHNOPOLYMER - RONDÒ



01 Bright white

02 Granite white

04 Idea white

07 Ruby red



10 Sapphire blue

13 Emerald green

15 Graphite grey

16 Black

SILK - CLASSICA



01 White

02 Granite white

04 Idea white

07 Red



10 Blue

13 Green

15 Graphite

16 Black

SILK - RONDÒ



01 White

02 Granite white

04 Idea white

07 Red



10 Blue

13 Green

15 Graphite

16 Black


General features

Versatile and modular solutions for an extensive installation

Control equipment and socket outlets how and where you want them: a wide range of devices with great installation versatility that meet major international standards. Thanks to the different modularity of the devices (from 1 to 3 modules), different installation standards (with cover plates of from 1 to 18 modules) and fixing the device to the mounting frame (inserting/removing) it is possible to design installation solutions with a high level of safety.


Modular devices and cover plates

The modular device with from 1 to 3 modules lets you install multiple devices of different modularity in a single mounting frame, up to a composition of 18 modules for cover plates size 6+6+6. The mounting frame that installs the devices is equipped with interlocking teeth that provide strong and reliable fixing for each single device and allows perfect alignment between devices such as to create an orderly and visually pleasing stylistic effect.

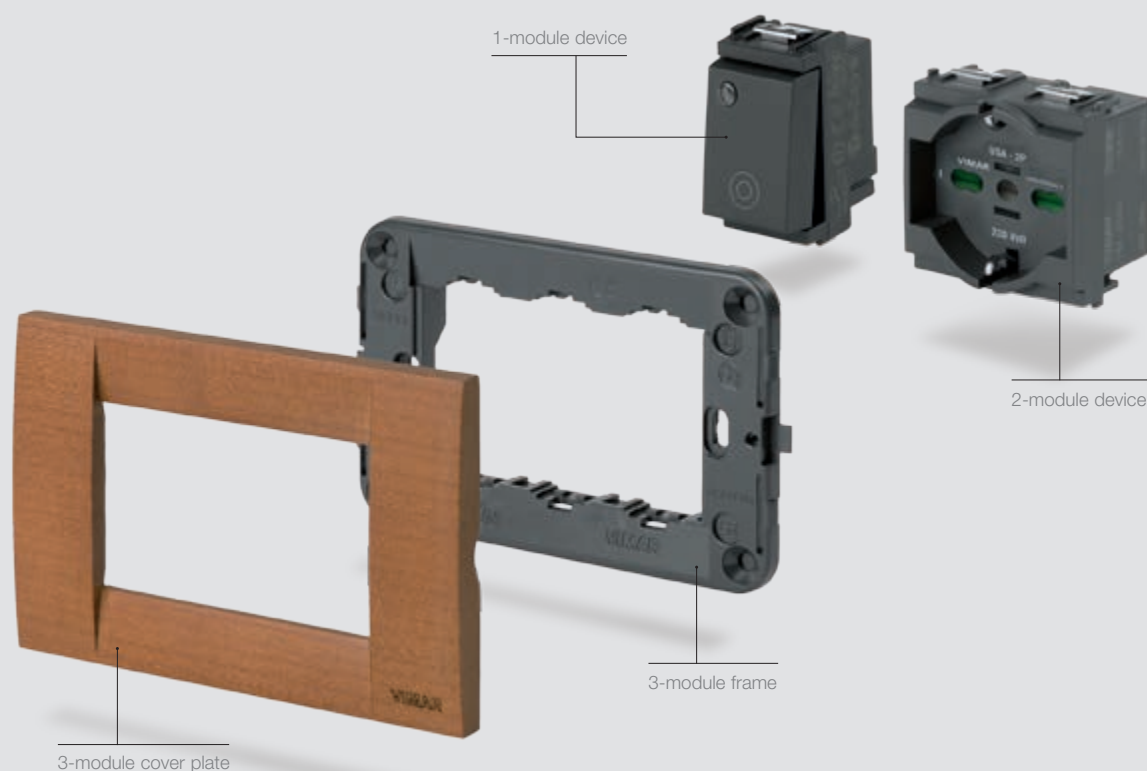


Flexible installation


The images show how different pairs of devices from 1 to 3 modules can be installed in the same mounting frame.

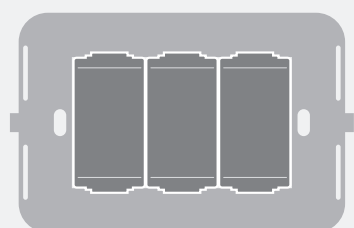

3 x 1-module



1 x 1-module and 1 x 2-module




1 x 3-module

General features

Controls

Controlling the light, activating a scenario or managing loads are just some of the many uses of energy. The combination of mechanics and technology enables simplifying these daily gestures in operating a simple device, as a rocker or a push-button, with precision and an intuitive understanding of the associated functions.



Backlighting and customization

The backlighting with different colours makes the controls visible even in the dark, while the symbols, either laser-engraved or customized on site, always give a clear indication of the various functions.



Button colour versions

For the Idea controls, two different colours: from the lightness of white to the rigour of anthracite grey. In the name of a technology that has never been separated from design.





Wiring with screw clamps

All Idea devices use traditional wiring with screw clamps which consists of clamps with a curved metal plate that locks the cable via a crosshead screw and is ideal for flexible or semi-rigid cables with a cross-section of from 0,5 mm² to 2,5 mm².


Screw clamps.

Composed of a curved metal plate that clamps the cable by means of a crosshead screw.

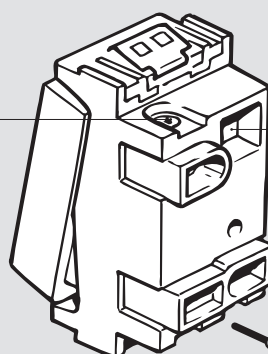

Special housing for the signalling unit.

Special housing for the signalling unit, backlighting and visibility of controls even in the dark.



Use of cables with different cross-sections.

Wiring with a flexible or semi-rigid cable with a cross-section of from 0,5 mm² to 2,5 mm².

General features

Devices for control

Different sized buttons and cover plates in two designs for every installation requirement. Elegant symbols that instantly identify the functions, soft and silent button actions, for the ultimate in home comfort.



Modular design



Devices



Night&day symbols

Devices for energy efficiency

Thermostats that adjust the temperature to actual everyday needs; devices that control electrical loads and monitor consumption; programmable timer-switches that switch the devices on at the right time, to rationally manage all the energy in your home.



Time delay switch



Load control



Timer-thermostat

General features

Devices for comfort

From the morning wake-up call to the temperature that welcomes you on your return home, to switching on the outside lights in the evening. You can plan the climate you prefer in every single room, create the right atmosphere for a special occasion or a precise moment of the day by adjusting the brightness of the lights. To get the greatest possible pleasure from your home.



Dimmer



Timer-thermostat



Timer switch

Devices for safety

Accurate, constant monitoring of people and property: you're safe 24 hours a day. Technical alarms that instantly warn of a gas leak, power surge, black out or if intruders are detected, sending you a text message; interlocked sockets and emergency lighting, always ready to cut in and ensure your safety.



Transponder card and key reader



Methane gas detector



Interlocked socket outlet

HOME AUTOMATION: ENERGY EFFICIENCY, SAFETY AND COMFORT WORK TOGETHER.

Inside a home automation building the various functions dialogue with each other comprehensively and continually, facilitating large as well as small daily actions and ensuring greater energy efficiency, safety, comfort and control.

Many solutions and all controlled from a single point. Centralized supervision to optimize energy consumption, check who is at your door, regulate the climate and lighting, move the roller shutters, activate or deactivate the burglar alarm system, view the filming of the video surveillance cameras. Because we want you to experience your home in the best way possible.





ENERGY EFFICIENCY

Monitor and view the energy consumed by single loads, efficiently control the temperature for greater energy awareness.



SAFETY AND SECURITY

A simple and effective alarm system, devices for detecting people entering, a wide range of devices to keep the rooms under control.



COMFORT

The desired temperature throughout the house, controlling and programming it for different rooms and home automation controls to create preset scenarios depending on your needs.



CONTROL

All the functions in the dwelling can also be controlled locally by numerous devices, to personalize the room according to the needs of the moment.

BUILDING AUTOMATION SYSTEM FOR EFFICIENCY, SAFETY AND SECURITY, COMFORT AND CONTROL OF BUILDINGS.

From lighting to access control, from monitoring consumption to dialogue with other devices in the structure, it can all be managed via Well-contact Plus. A unique system developed on the KNX standard that enables programming, coordinating and supervising all the functions in the building whether it be an office, hotel, shop or gym.





ENERGY EFFICIENCY

Integration with the systems already present in the structure allows real benefits, avoids wasting energy and improves wellness.



SAFETY AND SECURITY

Transponder reader to open the electrical lock and turn on the lights in the rooms only for authorized persons.



COMFORT


KNX controls to automate all the functions of the building from the roller shutters to the lighting.



CONTROL

Supervising and controlling a room or the entire building via stylish devices featuring intuitive icons.


General features

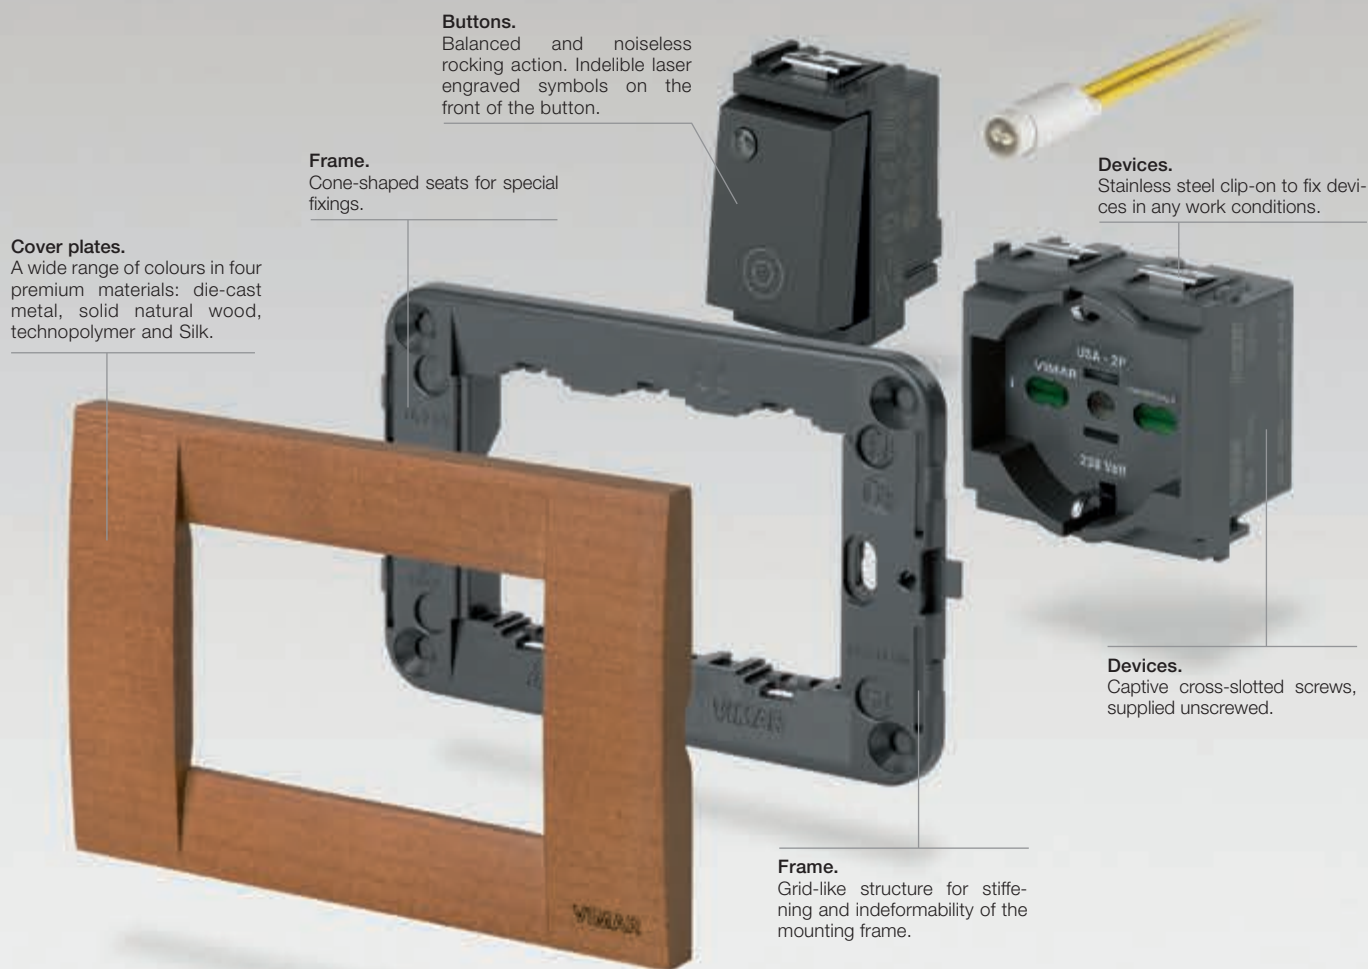


Reduced module

The most important functions are realized also with a reduced module to have 2 appliances or 1 appliance sized 2 modules in $\varnothing$ 60 mm or in square mounting boxes.


Device fixing and removing





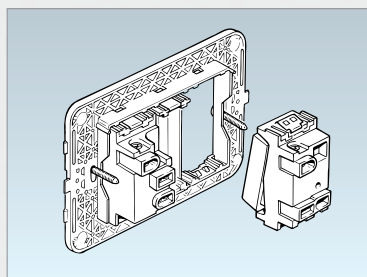


Fixing from rear of the mounting frame.

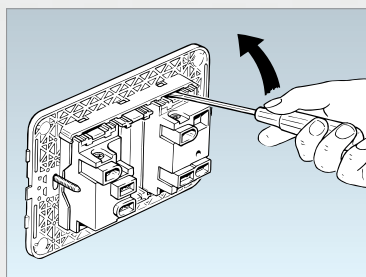

Removal with use of a tool, possible also from the front of the device.

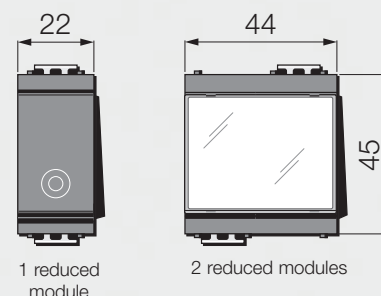

Composition	Box	Frame	Module	Cover plate
 Panel mounting	 Panel mounting	 With screws	 1-module	 From 1 to 2 modules Classica or Rondò*
 From 1 to 2 modules	 Flush mounting  Surface mounting	 1 module with/without screws or with claws  2 reduced-modules with/without screws or with claws	 1-module  2 x 1-reduced-module	 1 or 2 reduced-module Classica or Rondò*
 For 2 central modules	 Flush mounting  Surface mounting	 Without screws  With screws	 2 x 1-module  1 x 2-module  3 x 1-module  1- and 2-module  1 x 3-module	 From 3 to 6 modules Classica or Rondò*
 Table mounting 3 and 6 modules	 Table box		 3 x 1-module  1- and 2-module  1 x 3-module	 3 and 6 modules Classica only*

* For other composition, see 'Types of mounting' from page 50

Grey

White

Blank modules and cable outlets



16540 Blank module, grooved front. Depth: 10,5 mm
16542 Blank module, smooth front. Depth: 10,5 mm
16541 Cable outlet with cord-grip. Depth: 10,5 mm



16540.B Blank module, grooved front. Depth: 10,5 mm
16542.B Blank module, smooth front. Depth: 10,5 mm
16541.B Cable outlet with cord-grip. Depth: 10,5 mm

1P 1-way switches 250 V~



16000 10 AX. Depth: 23 mm
16001 16 AX. Depth: 23 mm
16001.F 16 AX, luminous indicator. Depth: 23 mm
16021 16 AX, luminous°. Depth: 23 mm



16021.M 16 AX, luminous° - 2 modules. Depth: 23 mm
16021.G 16 AX, luminous° - 3 modules. Depth: 23 mm



16000.B 10 AX. Depth: 23 mm
16001.B 16 AX. Depth: 23 mm
16001.F.B 16 AX, luminous indicator. Depth: 23 mm
16021.B 16 AX, luminous°. Depth: 23 mm



16021.M.B 16 AX, luminous° - 2 modules. Depth: 23 mm
16021.G.B 16 AX, luminous° - 3 modules. Depth: 23 mm

2P 1-way switches 250 V~



16016 16 AX. Depth: 25,5 mm
16016.F 16 AX, luminous indicator. Depth: 25,5 mm
16036 16 AX, luminous°. Depth: 25,5 mm



16016.B 16 AX. Depth: 25,5 mm
16016.F.B 16 AX, luminous indicator. Depth: 25,5 mm
16036.B 16 AX, luminous°. Depth: 25,5 mm

1P 2-way switches 250 V~



16004 10 AX. Depth: 23 mm
16005 16 AX. Depth: 23 mm
16005.F 16 AX, luminous indicator. Depth: 23 mm
16025 16 AX, luminous°. Depth: 23 mm



16025.M 16 AX, luminous° - 2 modules. Depth: 23 mm



16004.B 10 AX. Depth: 23 mm
16005.B 16 AX. Depth: 23 mm
16005.F.B 16 AX, luminous indicator. Depth: 23 mm
16025.B 16 AX, luminous°. Depth: 23 mm



16025.M.B 16 AX, luminous° - 2 modules. Depth: 23 mm

Grey

White

1P reversing switches 250 V~



16013
16 AX,
Depth:
25,5 mm



16013.F
16 AX,
luminescent indicator.
Depth: 25,5 mm



16013.B
16 AX,
Depth:
25,5 mm



16013.F.B
16 AX,
luminescent indicator.
Depth: 25,5 mm

1P NO push buttons 250 V~



16080
10 A,
general
symbol.
Depth:
23 mm



16080.C
10 A,
bell symbol.
Depth:
23 mm



16080.P
10 A,
key symbol.
Depth:
23 mm



16081
10 A,
light symbol.
Depth:
23 mm



16080.F
10 A, general,
luminescent
indicator.
Depth:
23 mm



16080.C.F
10 A, bell,
luminescent
indicator.
Depth:
23 mm



16080.B
10 A,
general
symbol.
Depth:
23 mm



16080.C.B
10 A,
bell symbol.
Depth:
23 mm



16080.P.B
10 A,
key symbol.
Depth:
23 mm



16081.B
10 A,
light symbol.
Depth:
23 mm



16080.F.B
10 A, general,
luminescent
indicator.
Depth:
23 mm



16080.C.F.B
10 A, bell,
luminescent
indicator.
Depth:
23 mm



16081.F
10 A, light,
luminescent
indicator.
Depth:
23 mm



16090
10 A, general
symbol,
luminous°.
Depth:
23 mm



16090.M
10 A, general
symbol, luminous°
- 2 modules.
Depth: 23 mm



16090.G
10 A, general symbol,
luminous° - 3 modules.
Depth: 23 mm



16081.F.B
10 A, light,
luminescent
indicator.
Depth:
23 mm



16090.B
10 A, general
symbol,
luminous°.
Depth:
23 mm



16090.M.B
10 A, general
symbol, luminous°
- 2 modules.
Depth: 23 mm



16090.G.B
10 A, general symbol,
luminous° - 3 modules.
Depth: 23 mm

1P special push buttons



16083
NC 10 A 250 V~,
cord-operated.
Depth: 23 mm



16084
NO 10 A 250 V~,
cord-operated.
Depth: 23 mm



16190
NO 10 A 12-24 V~ (SELV),
lightable name-plate°
- 2 modules.
Depth: 28 mm



16083.B
NC 10 A 250 V~,
cord-operated.
Depth: 23 mm



16084.B
NO 10 A 250 V~,
cord-operated.
Depth: 23 mm



16190.B
NO 10 A 12-24 V~ (SELV),
lightable name-plate°
- 2 modules.
Depth: 28 mm

Additional push buttons 250 V~



16101
1P NO 16 A,
(ON).
Depth:
32,5 mm



16107
1P NO 16 A,
(ON), auxiliary
contact.
Depth:
32,5 mm



16104
1P NC 16 A,
(OFF).
Depth:
32,5 mm



16110
1P NC 16 A,
(OFF), auxiliary
contact.
Depth:
32,5 mm



16101.B
1P NO 16 A,
(ON).
Depth:
32,5 mm



16107.B
1P NO 16 A,
(ON), auxiliary
contact.
Depth:
32,5 mm



16104.B
1P NC 16 A,
(OFF).
Depth:
32,5 mm



16110.B
1P NC 16 A,
(OFF), auxiliary
contact.
Depth:
32,5 mm

Grey

White

1P NO push buttons 250 V~



16121
Two 10 A
independents.
Depth:
28 mm



16126.B
10 A,
white
diffuser°.
Depth:
28 mm



Δ 16126.V
10 A,
green
diffuser°.
Depth:
28 mm



16121.B
Two 10 A
independents.
Depth:
28 mm



16126.B.B
10 A,
white
diffuser°.
Depth:
28 mm



Δ 16126.V.B
10 A,
green
diffuser°.
Depth:
28 mm



Δ 16126.R.B
10 A,
red
diffuser°.
Depth:
28 mm

Switches with directional arrows 250 V~ (central OFF position)



16140
1P 10 AX
switch.
Depth:
33,5 mm



16145
2P 10 AX
switch.
Depth:
33,5 mm



16150
1P 10 A
2-way push-
button.
Depth:
33,5 mm



16155
2P 10 A
2-way push-
button.
Depth:
33,5 mm



16140.B
1P 10 AX
switch.
Depth:
33,5 mm



16145.B
2P 10 AX
switch.
Depth:
33,5 mm



16150.B
1P 10 A
2-way push-
button.
Depth:
33,5 mm



16155.B
2P 10 A
2-way push-
button.
Depth:
33,5 mm

1P special switches 250 V~



16092
NC 10 A push,
general,
luminous°.
Depth: 23 mm



16092.B
NC 10 A push,
general,
luminous°.
Depth: 23 mm

Key operated switches 250 V~ (for switches with unified key 000 add .CU to the basic code)



16165
2P 16 AX 1-way switch
16165.S
As above, key
removable in 'O' (OFF).
Depth: 32,5 mm



16185
2P NO 16 A
push button.
Depth:
32,5 mm



16165.B
2P 16 AX 1-way switch
16165.S.B
As above, key
removable in 'O' (OFF).
Depth: 32,5 mm



16185.B
2P NO 16 A
push button.
Depth:
32,5 mm

Dimmers (with MOSFET+TRIAC-technology - 230 V~ 50/60 Hz)



Δ 16602
40-300 VA.
Depth:
41 mm



***16608**
MASTER,
40-500/
40-800 W,
40-300/
40-500 VA.
Depth:
41 mm



***16609**
SLAVE,
40-500/
40-800 W,
40-300/
40-500 VA.
Depth:
41 mm



Δ 16601.B
SLAVE,
40-500 W/VA,
40-300 VA.
Depth:
41 mm



Δ 16602.B
40-300 VA.
Depth:
41 mm



***16608.B**
MASTER,
40-500/
40-800 W,
40-300/
40-500 VA.
Depth:
41 mm



***16609.B**
SLAVE,
40-500/
40-800 W,
40-300/
40-500 VA.
Depth:
41 mm

Grey

White

Dimmers



▲16559.1
MASTER,
universal.
Depth:
41,4 mm

▲16559
MASTER,
universal
16559.120
As above,
120 V~.
Depth:
41,4 mm

▲16603.1
MASTER,
universal,
with poten-
tiometer.
Depth:
41,4 mm

▲16603
MASTER,
universal,
with poten-
tiometer
16603.120
As above,
120 V~.
Depth:
41,4 mm

16604
SLAVE,
universal
16604.120
As above,
120 V~.
Depth:
41,4 mm



16560
100-500 W
230 V~
50/60 Hz,
potentiometer.
Depth:
39,5 mm

16563
100-500 W
230 V~
50/60 Hz,
push-push and
potentiometer.
Depth:
39,5 mm

***16556**
60-900 W/
60-300 VA
230 V~
50/60 Hz,
potentiometer.
Depth:
39,5 mm

16557
30-500 W/
30-300 VA
120 V~
50/60 Hz,
potentiometer.
Depth:
39,5 mm



▲16559.1.B
MASTER,
universal.
Depth:
41,4 mm

▲16559.B
MASTER,
universal
16559.120.B
As above,
120 V~.
Depth:
41,4 mm

▲16603.1.B
MASTER,
universal,
with poten-
tiometer.
Depth:
41,4 mm

▲16603.B
MASTER,
universal,
with poten-
tiometer
16603.120.B
As above,
120 V~.
Depth:
41,4 mm

16604.B
SLAVE,
universal
16604.120.B
As above,
120 V~.
Depth:
41,4 mm



16560.B
100-500 W
230 V~
50/60 Hz,
potentiometer.
Depth:
39,5 mm

16563.B
100-500 W
230 V~
50/60 Hz,
push-push and
potentiometer.
Depth:
39,5 mm

***16556.B**
60-900 W/
60-300 VA
230 V~
50/60 Hz,
potentiometer.
Depth:
39,5 mm

16557.B
30-500 W/
30-300 VA
120 V~
50/60 Hz,
potentiometer.
Depth:
39,5 mm

Electronic transformers (230-240 V~ 50/60 Hz)



▲01860.60
20-60 W,
12 V~ (SELV) output

01860.105
20-105 W,
12 V~ (SELV) output

Bleeder



01873
230 V~ 50 Hz, flush mounting
(rear side)

01873.120
As above, 120 V~

Electronic supply unit



01874
230 V~ 50 Hz, for controllable
LED lamps, 12-24 Vdc
01874.120
As above, 120 V~

01875
230 V~ 50 Hz, for controllable
LED lamps, 350/500/700 mA
01875.120
As above, 120 V~

Infrared switches



16622
Receiver,
NO 6 A 230 V~
relay output.
Depth:
36,5 mm

16623
Receiver, 4 A 230 V~
relay output, for roller
shutters - 2 modules.
Depth: 36,5 mm

16625
Receiver 230 V~
+ 40-450 W/VA
40-300 VA dimmer.
Depth: 41 mm



16622.B
Receiver,
NO 6 A 230 V~
relay output.
Depth:
36,5 mm

16623.B
Receiver, 4 A 230 V~
relay output, for roller
shutters - 2 modules.
Depth: 36,5 mm

16625.B
Receiver 230 V~
+ 40-450 W/VA
40-300 VA dimmer.
Depth: 41 mm



01849
Remote control,
14-channel

Devices • Socket outlets

Grey

White


Infrared switches




Set/Reset push buttons



SICURY 2P+E Italian standard socket outlets 250 V~



SICURY 2P+E interlocked socket outlets with CB (120-230 V~ 50/60 Hz)

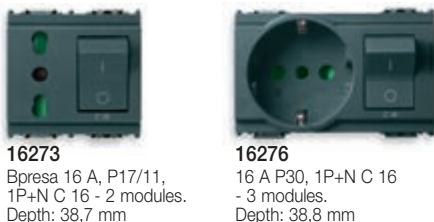

SICURY 2P+E interlocked socket outlets with RCBO - I_{Δn} 10 mA (120-230 V~ 50/60 Hz)



Socket outlets

Grey

White

Shaver supply units



16290
230 V~ 50/60 Hz, with isolating transformer 20 VA, 230 V~ and 120 V~ outputs - 3 modules.
Depth: 46 mm



16290.B
230 V~ 50/60 Hz, with isolating transformer 20 VA, 230 V~ and 120 V~ outputs - 3 modules.
Depth: 46 mm

SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)



16203.R
Bpresa 16 A P17/11, red.
Depth: 25 mm



Δ 16209.A
16 A P30, orange - 2 modules.
Depth: 29,5 mm



16209.R
16 A P30, red - 2 modules.
Depth: 29,5 mm



16209.V
16 A P30, green - 2 modules.
Depth: 29,5 mm



16210.R
16 A, universal, red - 2 modules.
Depth: 27 mm



16213
16 A, French, with locking device, grey - 2 modules.
Depth: 26,5 mm



16213.B
16 A, French, with locking device, white - 2 modules.
Depth: 26,5 mm



16213.R
16 A, French, with locking device, red - 2 modules.
Depth: 26,5 mm



01079
Spare releasing device for 16213

Socket outlets 250 V~ - German standard



16208
SICURY 2P+E 16 A, German - 2 modules.
Depth: 29,5 mm



16208.B
SICURY 2P+E 16 A, German - 2 modules.
Depth: 29,5 mm

Socket outlets 250 V~ - French standard




16212
SICURY 2P+E 16 A, French - 2 modules.
Depth: 26,5 mm




16212.B
SICURY 2P+E 16 A, French - 2 modules.
Depth: 26,5 mm

Socket outlets 250 V~ - English standard



16258
SICURY 2P+E 16 A, English - 2 modules.
Depth: 27,1 mm



16260
SICURY 2P+E 13 A, English - 2 modules.
Depth: 23,3 mm



16258.B
SICURY 2P+E 16 A, English - 2 modules.
Depth: 27,1 mm



16260.B
SICURY 2P+E 13 A, English - 2 modules.
Depth: 23,3 mm

Socket outlets 250 V~ - Swiss standard



16226
2P+E 10 A, Swiss, 13 type.
Depth: 40,5 mm



16226.B
2P+E 10 A, Swiss, 13 type.
Depth: 40,5 mm

Socket outlets

Grey

White

Socket outlets 250 V~ - Euro-American standard



16233
2P 15 A,
Euro-American
ø 4,8 mm.
Depth:
28,5 mm

16234
SICURY 2P 15 A
Euro-American
ø 4,8 mm.
Depth:
28,5 mm



16233.B
2P 15 A,
Euro-American
ø 4,8 mm.
Depth:
28,5 mm

16234.B
SICURY 2P 15 A
Euro-American
ø 4,8 mm.
Depth:
28,5 mm

Socket outlets 127 V~ - USA and Arabian standard



16242
SICURY 15 A,
USA and Arabian.
Depth: 27,5 mm

16243
Two SICURY 15 A, USA and
Arabian - 3 modules.
Depth: 26,5 mm



16242.B
SICURY 15 A,
USA and Arabian.
Depth: 27,5 mm

16243.B
Two SICURY 15 A, USA and
Arabian - 3 modules.
Depth: 26,5 mm



16245
15 A, USA and
Arabian.
Depth: 27,5 mm

16246
Two 15 A, USA and Arabian
- 3 modules.
Depth: 26,5 mm



16245.B
15 A, USA and
Arabian.
Depth: 27,5 mm

16246.B
Two 15 A, USA and Arabian
- 3 modules.
Depth: 26,5 mm

Socket outlets 250 V~ - American standard



16247
2P+E 15 A,
American.
Depth: 28 mm



16247.B
2P+E 15 A,
American.
Depth: 28 mm

Socket outlets 250 V~ - Argentinian standard



16250
SICURY
2P+E 10 A,
Argentinian.
Depth: 26 mm

16253
SICURY 2P+E 20 A,
Argentinian
- 2 modules.
Depth: 27,8 mm



16250.B
SICURY
2P+E 10 A,
Argentinian.
Depth: 26 mm

16253.B
SICURY 2P+E 20 A,
Argentinian
- 2 modules.
Depth: 27,8 mm

Socket outlets 250 V~ - Chinese standard



16251
SICURY
2P+E 10 A,
Chinese.
Depth: 26 mm

16254
SICURY 2P+E 16 A,
Chinese
- 2 modules.
Depth: 27,8 mm



16251.B
SICURY
2P+E 10 A,
Chinese.
Depth: 26 mm

16254.B
SICURY 2P+E 16 A,
Chinese
- 2 modules.
Depth: 27,8 mm

Socket outlets • Signal reception socket outlets

Grey

White

Socket outlets 250 V~ - Australian standard



16261
SICURY 2P+E 10 A,
Australian - 2 modules.
Depth: 26,5 mm



16262
SICURY 2P+E 15 A,
Australian - 2 modules.
Depth: 26,5 mm



16261.B
SICURY 2P+E 10 A,
Australian - 2 modules.
Depth: 26,5 mm



16262.B
SICURY 2P+E 15 A,
Australian - 2 modules.
Depth: 26,5 mm

Socket outlets 250 V~ - Other standard



Δ*16305
2P 10 A,
recessed
contacts.
Depth:
25 mm



Δ*16305.B
2P 10 A,
recessed
contacts.
Depth:
25 mm

Special socket outlets



16300
2P 6 A 24 V
(SELV) for
01620 plug.
Depth:
26 mm



16301
2P 6 A 24 V
(SELV) for
01616 / 01617
plugs.
Depth:
26 mm



16332
5-pole
DIN 41524.
Depth:
10,5 mm



16345
2P 6 A 24 V
(SELV),
polarized.
Depth:
26 mm



16300.B
2P 6 A 24 V
(SELV) for
01620 plug.
Depth:
26 mm



16301.B
2P 6 A 24 V
(SELV) for
01616 / 01617
plugs.
Depth:
26 mm



16332.B
5-pole
DIN 41524.
Depth:
10,5 mm



16345.B
2P 6 A 24 V
(SELV),
polarized.
Depth:
26 mm



16333
3 RCA outlets,
screw terminals.
Depth: 10,5 mm



16333.B
3 RCA outlets,
screw terminals.
Depth: 10,5 mm



16368
USB outlet,
screw
terminals.
Depth:
31,3 mm



16334
HDMI outlet,
Keystone
connection.
Depth:
23,8 mm



▲16334.H
HDMI outlet,
Keystone connection
with 90° cable.
Depth:
28,4 mm



16368.B
USB outlet,
screw
terminals.
Depth:
31,3 mm



16334.B
HDMI outlet,
Keystone
connection.
Depth:
23,8 mm




▲16334.H.B
HDMI outlet,
Keystone connection
with 90° cable.
Depth:
28,4 mm

Signal reception socket outlets





Grey

White



Phone jacks

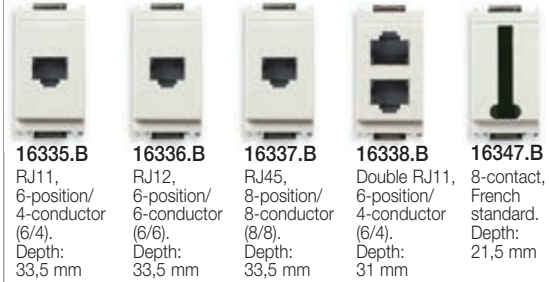



RJ45 data ports

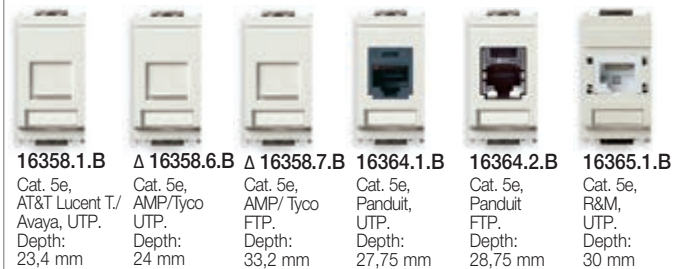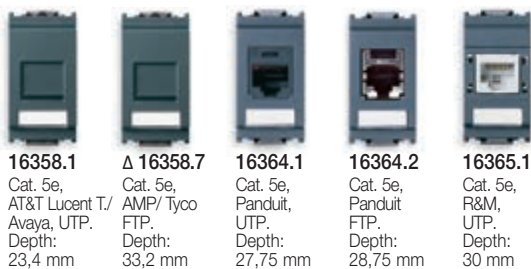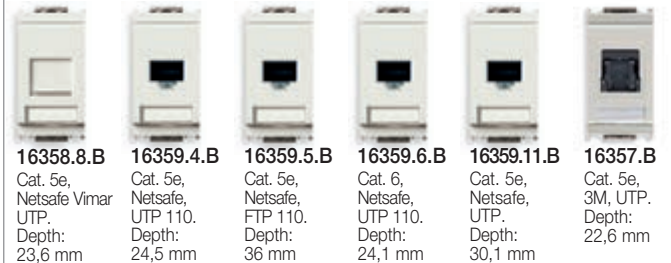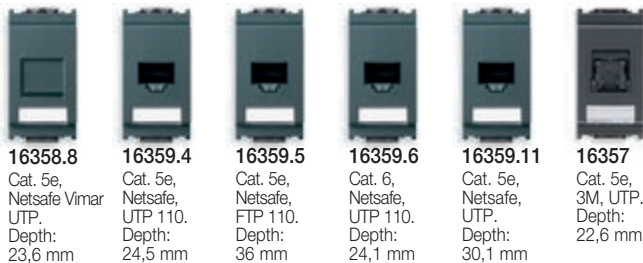

Adapters for data ports

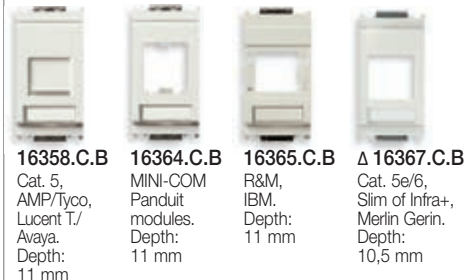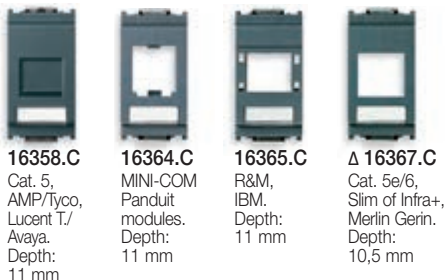

Data ports



Signal reception socket outlets • Signalling

Grey

White

Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)



16306.01
Single-connection
1 dB.
Depth: 22,3 mm



16306.10
Through-line
10 dB.
Depth: 22,1 mm



16306.01.B
Single-connection
1 dB.
Depth: 22,3 mm



16306.10.B
Through-line
10 dB.
Depth: 22,1 mm

Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (2 outputs: male and F-type female)



16307.01
Single-connection
1 dB - 2 modules.
Depth: 22,1 mm



16307.10
Through-line
10 dB - 2 modules.
Depth: 22,1 mm



16307.01.B
Single-connection
1 dB - 2 modules.
Depth: 22,1 mm



16307.10.B
Through-line
10 dB - 2 modules.
Depth: 22,1 mm

Coaxial F-type socket outlets



16331
With F type female
connector.
Depth: 10,5 mm



16331.B
With F type female
connector.
Depth: 10,5 mm

Coaxial TV 40-862 MHz socket outlets (1 output female)



***16320**
Single connection.
Depth: 29 mm



Δ*16320.S
Single connection,
2 cord-grips.
Depth: 29 mm



Δ*16321
Through-line,
20 dB.
Depth: 29 mm



Δ*16322
End-of-line,
20 dB.
Depth: 29 mm



***16320.B**
Single connection.
Depth: 29 mm



Δ*16321.B
Through-line,
20 dB.
Depth: 29 mm



Δ*16322.B
End-of-line,
20 dB.
Depth: 29 mm

Terminal resistors and coaxial TV-RD-SAT 2400 MHz connectors



16330
Z 75 Ω, for
frequencies up
to 2400 MHz



01644
Male, axial
cable entry



01645
Female, axial
cable entry



01634
Male, 90°-
cable entry



01635
Female, 90°-
cable entry



01654
Male F-type,
for RG59
cable

Electromechanical bells



16400
12 V~ (SELV)
50 Hz 8 VA.
Depth: 34 mm



16401
24 V~ (SELV)
50 Hz 8 VA.
Depth: 34 mm



16403
230 V~
50 Hz 8 VA.
Depth: 34 mm



16400.B
12 V~ (SELV)
50 Hz 8 VA.
Depth: 34 mm



16401.B
24 V~ (SELV)
50 Hz 8 VA.
Depth: 34 mm



16403.B
230 V~
50 Hz 8 VA.
Depth: 34 mm

Signalling

Grey

White

Electronic bells



16420

3-sound sequence (three-tone, two-tone, buzzer), supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 41,5 mm



16420.B

3-sound sequence (three-tone, two-tone, buzzer), supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 41,5 mm

Buzzers



16405

12 V~ (SELV)
50/60 Hz
8 VA.
Depth: 34 mm



16406

24 V~ (SELV)
50/60 Hz
8 VA.
Depth: 34 mm



16408

230 V~
50/60 Hz
8 VA.
Depth: 34 mm



16405.B

12 V~ (SELV)
50/60 Hz
8 VA.
Depth: 34 mm



16406.B

24 V~ (SELV)
50/60 Hz
8 VA.
Depth: 34 mm



16408.B

230 V~
50/60 Hz
8 VA.
Depth: 34 mm

Luminous indicator units (for ø 6,3x28 mm or ø 7x31 mm microtube lamps[°])



16431

White
diffuser.
Depth: 30,5 mm



16431.V

Green
diffuser.
Depth: 30,5 mm



16431.R

Red
diffuser.
Depth: 30,5 mm



16431.B

White
diffuser.
Depth: 30,5 mm



16431.V.B

Green
diffuser.
Depth: 30,5 mm



16431.R.B

Red
diffuser.
Depth: 30,5 mm

Double indicator units (for 2 signalling units[°])



16432

Neutral
diffusers.
Depth: 16 mm



Δ 16432.RV

Red and green
diffusers.
Depth: 16 mm



16432.B

Neutral
diffusers.
Depth: 16 mm



Δ 16432.RV.B

Red and green
diffusers.
Depth: 16 mm

Prismatic indicator units (for ø 6,3x28 mm or ø 7x31 mm microtube lamps[°])



16433

White
diffuser.
Depth: 30,5 mm




16433.V

Green
diffuser.
Depth: 30,5 mm



16433.R

Red
diffuser.
Depth: 30,5 mm



Lateral view



16433.B

White
diffuser.
Depth: 30,5 mm



16433.V.B

Green
diffuser.
Depth: 30,5 mm



16433.R.B

Red
diffuser.
Depth: 30,5 mm



16446

Indicator unit, 230 V~ 3 W, with white prismatic diffuser, for 14770, 14771, 14776 and 14777 lamps - 3 modules. Depth: 24,5 mm

Grey

White

Step marker lamps (for 12-24 V (SELV) 3 W ϕ 7x37 mm microtube lamps°)



16445
Step marker lamp with
adjustable beam - 3 modules.
Depth: 41 mm



16445.B
Step marker lamp with
adjustable beam - 3 modules.
Depth: 41 mm

Lighting devices



16448
230 V~ 50/60 Hz, FD 4W G5 lamp,
built-in 6-module frame.
Depth: 47,5 mm

TORCIA, electronic hand-lamps (with automatic emergency device)



16450
With high-efficiency LED, 230 V~ 50/60 Hz
- 2 modules

16449
As above, 120 V~ 50/60 Hz.
Depth: 41 mm



16450.B
With high-efficiency LED, 230 V~ 50/60 Hz
- 2 modules

16449.B
As above, 120 V~ 50/60 Hz.
Depth: 41 mm

Emergency lighting devices



16440
230 V~ 50/60 Hz, Ni-Cd battery,
FD 4W G5 lamp, built-in 6-module frame

Δ 16441
As above, 120 V~ 50/60 Hz.
Depth: 47,5 mm

Rechargeable batteries



00910
Ni-MH 4,8 V 80 mAh
battery spare part
for TORCIA



00911.1
Ni-Cd 2,4 V 1,3 Ah battery
spare part for emergency
lighting devices

Protection devices



16460
1P 16 A
250 V~ fuse
carrier.
Depth:
30,5 mm



16481
SCUDO,
transient voltage
suppressor.
Depth:
35,5 mm



16460.B
1P 16 A
250 V~ fuse
carrier.
Depth:
30,5 mm



16481.B
SCUDO,
transient voltage
suppressor.
Depth:
35,5 mm

1P+N circuit breakers (120-230 V~ 50/60 Hz)



16505.06
C 6, breaking
capacity
1500 A.
Depth:
38,5 mm



16505.10
C 10, breaking
capacity
3000 A.
Depth:
38,5 mm



16505.16
C 16, breaking
capacity
3000 A.
Depth:
38,5 mm



16505.06.B
C 6, breaking
capacity
1500 A.
Depth:
38,5 mm



16505.10.B
C 10, breaking
capacity
3000 A.
Depth:
38,5 mm



16505.16.B
C 16, breaking
capacity
3000 A.
Depth:
38,5 mm

Protection • Detection • Comfort

Grey

White

1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz)



16511.06
C 6, $I_{\Delta n}$ 10 mA,
breaking capacity
1500 A - 2 modules.
Depth: 38 mm



16511.10
C 10, $I_{\Delta n}$ 10 mA,
breaking capacity
3000 A - 2 modules.
Depth: 38 mm



16511.16
C 16, $I_{\Delta n}$ 10 mA,
breaking capacity
3000 A - 2 modules.
Depth: 38 mm



16511.16.6
C 16, $I_{\Delta n}$ 6 mA,
breaking capacity
3000 A - 2 modules.
Depth: 38 mm



16511.06.B
C 6, $I_{\Delta n}$ 10 mA,
breaking capacity
1500 A - 2 modules.
Depth: 38 mm



16511.10.B
C 10, $I_{\Delta n}$ 10 mA,
breaking capacity
3000 A - 2 modules.
Depth: 38 mm



16511.16.B
C 16, $I_{\Delta n}$ 10 mA,
breaking capacity
3000 A - 2 modules.
Depth: 38 mm



16511.16.6.B
C 16, $I_{\Delta n}$ 6 mA,
breaking capacity
3000 A - 2 modules.
Depth: 38 mm

Detectors (230 V~ 50/60 Hz or 12-24 V~ (SELV) / 12-24 Vdc)



16591
Gas Stop GPL, LPG detector,
solenoid valve control, 230 V~
- 3 modules.
Depth: 42,5 mm



16592
Gas Stop Metano, methane
detector, solenoid valve control,
230 V~ - 3 modules.
Depth: 42,5 mm



16591.B
Gas Stop GPL, LPG detector,
solenoid valve control, 230 V~
- 3 modules.
Depth: 42,5 mm



16592.B
Gas Stop Metano, methane
detector, solenoid valve control,
230 V~ - 3 modules.
Depth: 42,5 mm



Δ 16590
NO 3/4"
solenoid valve



01899
Gas Test, cylinder
for testing detectors

Presence detectors for burglar alarm system and accessories



16620
IR-detector,
12 Vdc (SELV).
Depth: 31,5 mm



16544
Adaptor for
electronic key
insertion.
Depth: 10,5 mm



Δ 16620.P
Tamperproof
protection for
16620



16620.B
IR-detector,
12 Vdc (SELV).
Depth: 31,5 mm



16544.B
Adaptor for
electronic key
insertion.
Depth: 10,5 mm

Electronic time delay switches (230 V~ 50/60 Hz)



16572
For controlling staircases and utility
rooms lighting, exhaust fans
- 2 modules.
Depth: 30,5 mm



16572.B
For controlling staircases and utility
rooms lighting, exhaust fans
- 2 modules.
Depth: 30,5 mm

Switches for fan-coil regulation



16558
Slide, 1P 6(2) A 250 V~,
4-position.
Depth: 27,5 mm



16558.B
Slide, 1P 6(2) A 250 V~,
4-position.
Depth: 27,5 mm

Grey

White

Electronic thermostats (230 V~ 50/60 Hz)



Δ 16580

Heating, fixed temperature reduction cycle
- 3 modules.
Depth: 39,5 mm



Δ 16581

Heating and air-conditioning, settable temperature reduction cycle - 3 modules.
Depth: 39,5 mm



Δ 16580.B

Heating, fixed temperature reduction cycle
- 3 modules.
Depth: 39,5 mm

Electronic thermostat kit



16991

Contains:

- 1 touch screen thermostat 02950, 5(2) A 230 V~ change-over relay contact, supply voltage 120-230 V~ 50/60 Hz;
- 1 blank module 19041;
- 1 3-module mounting frame 16723.

To complete with 3-module Idea cover plate

Electronic timer-thermostats



Δ 16575

Heating and air-conditioning, supply voltage 120-230 V~ 50/60 Hz - 3 modules.
Depth: 40 mm



Δ 16575.B

Heating and air-conditioning, supply voltage 120-230 V~ 50/60 Hz - 3 modules.
Depth: 40 mm



Δ 16576.B

Heating and air-conditioning, 1,5 V-battery - 3 modules.
Depth: 40 mm

Electronic timer-thermostat kit



16990

Contains:

- 1 timer-thermostat 19446, 5(2) A 250 V~ change-over relay output, AA LR6 1,5 V battery powered;
- 1 3-module mounting frame 16723.

To complete with 3-module Idea cover plate



16992

Contains:

- 1 touch screen timer-thermostat 02955, 5(2) A 230 V~ change-over relay contact, supply voltage 120-230 V~ 50/60 Hz;
- 1 3-module mounting frame 16723.

To complete with 3-module Idea cover plate

Clocks (120-230 V~ 50/60 Hz)



16582

Timer-switch, 1 relay output
- 3 modules.
Depth: 40 mm



Δ 16573

Electronic alarm clock
- 3 modules.
Depth: 40 mm



16582.B

Timer-switch, 1 relay output
- 3 modules.
Depth: 40 mm



Δ 16573.B

Electronic alarm clock
- 3 modules.
Depth: 40 mm

Grey

White

Bus access control system



16470
Transponder card
and key reader
- 2 modules.
Depth: 25 mm



16471
Smart card reader and
programmer - 3 modules.
Depth: 36 mm



16472
Actuator with 3 A 30 V
change-over relay output
- 2 modules.
Depth: 25 mm



16473
Smart card programmer
in table mounting box
- 3 modules



16470.B
Transponder card
and key reader
- 2 modules.
Depth: 25 mm



16471.B
Smart card reader and
programmer - 3 modules.
Depth: 36 mm



16472.B
Actuator with 3 A 30 V
change-over relay output
- 2 modules.
Depth: 25 mm



16473.B
Smart card programmer
in table mounting box
- 3 modules



01816
Transponder card
01816.H
As above, customizable



01815
Transponder key



16452
Programmable smart card
16452.H
As above, customizable



01400
Supply unit, 29 Vdc
400 mA output,
230 V~ 50/60 Hz,
2 x 17,5 mm modules



01401
Supply unit, 29 Vdc
1280 mA output,
120-230 V~ 50/60 Hz,
8 x 17,5 mm modules



Δ 01800
Supply unit, 29 Vdc
320 mA output,
120-230 V~ 50/60 Hz,
6 x 17,5 mm modules



16474
Smart card for serial
connection of reader/
programmer

Access control system



16461
Smart card reader/programmer,
12-24 V~ 50/60 Hz /12-24 Vdc
(SELV) - 3 modules.
Depth: 36 mm



16465
Electronic switch, vertical pocket,
230 V~ 50/60 Hz, 24 V~/
24 Vdc (SELV) - 3 modules.
Depth: 36,5 mm



16461.B
Smart card reader/programmer,
12-24 V~ 50/60 Hz /12-24 Vdc
(SELV) - 3 modules.
Depth: 36 mm



16465.B
Electronic switch, vertical pocket,
230 V~ 50/60 Hz, 24 V~/
24 Vdc (SELV) - 3 modules.
Depth: 36,5 mm



16452
Programmable smart card
16452.H
As above, customizable



16452.S
ISO-card (badge)

Systems - Admittance request system



16455
External electronic ringing
unit - 3 modules.
Depth: 23 mm



16456
Internal electronic reply unit,
12 V~ 50/60 Hz or 12 Vdc
- 3 modules.
Depth: 23 mm



16455.B
External electronic ringing
unit - 3 modules.
Depth: 23 mm



16456.B
Internal electronic reply unit,
12 V~ 50/60 Hz or 12 Vdc
- 3 modules.
Depth: 23 mm

Grey

White

By-alarm: burglar alarm system - System components



01700
Control panel, 230 V~ 50 Hz,
8 local inputs expandable to 24,
surface mounting

▲ **01700.DE**
As above,
in German language

01700.120
As above,
120 V~ 60 Hz



01703
Control panel, 230 V~ 50 Hz,
8 local inputs expandable to 64,
surface mounting

▲ **01703.DE**
As above,
in German language

01703.120
As above,
120 V~ 60 Hz



01705
LED keypad with display,
12 Vdc, surface mounting

▲ **01705.DE**
As above,
in German language



01715
Siren for outdoor use

01716
Dummy siren for
outdoor use



01717
Additional power supply unit,
230 V~ 50/60 Hz 1,5 A,
surface mounting

01717.120
As above, 120 V~



01707
GSM Dual Band
high-gain aerial



01706
GSM Dual Band GSM/GPRS 900/1800 MHz
transmitter/receiver module



01708
PSTN communicator
for control panel



01709
4-input expansion
module



01710
4-output expansion
module



01713.EN
Voice synthesis
module for control
panel, in English



01714
Tear-proof box for expansion
modules, surface mounting



01712
Interface for Ethernet network (LAN)
and By-me home automation system
(via Web server 01945, 01946), remote
and local supervision/control over IP



01725
Configuration cables
and interfaces



01711
Isolated interface
for Bus signal
regeneration

Grey

White

By-alarm: burglar alarm system - Devices



19478¹
Activator/
partialiser.
Depth:
40,7 mm



19479¹
IR and microwaves
presence detector
- 2 modules.
Depth: 26,2 mm



19496¹
Indoor siren - 3 modules.
Depth: 36,5 mm



19478.B¹
Activator/
partialiser.
Depth:
40,7 mm



19479.B¹
IR and microwaves
presence detector
- 2 modules.
Depth: 26,2 mm



19496.B¹
Indoor siren - 3 modules.
Depth: 36,5 mm

¹ To be installed with dedicated 16723 mounting frame.

¹ To be installed with dedicated 16723.B mounting frame.



▲01718.G
Transponder key,
green



▲01718.Y
Transponder key,
yellow



▲ 01718
Transponder key



01720
Passive infrared
and microwave dual
technology detector,
PET immune, surface
mounting



01721
Passive infrared and
microwave dual tech-
nology detector, anti-
masking and anti-crawl,
surface mounting



01723
Dual technology
curtain detector,
IP54 for outdoor use
for entrances and
windows, surface
mounting



01820
Flush mounting
magnetic contact



01722
Dual technology curtain
detector, for entrances
and windows, surface
mounting



01724
Water detector for
protection against
flooding, floor
mounting



01821
Metal flush mounting
magnetic contact



01822
Visible surface
magnetic contact



01823
Magnetic contact in
metal enclosure for
visual installation



01825
Electromechanical
cordoperated contact
for rolling shutters
protection



01826
Electromechanical inertial
contact for windows and
doors protection

By-alarm: burglar alarm system - Radiofrequency devices



01727
Detector with magnetic
contact for doors and
windows



01728
Infrared detector



01729
Two-way 868 MHz radiofrequency
interface



01730
Two-way 868 MHz
radio frequency
remote control

By-alarm: burglar alarm system - Cables



01732
By-alarm system cable,
halogen-free 2x0,22 mm²,
suitable for I category
cables (U0 = 400 V),
white - 100 m



01733
By-alarm system cable,
halogen-free 2x0,50 mm²,
suitable for I category
cables (U0 = 400 V),
white - 100 m



01734
By-alarm system cable,
halogen-free 2x0,50 mm²
+ 4x0,22 mm², suitable for I
category cables (U0 = 400 V),
white - 100 m



01735
By-alarm system cable,
halogen-free 2x0,50 mm²
+ 6x0,22 mm², suitable for I
category cables (U0 = 400 V),
white - 100 m

Home automation

Grey

White

By-me: supervising - Touch screens



Δ 16952
Monochrome touch screen for local control - 3 modules.
Depth: 36,8 mm



Δ 16952.B
Monochrome touch screen for local control - 3 modules.
Depth: 36,8 mm

By-me: supervising - Devices for DIN rail (60715 TH35) installation



01942
GSM phone dial, for direct connection to Bus 12-24 V~ 50/60 Hz or 12-30 Vdc (SELV), 6 x 17,5 mm modules



01945
Web server for local and remote control of the By-me system via IP, 8 x 17,5 mm modules



01946
Web server Light for local and remote control of the By-me system via IP, manages up to 64 devices, 8 x 17,5 mm modules

By-me: system components - Control units



21509
For control and configuration, touch display, temperature sensor input, with V51923 frame for DIN (60715 TH35) rail installation - 3 modules.
Supplied with RJ45 socket connector and V51921 frame.
Depth: 37 mm



21509.B
For control and configuration, touch display, temperature sensor input, with V51923 frame for DIN (60715 TH35) rail installation - 3 modules.
Supplied with RJ45 socket connector and V51921 frame.
Depth: 37 mm



V51921

V51923

1-module and 3-module frame for DIN rail (60715 TH35) and nib for touch screen

By-me: system components - Software and interfaces



01993
Hardware interface for programming By-me serial devices and Well-contact Plus touch screens and for configuring By-me systems

By-me: system components - Devices for DIN rail (60715 TH35) installation



01468
Logic unit for logic, mathematical, timing and messaging functions, 1 x 17,5 mm modules



01400
Supply unit, 29 Vdc 400 mA output, 230 V~ 50/60 Hz, 2 x 17,5 mm modules



01401
Supply unit, 29 Vdc 1280 mA output, 120-230 V~ 50/60 Hz, 8 x 17,5 mm modules



01830
Supply unit 12 Vdc output, 120-230 V~ 50/60 Hz, 4 x 17,5 mm modules



▲ 01845.1
Line coupler, 2 x 17,5 mm modules



Δ 01845
Line coupler, 3 x 17,5 mm modules

By-me: system components - Special Bus RJ11 jacks



16339
Special jack for Bus, screw terminals.
Depth: 33,2 mm



16339.B
Special jack for Bus, screw terminals.
Depth: 33,2 mm

Home automation

Grey

White

By-me: system components - Accessories and cables



01840

Bus system cable, halogen-free
2x0,50 mm², rated operating
voltage to earth 300/500 V,
suitable for I category cables,
white - 100 m



01841

Bus system cable,
halogen-free
2x0,50 mm² - 100 m



01839

Removable 2 screw
terminals, for Bus
system

By-me: temperature control



02951

Touch screen thermostat, ON/OFF, PWM and PID
control, for 2- and 4-pipe systems, 3-speed/proportional
fan coil control, 1 input for NTC sensor - 2 modules.
To be installed with dedicated 16723 mounting frame.
Depth: 38,5 mm



02951.B

Touch screen thermostat, ON/OFF, PWM and PID
control, for 2- and 4-pipe systems, 3-speed/proportional
fan coil control, 1 input for NTC sensor - 2 modules.
To be installed with dedicated 16723 mounting frame.
Depth: 38,5 mm



16953

Thermostat with
display, for fan-coil
- 2 modules.
Depth: 26 mm



16954

Thermostat with
display - 2 modules.
Depth: 24,5 mm



16953.B

Thermostat with
display, for fan-coil
- 2 modules.
Depth: 26 mm



16954.B

Thermostat with
display - 2 modules.
Depth: 24,5 mm

By-me: automation - Devices



16960

2 simple push
buttons - 2 modules.
Depth: 24,5 mm



16965

2 simple push buttons
+ 8 A 120-230 V~
change-over relay
output actuator
- 2 modules.
Depth: 36,5 mm



16961

2 rocker push
buttons
- 2 modules.
Depth: 24,5 mm



16966

2 rocker push buttons
+ 8 A 120-230 V~
change-over relay
output actuator
- 2 modules.
Depth: 36,5 mm




16960.B

2 simple push
buttons - 2 modules.
Depth: 24,5 mm




16965.B

2 simple push buttons
+ 8 A 120-230 V~
change-over relay
output actuator
- 2 modules.
Depth: 36,5 mm



16961.B

2 rocker push
buttons
- 2 modules.
Depth: 24,5 mm



16966.B

2 rocker push buttons
+ 8 A 120-230 V~
change-over relay
output actuator
- 2 modules.
Depth: 36,5 mm



16967

2 rocker push
buttons + cosφ 0,6
2 A 120-230 V~
actuator for rolling
shutter - 2 modules.
Depth: 35 mm



16967.1

2 rocker push buttons
+ actuator 1 roller
shutter laths position-
ing, cosφ 0,6 2 A 120-
230 V~ - 2 modules.
Depth: 36,5 mm




Δ 16969

2 rocker push buttons
+ SLAVE-dimmer
actuator - 2 modules
Δ 16969.120
As above, 120 V~.
Depth: 36,5 mm




16967.B

2 rocker push
buttons + cosφ 0,6
2 A 120-230 V~
actuator for rolling
shutter - 2 modules.
Depth: 35 mm



16967.1.B

2 rocker push buttons
+ actuator 1 roller
shutter laths position-
ing, cosφ 0,6 2 A 120-
230 V~ - 2 modules.
Depth: 36,5 mm



Δ 16969.B

2 rocker push buttons
+ SLAVE-dimmer
actuator - 2 modules
Δ 16969.120.B
As above, 120 V~.
Depth: 36,5 mm



16980

3 simple push buttons
- 3 modules.
Depth: 36,5 mm



16985

3 simple push buttons +
8 A 120-230 V~ change-
over relay output actuator
- 3 modules.
Depth: 36,5 mm



16981

3 rocker push buttons
- 3 modules.
Depth: 36,5 mm



16980.B

3 simple push buttons
- 3 modules.
Depth: 36,5 mm



16985.B

3 simple push buttons +
8 A 120-230 V~ change-
over relay output actuator
- 3 modules.
Depth: 36,5 mm



16981.B

3 rocker push buttons
- 3 modules.
Depth: 36,5 mm

Home automation

Grey

White

By-me: automation - Devices



16986

3 rocker push buttons + 8 A 120-230 V~ change-over relay output actuator - 3 modules.
Depth: 36,5 mm




16987

3 rocker push buttons + 4 A 120-230 V~ actuator for 1 rolling shutter - 3 modules.
Depth: 35 mm



Δ 16989

3 rocker push buttons + 40-300 W / 40-200 VA MASTER dimmer actuator - 3 modules.
Depth: 36,5 mm



16986.B

3 rocker push buttons + 8 A 120-230 V~ change-over relay output actuator - 3 modules.
Depth: 36,5 mm



16987.B

3 rocker push buttons + 4 A 120-230 V~ actuator for 1 rolling shutter - 3 modules.
Depth: 35 mm



Δ 16989.B

3 rocker push buttons + 40-300 W / 40-200 VA MASTER dimmer actuator - 3 modules.
Depth: 36,5 mm

By-me: automation - 1-module interchangeable buttons



16971

No symbol, for simple/rocker push buttons



16971.10

General symbol, for simple push buttons



16971.20

ON/OFF symbols, for rocker push buttons



16971.21

Arrows symbol, for rocker push buttons



Δ 16971.22

Regulation symbol, for rocker push buttons



16971.25

Universal regulation symbols, for rocker push buttons



16971.1T

1 name-plate, for simple push buttons



16971.2T

2 name-plates, for rocker push buttons



16971.B

No symbol, for simple/rocker push buttons



16971.10.B

General symbol, for simple push buttons



16971.20.B

ON/OFF symbols, for rocker push buttons



16971.21.B

Arrows symbol, for rocker push buttons



Δ 16971.22.B

Regulation symbol, for rocker push buttons



16971.25.B

Universal regulation symbols, for rocker push buttons



16971.1T.B


1 name-plate, for simple push buttons



16971.2T.B

2 name-plates, for rocker push buttons

By-me: automation - 2-module interchangeable buttons



16972

No symbol, for simple/rocker push buttons



16972.10

General symbol, for simple push buttons



16972.20

ON/OFF symbols, for rocker push buttons



16972.21

Arrows symbol, for rocker push buttons



16972.25

Universal regulation symbols, for rocker push buttons



16972.1T

1 name-plate, for simple push buttons



16972.B

No symbol, for simple/rocker push buttons



16972.10.B

General symbol, for simple push buttons



16972.20.B

ON/OFF symbols, for rocker push buttons



16972.21.B

Arrows symbol, for rocker push buttons



16972.25.B

Universal regulation symbols, for rocker push buttons



16972.1T.B

1 name-plate, for simple push buttons

By-me: automation - Interfaces



01475

3 programmable digital inputs module for contacts without potential, 3 LED control outputs, By-me home automation, for flush mounting (backside)



01476

2 programmable digital inputs module for contacts without potential, 1 relay output for roller blind laths positioning, relay for cosφ 0.6 2 A 120-230 V~ motor, 2 LED control outputs, By-me home automation, for flush mounting (backside)



01477

2 programmable digital inputs module for contacts without potential, 1 NO 10 A 120-230 V~ 50/60 Hz light control relay output, 2 LED control outputs, By-me home automation, for flush mounting (backside)

Grey

White

By-me: automation - Devices for DIN rail (60715 TH35) installation



01470
Pre-program 9-input and 8-output module, NO 16 A 120-230 V~ 50/60 Hz relay outputs, light control, roller blind laths positioning and local control functions, 6 x 17,5 mm modules



01471
4 16 A 120-230 V~ change-over relay outputs actuator, programmable for light control, roller blind laths positioning, fan-coil and local control, 4 x 17,5 mm modules



01850.2
Actuator with 16 A 120-230 V~ change-over relay output + push button for manual operating, 2 x 17,5 mm modules



Δ 01852.2
Actuator for 2 roller blinds with lath positioning, 16 A 120-230 V~ change-over relay output, push buttons for manual operating, 4 x 17,5 mm modules



01856
Actuator 0-10 Vdc for ballast control, 120-230 V~ changeover relay output, 3 x 17,5 mm modules



Δ 01853.120
MASTER dimmer, 40-500 W/VA, 40-300 VA, 120 V~, 3 x 17,5 mm modules



Δ 01854.120
SLAVE dimmer, 40-500 W/VA, 40-300 VA, 120 V~, 3 x 17,5 mm modules



Δ 01857.120
MASTER dimmer, 40-400 VA, 120 V~, 4 x 17,5 mm modules



Δ 01858.120
SLAVE dimmer, 40-400 VA, 120 V~, 4 x 17,5 mm modules



***01861**
MASTER dimmer, 40-1000 W/VA, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules



Δ*01862
SLAVE dimmer, 40-1000 W/VA, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules



01863
MASTER dimmer, 40-800 W/VA 50 Hz, 40-700 W/VA 60 Hz, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules



Δ 01864
SLAVE dimmer, 40-800 W/VA 50 Hz, 40-700 W/VA 60 Hz, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules



***01865**
MASTER dimmer, 40-700 VA, 230 V~ 50/60 Hz, MOSFET, 4 x 17,5 mm modules



Δ*01866
SLAVE dimmer, 40-700 VA, 230 V~ 50/60 Hz, MOSFET, 4 x 17,5 mm modules



01867
MASTER dimmer, 40-500 VA 50 Hz, 40-400 VA 60 Hz, 230 V~, MOSFET, 4 x 17,5 mm modules



Δ 01868
SLAVE dimmer, 40-500 VA 50 Hz, 40-400 VA 60 Hz, 230 V~, MOSFET, 4 x 17,5 mm modules



01870
MASTER dimmer, 40-500 W, 40-300 VA, CFL 10-200 W, LED 3-200 W, 230 V~, 4 x 17,5 mm modules

01870.120
As above, 120 V~



01871
SLAVE dimmer, 40-500 W, 40-300 VA, CFL 10-200 W, LED 3-200 W, 230 V~, 4 x 17,5 mm modules

01871.120
As above, 120 V~



01975
Actuator with 1-10 Vdc 30 mA output for LED control, 120-230 V~ 2,5 A change-over relay output, 120-230 V~ 50/60 Hz, 3 x 17,5 mm modules



01976
Actuator with 1-10 Vdc 30 mA output for LED control, 12-24 V 10 A relay output, 12-24 V~ 50/60 Hz or 12-24 Vdc, 3 x 17,5 mm modules



01466
Actuator with 4 (0)4-20 mA or 0-10 V proportional analogue outputs with max scalable voltage output, 120-230 V~ 50/60 Hz, 4 x 17,5 mm modules



01467
Device with 3 analogue signal inputs, 1 0-10 V or 4-20 mA input, 1 NTC sensor input, 1 brightness sensor 01530 input, 2 x 17,5 mm modules

By-me: automation - Electronic supply units



01874
230 V~ 50 Hz, for controllable LED lamps, 12-24 Vdc

01874.120
As above, 120 V~



01875
230 V~ 50 Hz, for controllable LED lamps, 350/500/700 mA

01875.120
As above, 120 V~

By-me: automation - Electronic transformers



Δ 01860.60
20-60 W, 12 V~ (SELV) output, 230-240 V~ 50/60 Hz



01860.105
20-105 W, 12 V~ (SELV) output, 230-240 V~ 50/60 Hz

Home automation • Accessories

Grey

White

By-me: automation - Devices



16955
Interface for traditional switches 230 V~/12-24 Vac/dc
- 2 modules.
Depth: 36,5 mm



16958
Interface for traditional switches.
Depth: 39,5 mm



16956
Remote control receiver
- 2 modules.
Depth: 24,5 mm



16955.B
Interface for traditional switches 230 V~/12-24 Vac/dc
- 2 modules.
Depth: 36,5 mm



16958.B
Interface for traditional switches.
Depth: 39,5 mm



16956.B
Remote control receiver
- 2 modules.
Depth: 24,5 mm



01849
IR-remote control,
14-channel



16935
IR presence detector
- 2 modules.
Depth: 26 mm



Δ 16937
IR and microwaves presence detector
- 2 modules.
Depth: 26 mm



16974
Actuator 6 A
120-230 V~ change-over relay output.
Depth: 39,5 mm



16975
Actuator, 16 A
120-230 V~ change-over relay output
- 2 modules.
Depth: 36,5 mm



16935.B
IR presence detector
- 2 modules.
Depth: 26 mm



Δ 16937.B
IR and microwaves presence detector
- 2 modules.
Depth: 26 mm



16974.B
Actuator 6 A
120-230 V~ change-over relay output.
Depth: 39,5 mm



16975.B
Actuator, 16 A
120-230 V~ change-over relay output
- 2 modules.
Depth: 36,5 mm



16836
Orientable support
- 2 modules



16831
Frame for orientable support
surface mounting



16830
Adaptor for orientable support flush mounting



16836.B
Orientable support
- 2 modules



16831.B
Frame for orientable support
surface mounting

LED signalling units



00935.A: 12-24 V~ 0,1 W, amber
00935.G: 12-24 V~ 0,1 W, green
00935.R: 12-24 V~ 0,1 W, red
00935.B: 12-24 V~ 0,1 W, blue
00935.W: 12-24 V~ 0,1 W, white

▲ 00936.250.A: 250 V~ 50/60 Hz 0,35 W, amber
▲ 00936.250.G: 250 V~ 50/60 Hz 0,35 W, green
▲ 00936.250.R: 250 V~ 50/60 Hz 0,35 W, red
▲ 00936.250.B: 250 V~ 50/60 Hz 0,35 W, blue
▲ 00936.250.W: 250 V~ 50/60 Hz 0,35 W, white

▲ 00936.120.A: 120 V~ 50/60 Hz 0,2 W, amber
▲ 00936.120.G: 120 V~ 50/60 Hz 0,2 W, green
▲ 00936.120.R: 120 V~ 50/60 Hz 0,2 W, red
▲ 00936.120.B: 120 V~ 50/60 Hz 0,2 W, blue
▲ 00936.120.W: 120 V~ 50/60 Hz 0,2 W, white

Δ 00936.A: 110-250 V~ 0,5 W, amber
Δ 00936.G: 110-250 V~ 0,5 W, green
Δ 00936.R: 110-250 V~ 0,5 W, red
Δ 00936.B: 110-250 V~ 0,5 W, blue
Δ 00936.W: 110-250 V~ 0,5 W, white

Incandescent microtube lamps



07054
ø7x31 mm, 12 V 3 W, white¹
07055
ø7x31 mm, 24 V 3 W, white¹

ø 6,3x28 mm microtube lamps



07052
Neon 250 V~ 0,5 W, red¹

ø 5x20 mm 250 V~ fuses



steatite tube, breaking capacity 1500 A:
Δ 07051.HF.16: FF16AH, ø 6,3x32 mm

E10 10x28 mm lamps



Neon:
Δ 14778
110 V~ 0,5 W, red¹
14779
230 V~ 0,5 W, red¹



Incandescent:
Δ 14770
12 V~ 3 W, white¹
14771
24 V~ 3 W, white¹
Δ 14774
12 V~ 0,6 W, white¹
Δ 14775
24 V~ 1,2 W, white¹
Δ 14776
130 V~ 2,6 W, white¹
14777
230 V~ 3 W, white¹

Building automation: Well-contact Plus

Grey

White

Supervising - Control



Δ 16849
Monochrome touch screen,
for the room control
- 3 modules.
Depth: 36,8 mm



Δ 16849.B
Monochrome touch screen,
for the room control
- 3 modules.
Depth: 36,8 mm

Supervising - Devices for DIN rail (60715 TH35) installation




01545
Web server for local and remote
control of the KNX system

Automation - Control device



16840
Control device with
four independent push
buttons, KNX standard,
visible in darkness,
to be completed with
half-buttons.
Depth: 20 mm



16840.B
Control device with
four independent push
buttons, KNX standard,
visible in darkness,
to be completed with
half-buttons.
Depth: 20 mm

Automation - 1-module interchangeable half-buttons



16841
Four half-buttons
without symbol




16841.0
Four half-buttons,
O symbol




16841.1
Four half-buttons,
I symbol



16841.2
Four half-buttons,
I O symbol



16841.B
Four half-buttons
without symbol



16841.0.B
Four half-buttons,
O symbol



16841.1.B
Four half-buttons,
I symbol



16841.2.B
Four half-buttons,
I O symbol



16841.3
Four half-buttons,
directional arrows
symbol



16841.4
Four half-buttons,
regulation symbol




16843
Four fixed half-buttons,
without symbol



16841.3.B
Four half-buttons,
directional arrows
symbol



16841.4.B
Four half-buttons,
regulation symbol



16843.B
Four fixed half-buttons,
without symbol

Grey

White

Automation - 2-module interchangeable half-buttons



16842
Two half-buttons
without symbol



16842.0
Two half-buttons,
O symbol



16842.1
Two half-buttons,
I symbol



16842.2
Two half-buttons,
I O symbol



16842.B
Two half-buttons
without symbol



16842.0.B
Two half-buttons,
O symbol



16842.1.B
Two half-buttons,
I symbol



16842.2.B
Two half-buttons,
I O symbol



16842.3
Two half-buttons,
directional arrows
symbol



16842.4
Two half-buttons,
regulation symbol




16844
Two fixed half-buttons,
without symbol



16842.3.B
Two half-buttons,
directional arrows
symbol



16842.4.B
Two half-buttons,
regulation symbol



16844.B
Two fixed half-buttons,
without symbol

Automation - Control



16850
Passive infrared
presence detector,
KNX standard
- 2 modules.
Depth: 26 mm



16836
Orientable
support
- 2 modules



16831
Frame for
orientable support
surface mounting



16830
Adaptor for
orientable
support flush
mounting



16850.B
Passive infrared
presence detector,
KNX standard
- 2 modules.
Depth: 26 mm



16836.B
Orientable
support
- 2 modules



16831.B
Frame for
orientable support
surface mounting

Access control - Devices



16927
Transponder card reader for
installation outside rooms, KNX
standard, 2 NO 4 A 24 V~
relay outputs, 2 inputs, power
supply 12-24 V~ 50/60 Hz
and 12-24 Vdc (SELV)
- 3 modules.
Supplied without transponder card.
Depth: 36,5 mm



16923
Transponder card reader with
vertical pocket for installation
inside rooms, KNX standard,
2 NO 4 A 24 V~ relay outputs,
2 inputs, supplementary power
supply 12-24 V~ 50/60 Hz and
12-24 Vdc (SELV)
- 3 modules.
Depth: 36,5 mm



16927.B
Transponder card reader for
installation outside rooms, KNX
standard, 2 NO 4 A 24 V~
relay outputs, 2 inputs, power
supply 12-24 V~ 50/60 Hz
and 12-24 Vdc (SELV)
- 3 modules.
Supplied without transponder card.
Depth: 36,5 mm



16923.B
Transponder card reader with
vertical pocket for installation
inside rooms, KNX standard,
2 NO 4 A 24 V~ relay outputs,
2 inputs, supplementary power
supply 12-24 V~ 50/60 Hz and
12-24 Vdc (SELV)
- 3 modules.
Depth: 36,5 mm



16920
Transponder card reader/programmer,
in 3-module table mounting box



16920.B
Transponder card reader/programmer,
in 3-module table mounting box



01598
Programmable and customizable
transponder card



01835.H
Programmable and customizable
transponder card

Building automation: Well-contact Plus

Grey

White

Temperature control



02952
Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor input + 1 programmable digital input - 2 modules. To be installed with dedicated 16723 mounting frame. Depth: 38,5 mm



16915
Thermostat for ambient temperature control of 2 independent zones (heating and air-conditioning), KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor input + 1 programmable input - 2 modules. Depth: 36,5 mm



02952.B
Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor input + 1 programmable digital input - 2 modules. To be installed with dedicated 16723.B mounting frame. Depth: 38,5 mm



16915.B
Thermostat for ambient temperature control of 2 independent zones (heating and air-conditioning), KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor input + 1 programmable input - 2 modules. Depth: 36,5 mm

Temperature control - Linear temperature sensor



02965.1
Wired temperature sensor, NTC 10 kΩ, cable length 3 m

Temperature control - Weather station



01546
Weather station, KNX standard, power supply 12-32 Vdc or 12-24 Vac

Brightness and presence sensors



▲01527
IR presence detector, 360° motion range, ON/OFF and adjustment of lighting, heating, air conditioning, ventilation, 1-1000 Lux adjustable brightness range, KNX standard, for ceiling installation. Dimensions: 80x80x45 mm



▲01527.S
Adapter for 01527 detector ceiling installation



▲01529.1
IR presence detector, 360° motion range, for ON/OFF lighting, 1-1000 Lux adjustable brightness range, KNX standard, for ceiling installation. Dimensions: 91x91x45 mm



▲01529.1.S
Adapter for 01529.1 detector ceiling installation



▲01529
IR presence detector, 360° motion range, for lightings depending on the brightness, 0-1000 Lux adjustable brightness range, KNX standard, for ceiling installation



▲01529.S
Adapter for 01529 detector ceiling installation



01530
Light sensor for dimmer 01528, KNX standard, ceiling installation

Building automation: Well-contact Plus

Devices for DIN rail (60715 TH35) installation



01510
4-channel digital input device, programmable for NO, NC and 120-230 V~ contacts, KNX standard, 2 x 17,5 mm modules



01522
Input/output device, 4 NO 16 A 250 V~ relay outputs, 4 inputs for NO contacts, KNX standard, 4 x 17,5 mm modules



01523
Actuator with 4 NO 16 A 250 V~ relay outputs, KNX standard, 4 x 17,5 mm modules



01521
Actuator with 12 10 A 250 V~ 50/60 Hz relay outputs for fluorescent lamps, KNX standard, 12 x 17,5 mm modules



01524
Actuator for 2 roller shutters, 16 A 250 V~ relay outputs, KNX standard, 4 x 17,5 mm modules



01525
Actuator for 8 roller shutters, 6 A 230 V~ 50/60 Hz relay outputs, KNX standard, 8 x 17,5 mm modules



01535
Solenoid valve actuator, 6 230 V~ 0,5 A outputs, local control buttons, KNX standard, 4x17,5 mm modules



01536
Actuator, 4 0-10 V or (0)4-20 mA analog outputs, KNX standard, 4x17,5 mm modules



01526
Dimmer 230 V~ 50/60 Hz for 2x300 W incandescent lamps, 2x300 VA ferromagnetic transformers, 2x300 VA electronic transformers, KNX standard, 4 x 17,5 mm modules



01528
Dimmer, 2 inputs for 01530, 2 NO 16 A 250 V~ relay outputs, 2 1-10 V outputs, KNX standard, 4 x 17,5 mm modules



01547.1
IP interface, KNX, 2 x 17,5 mm modules



01547
IP interface, KNX, 2 x 17,5 mm modules



01544
KNX DALI gateway, 8-channel for 16 lamps per channel, 6 x 17,5 mm modules



01540
USB interface, KNX B-type, 2 x 17,5 mm modules



01500.2
Power supply with Bus 30 Vdc 320 mA output, supply voltage 120-240 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



01500.1
Power supply with Bus 30 Vdc 320 mA output, supply voltage 85-265 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



01501.2
Power supply with Bus 30 Vdc 640 mA output, 30 Vdc auxiliary output, supply voltage 120-240 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



01501.1
Power supply with Bus 30 Vdc 640 mA output, 30 Vdc auxiliary output, supply voltage 230 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



01504.2
Line coupler, KNX standard, 2 x 17,5 mm modules



01504.1
Line coupler, KNX standard, 2 x 17,5 mm modules



16887
Safety transformer, 230/12-24 V~ (SELV), 24 VA, 3 x 17,5 mm modules



01514
Interface with 2 input or output programmable channels for LEDs, KNX standard



01515
Interface with 4 input or output programmable channels for LEDs, KNX standard

Software and interface



Software for Well-contact Plus system management

01589: Well-contact Suite Light

01590: Well-contact Suite Basic

01591: Well-contact Suite Top

01592: Well-contact Suite Client

01593: Well-contact Suite Office

01594: Well-contact Suite Client Office

01595

Additional software for interfacing with existing management system



01597

USB spare key for Well-contact Suite software



01993

Hardware interface for By-me and Well-contact Plus touch screens + By-me system programming by Bus with RJ11 socket. It is necessary EasyTool Professional and touch screen configuration software

KNX cable



01890


2x2x0,8 mm cable, KNX standard

Reduced module devices



Grey

White

1-way switches 250 V~

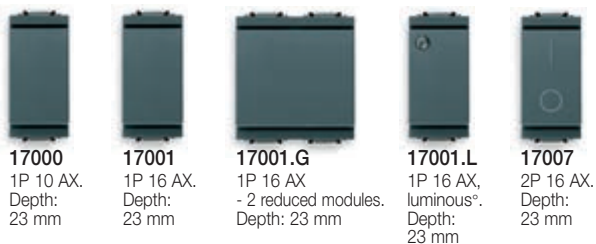


1P 2-way switches 250 V~

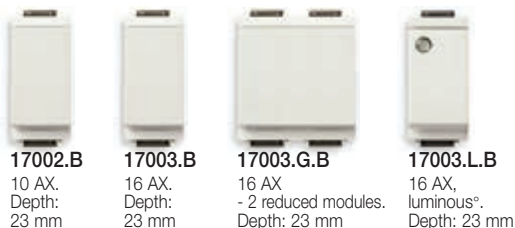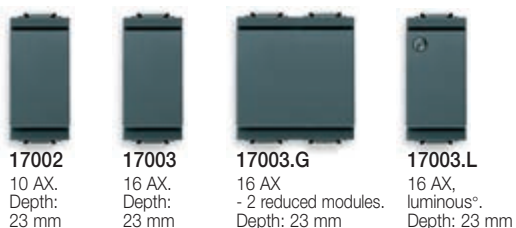

1P reversing switches 250 V~



1P NO push buttons 250 V~

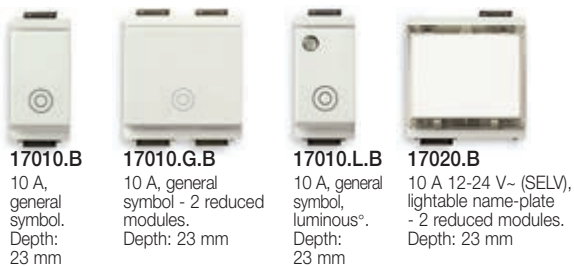

SICURY 2P+E Italian standard socket outlets 250 V~



17039.R
16 A P30, for dedicated supply lines, red - 2 reduced modules.
Depth: 29,5 mm

Reduced module devices

Grey

White

Socket outlets 250 V~ - German standard



17038
SICURY 2P+E 16 A,
German - 2 reduced
modules.
Depth: 29,5 mm



17038.B
SICURY 2P+E 16 A,
German - 2 reduced
modules.
Depth: 29,5 mm

Socket outlets 250 V~ - French standard



17042
SICURY 2P+E 16 A,
French - 2 reduced
modules.
Depth: 26,5 mm



17042.B
SICURY 2P+E 16 A,
French - 2 reduced
modules.
Depth: 26,5 mm

Socket outlets 250 V~ - Euro-American standard



17044
2P 15 A
Euro-American
ø 4,8 mm.
Depth: 28,5 mm



17044.B
2P 15 A
Euro-American
ø 4,8 mm.
Depth: 28,5 mm

Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)



17066.01
Single
connection
1 dB.
Depth:
26 mm



17066.10
Through-line
10 dB.
Depth:
26 mm



17066.01.B
Single
connection
1 dB.
Depth:
26 mm



17066.10.B
Through-line
10 dB.
Depth:
26 mm

Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (2 outputs: male and F-type female)



17067.01
Single-connection
1 dB - 2 reduced
modules.
Depth: 22,1 mm



17067.10
Through-line 10 dB
- 2 reduced modules.
Depth: 22,1 mm



17067.01.B
Single-connection
1 dB - 2 reduced
modules.
Depth: 22,1 mm



17067.10.B
Through-line 10 dB
- 2 reduced modules.
Depth: 22,1 mm

IDEA

Classica cover plates



Die-cast metal



01 White



Δ 05 Amaranth



Δ 07 Forest green



Δ 08 Sage green



10 Ivory



Δ 25 Metallized bordeaux



Δ 26 Metallized powder blue



Δ 27 Iridescent champagne



Δ 28 Iridescent euro blue



Δ 29 Iridescent petroleum



46 Slate grey

Natural wood



51 Maple



Δ 53 Cherry



55 Walnut



56 Wengé



Δ 57 Teak

Technopolymer



01 Bright white



Δ 02 Granite white



04 Idea white



Δ 07 Ruby red



Δ 10 Sapphire blue

Silk



Δ 01 White



Δ 02 Granite white



04 Idea white



Δ 07 Red



Δ 10 Blue

Note: Changes in the grain, colour or evenness of the surface of cover plates made of natural wood are a prized feature and a guarantee of the material's authenticity.



11 Black



Δ 12 Cobalt blue




21 Metallized silver



22 Metallized bronze



23 Metallized anthracite



24 Metallized titanium



31 Black chrome



32 Polished gold



33 Matt gold



34 Brushed nickel



36 Chrome



37 Antique brass



Δ 58 Mahogany



Δ 13 Emerald green



15 Graphite grey



16 Black



Δ 13 Green



15 Graphite



16 Black

IDEA

Rondò cover plates



Die-cast metal



01 White



Δ 05 Amaranth



Δ 07 Forest green



Δ 08 Sage green



10 Ivory



Δ 25 Metallized bordeaux



Δ 26 Metallized powder blue



Δ 27 Iridescent champagne



Δ 28 Iridescent euro blue



Δ 29 Iridescent petroleum




46 Slate grey

Natural wood



Δ 51 Maple



53 Cherry



55 Walnut



Δ 56 Wengé



57 Teak

Technopolymer



01 Bright white



Δ 02 Granite white



04 Idea white



Δ 07 Ruby red



Δ 10 Sapphire blue

Silk



Δ 01 White



Δ 02 Granite white



04 Idea white



Δ 07 Red



Δ 10 Blue

Note: Changes in the grain, colour or evenness of the surface of cover plates made of natural wood are a prized feature and a guarantee of the material's authenticity.



11 Black



Δ 12 Cobalt blue



21 Metallized silver



22 Metallized bronze



23 Metallized anthracite



Δ 24 Metallized titanium



31 Black chrome



32 Polished gold



33 Matt gold



34 Brushed nickel



36 Chrome



37 Antique brass



Δ 58 Mahogany



Δ 13 Emerald green



15 Graphite grey



16 Black





Δ 13 Green




15 Graphite



16 Black



		1- or 2-reduced module		3-module		4-module		5-module	
									
		Classica	Rondò	Classica	Rondò	Classica	Rondò	Classica	Rondò
Metal									
	White	17092.01	17093.01	16733.01	16753.01	16734.01	16754.01	-	-
	Amaranth	Δ 17092.05	Δ 17093.05	Δ 16733.05	Δ 16753.05	Δ 16734.05	Δ 16754.05	-	-
	Forest green	Δ 17092.07	Δ 17093.07	-	Δ 16753.07	Δ 16734.07	Δ 16754.07	-	-
	Sage green	-	Δ 17093.08	Δ 16733.08	Δ 16753.08	Δ 16734.08	Δ 16754.08	-	-
	Ivory	17092.10	17093.10	16733.10	16753.10	16734.10	16754.10	-	-
	Black	17092.11	17093.11	16733.11	16753.11	16734.11	16754.11	-	-
	Cobalt blue	Δ 17092.12	Δ 17093.12	Δ 16733.12	Δ 16753.12	Δ 16734.12	Δ 16754.12	-	-
	Metallized silver	17092.21	17093.21	16733.21	16753.21	16734.21	16754.21	-	-
	Metallized bronze	17092.22	17093.22	16733.22	16753.22	16734.22	16754.22	-	-
	Metallized anthracite	17092.23	17093.23	16733.23	16753.23	16734.23	16754.23	-	-
	Metallized titanium	17092.24	-	16733.24	-	16734.24	Δ 16754.24	-	-
	Metallized bordeaux	Δ 17092.25	Δ 17093.25	Δ 16733.25	Δ 16753.25	Δ 16734.25	Δ 16754.25	-	-
	Metallized powder blue	Δ 17092.26	Δ 17093.26	Δ 16733.26	Δ 16753.26	Δ 16734.26	Δ 16754.26	-	-
	Iridescent champagne	Δ 17092.27	Δ 17093.27	Δ 16733.27	Δ 16753.27	Δ 16734.27	Δ 16754.27	-	-
	Iridescent euro blue	Δ 17092.28	Δ 17093.28	Δ 16733.28	Δ 16753.28	Δ 16734.28	Δ 16754.28	-	-
	Iridescent petroleum	Δ 17092.29	Δ 17093.29	Δ 16733.29	Δ 16753.29	Δ 16734.29	Δ 16754.29	-	-
	Black chrome	17092.31	17093.31	16733.31	16753.31	16734.31	16754.31	-	-
	Polished gold	17092.32	17093.32	16733.32	16753.32	16734.32	16754.32	-	-
	Matt gold	17092.33	17093.33	16733.33	16753.33	16734.33	16754.33	-	-
	Brushed nickel	17092.34	17093.34	16733.34	16753.34	16734.34	16754.34	-	-
	Chrome	17092.36	17093.36	16733.36	16753.36	16734.36	16754.36	-	-
	Antique brass	17092.37	17093.37	16733.37	16753.37	16734.37	16754.37	-	-
	Slate grey	17092.46	17093.46	16733.46	16753.46	16734.46	16754.46	-	-
Natural wood									
	Maple	17092.51	-	16733.51	Δ 16753.51	16734.51	-	-	-
	Cherry	Δ 17092.53	17093.53	Δ 16733.53	16753.53	Δ 16734.53	16754.53	-	-
	Walnut	17092.55	17093.55	16733.55	16753.55	16734.55	16754.55	-	-
	Wengé	17092.56	Δ 17093.56	16733.56	Δ 16753.56	16734.56	Δ 16754.56	-	-
	Teak	Δ 17092.57	17093.57	Δ 16733.57	16753.57	Δ 16734.57	16754.57	-	-
	Mahogany	Δ 17092.58	Δ 17093.58	Δ 16733.58	-	Δ 16734.58	Δ 16754.58	-	-

Cover plates guideline

6-module		12-module	18-module	Panel mounting 1-module		Panel mounting 2-module	
							
Classica	Rondò	Classica	Classica	Classica	Rondò	Classica	Rondò
16736.01	16756.01	-	-	16781.01	16783.01	16782.01	16784.01
Δ 16736.05	Δ 16756.05	-	-	-	-	-	-
Δ 16736.07	Δ 16756.07	-	-	-	-	-	-
Δ 16736.08	Δ 16756.08	-	-	-	-	-	-
16736.10	16756.10	-	-	16781.10	16783.10	16782.10	16784.10
16736.11	16756.11	-	-	16781.11	16783.11	16782.11	16784.11
Δ 16736.12	Δ 16756.12	-	-	-	-	-	-
16736.21	16756.21	-	-	16781.21	16783.21	16782.21	16784.21
16736.22	16756.22	-	-	-	Δ 16783.22	Δ 16782.22	Δ 16784.22
16736.23	16756.23	-	-	-	Δ 16783.23	Δ 16782.23	Δ 16784.23
16736.24	Δ 16756.24	-	-	Δ 16781.24	Δ 16783.24	Δ 16782.24	-
Δ 16736.25	Δ 16756.25	-	-	-	-	-	-
Δ 16736.26	Δ 16756.26	-	-	-	-	-	-
Δ 16736.27	Δ 16756.27	-	-	-	-	-	-
Δ 16736.28	Δ 16756.28	-	-	-	-	-	-
Δ 16736.29	-	-	-	-	-	-	-
16736.31	16756.31	-	-	16781.31	16783.31	16782.31	16784.31
16736.32	16756.32	-	-	16781.32	16783.32	16782.32	16784.32
16736.33	16756.33	-	-	Δ 16781.33	Δ 16783.33	Δ 16782.33	16784.33
16736.34	16756.34	-	-	16781.34	16783.34	16782.34	16784.34
16736.36	16756.36	-	-	16781.36	16783.36	16782.36	16784.36
16736.37	16756.37	-	-	-	-	-	-
16736.46	16756.46	-	-	-	Δ 16783.46	Δ 16782.46	Δ 16784.46
16736.51	Δ 16756.51	-	-	-	-	-	-
Δ 16736.53	16756.53	-	-	-	-	-	-
16736.55	16756.55	-	-	-	-	-	-
16736.56	Δ 16756.56	-	-	-	-	-	-
Δ 16736.57	16756.57	-	-	-	-	-	-
Δ 16736.58	Δ 16756.58	-	-	-	-	-	-

Δ Available until stocks last



Cover plates guideline

		1- or 2-reduced module		3-module		4-module		5-module	
									
		Classica	Rondò	Classica	Rondò	Classica	Rondò	Classica	Rondò
Technopolymer									
	Bright white	17097.01	17098.01	16743.01	16763.01	16744.01	16764.01	16745.01	16765.01
	Granite white	Δ 17097.02	-	Δ 16743.02	-	-	Δ 16764.02	Δ 16745.02	Δ 16765.02
	Idea white	17097.04	17098.04	16743.04	16763.04	16744.04	16764.04	16745.04	16765.04
	Ruby red	-	-	-	-	-	-	-	-
	Sapphire blue	Δ 17097.10	Δ 17098.10	-	Δ 16763.10	Δ 16744.10	Δ 16764.10	Δ 16745.10	Δ 16765.10
	Emerald green	-	Δ 17098.13	-	Δ 16763.13	-	Δ 16764.13	Δ 16745.13	-
	Graphite grey	17097.15	17098.15	16743.15	16763.15	16744.15	16764.15	16745.15	16765.15
	Black	17097.16	17098.16	16743.16	16763.16	16744.16	16764.16	16745.16	16765.16
Silk									
	White	Δ 17097.D.01	-	Δ 16743.D.01	Δ 16763.D.01	Δ 16744.D.01	Δ 16764.D.01	Δ 16745.D.01	Δ 16765.D.01
	Granite white	-	Δ 17098.D.02	-	Δ 16763.D.02	Δ 16744.D.02	Δ 16764.D.02	Δ 16745.D.02	Δ 16765.D.02
	Idea white	17097.D.04	17098.D.04	16743.D.04	16763.D.04	16744.D.04	16764.D.04	16745.D.04	16765.D.04
	Red	Δ 17097.D.07	Δ 17098.D.07	-	-	-	-	-	-
	Blue	Δ 17097.D.10	Δ 17098.D.10	Δ 16743.D.10	-	Δ 16744.D.10	Δ 16764.D.10	Δ 16745.D.10	Δ 16765.D.10
	Green	Δ 17097.D.13	-	Δ 16743.D.13	Δ 16763.D.13	-	Δ 16764.D.13	Δ 16745.D.13	-
	Graphite	17097.D.15	17098.D.15	16743.D.15	16763.D.15	16744.D.15	16764.D.15	16745.D.15	16765.D.15
	Black	17097.D.16	17098.D.16	16743.D.16	16763.D.16	16744.D.16	16764.D.16	16745.D.16	16765.D.16

12- and 18-module cover plates

Technopolymer									
	White	-	-	-	-	-	-	-	-
	Idea white	-	-	-	-	-	-	-	-
	Idea grey	-	-	-	-	-	-	-	-
	Black	-	-	-	-	-	-	-	-
	Metallized anthracite	-	-	-	-	-	-	-	-

Cover plates guideline

6-module		12-module	18-module	Panel mounting 1-module		Panel mounting 2-module	
							
Classica	Rondò	Classica	Classica	Classica	Rondò	Classica	Rondò
16746.01	16766.01	-	-	16786.01	-	16787.01	-
Δ 16746.02	-	-	-	-	-	-	-
16746.04	16766.04	-	-	16786.04	-	16787.04	-
-	-	-	-	-	-	-	-
Δ 16746.10	Δ 16766.10	-	-	-	-	-	-
-	-	-	-	-	-	-	-
16746.15	16766.15	-	-	16786.15	-	16787.15	-
16746.16	16766.16	-	-	16786.16	-	16787.16	-
Δ 16746.D.01	Δ 16766.D.01	-	-	-	-	-	-
-	Δ 16766.D.02	-	-	-	-	-	-
16746.D.04	16766.D.04	-	-	-	-	-	-
-	-	-	-	-	-	-	-
Δ 16746.D.10	Δ 16766.D.10	-	-	-	-	-	-
Δ 16746.D.13	Δ 16766.D.13	-	-	-	-	-	-
16746.D.15	16766.D.15	-	-	-	-	-	-
16746.D.16	16766.D.16	-	-	-	-	-	-
-	-	16748.01	16749.01	-	-	-	-
-	-	16748.04	16749.04	-	-	-	-
-	-	16748.14	16749.14	-	-	-	-
-	-	16748.16	16749.16	-	-	-	-
-	-	16748.V23	16749.V23	-	-	-	-





Δ Available until stocks last





Type of mounting

Module	Box		
1 and 2 reduced modules for $\varnothing$ 60 mm and 56x56 mm mounting box	Flush mounting		Surface mounting
	 V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black	 V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 09971.A 43,5 mm deep, RAL 9001 ivory 09971.01: white
2 and 3	Flush mounting		Surface mounting
	 V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black	 V71703 For hollow walls GW 850 °C, light blue	 09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white
			Table mounting
			 16803 3 modules, grey 16803.B white
4	Flush mounting		Surface mounting
	 V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black	 V71704 For hollow walls GW 850 °C, light blue	 Δ 09976.04 30 mm deep, Idea white 09976.14: Idea grey
5	Flush mounting		
	 V71305 For masonry GW 650 °C, light blue V71305.AU GW 960 °C, black		

Frame	Cover plate
17080 1-module, with claws, smooth front, grey 17080.B As above, white 17081 1-module, with claws, grooved front, grey 17081.B As above, white 17082 2 reduced modules, with claws 17086 1-module, without screws, smooth front, grey 17086.B As above, white 17087 2 reduced modules, without screws	Classica 17092... 17097... 17097.D... 1 or 2 reduced modules. Dimensions: 88x80x9 mm Rondò 17093... 17098... 17098.D... 1 or 2 reduced modules. Dimensions: 91x80x9 mm
16722/16722.L 2-module, without screws, grooved/smooth front, grey 16722.B/16722.L.B As above, white 16813.Q 3-module, with screws, IP55, grey (only for metal, techopolymer and Silk Classica cover plate) 16813.Q.B As above, white 16713 3-module, with screws 16723 3-module, with screws, to use for installation of Arké devices, grey 16723.B As above, white	Classica 16733... 16743... 16743.D... 3 modules. Dimensions: 120x82x9 mm Rondò 16753... 16763... 16763.D... 3 modules. Dimensions: 123x82x9 mm
16714 4-module, with screws	Classica 16734... 16744... 16744.D... 4 modules. Dimensions: 145x82x9 mm Rondò 16754... 16764... 16764.D... 4 modules. Dimensions: 148x82x9 mm
16715 5-module, with screws	Classica 16745... 16745.D... 5 modules. Dimensions: 170x82x9 mm Rondò 16765... 16765.D... 5 modules. Dimensions: 173x82x9 mm

Type of mounting

Module	Box	
6	Flush mounting  V71306 For masonry GW 650 °C, light blue  V71706 For hollow walls GW 850 °C, light blue  V71306.AU GW 960 °C, black	Table mounting  16806 6 modules, grey  16806.B As above, white
12	Flush mounting  V71320 For masonry GW 650 °C, light blue  V71720 For hollow walls GW 850 °C, light blue	Surface mounting  Δ 09920.04: Idea white  Δ 09920.14: Idea grey
18	Flush mounting  V71321 For masonry GW 650 °C, light blue	Surface mounting  Δ 09921.04: Idea white  Δ 09921.14: Idea grey
1	Panel mounting  16776.AU GW 960 °C	
2	Panel mounting  16776.AU x 2 GW 960 °C	

Frame	Cover plate
 16716 6-module, with screws	Classica  16736... 16746... 16746.D... 6 modules. Dimensions: 195x82x9 mm Rondò  16756... 16766... 16766.D... 6 modules. Dimensions: 198x82x9 mm
 16718 12-module, with screws	Classica  16748... 12 modules, with signalling tags. Dimensions: 206x150x11 mm
 16719 18-module, with screws	Classica  16749... 18 modules, with signalling tags. Dimensions: 206x222x11 mm
 16771 1 module	Classica  16781... 16786... 1 module (metal and technopolymer). Dimensions: 40x80x9 mm Rondò  16783... 1 module (metal only). Dimensions: 41x85x9 mm
 16772 2 modules	Classica  16782... 16787... 2 modules (metal and technopolymer). Dimensions: 40x136x9 mm Rondò  16784... 2 modules (metal only). Dimensions: 41x141x9 mm

Customization

Devices and cover plates customization

Vimar laser technology allows the reproduction of any name, logotype or trademark, with absolute precision and indelebility, even for small quantities.

Information

- all devices, buttons and cover plates are customized depending on conditions described below;
- the following finishings of cover plates are not customizable: **Silk: red (.07), blue (.10), green (.13). Die-cast metal: antique brass (.37). 12-and 18-module cover plates: 16748.V23 and 16749.V23;**
- Wooden cover plate** customization: prices and quantities agreed with the commercial networks.
- for button engravings, make sure that the desired symbol or label is not already included in the table 'Standard symbols and wordings' below; if so, simply indicate the corresponding code in addition to the article code in your order.
- the customization is not visible in darkness.

Laser customization advantages

- indelible engraving that does not deteriorate over time;
- high-precision reproduction even of very fine lines and complex images;
- service available even for minimal quantities;
- possibility of ordering the same customization at different times with identical results.

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply

- a printout of the image to be reproduced, in black-and-white line drawing scaled 2 or 3 times larger than the finished size;
- an image in EPS, TIFF or JPEG format of the subject to be reproduced.

Things to avoid

- do not provide photocopies;
- do not fax the image to be reproduced, because the low definition of the fax makes it impossible to reproduce the customization with the high quality of laser system.

How to proceed

- enclose (without paper clips, staples or adhesive tape) or send the image to be reproduced;
- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.



Estimated lead times for devices and cover plates

- 10 working days for the sample;
- 10 working days from confirmation for completed order.

Customizable positions




Customized cover plate



Only for die-cast metal cover plates



Customizable switches and buttons



Customization **not visible** in darkness.

Smart card customization

The rear of the card can be customised on request, by providing a digital image of the subject in eps, tiff or jpg format.



Standard symbols and wordings (♦ symbols on catalogue devices)


																	
♦S16.001	S16.002	S16.003	S16.004	S16.011	♦S16.029	S16.030	S16.031	S16.032	S16.033	S16.034	S16.035	S16.036	S16.037	S16.038	♦S16.039	♦S16.040	
																	
S16.047	♦S16.049	S16.050	S16.051	S16.052	♦S16.053	♦S16.054	♦S16.055	♦S16.056	♦S16.057	♦S16.058	♦S16.059	♦S16.060	S16.061	S16.062	S16.063	S16.064	
																	
S16.065	S16.066	S16.067	S16.068	S16.069	S16.070	S16.071	S16.072	♦S16.073	♦S16.074	S16.075	S16.076	S16.077	S16.078	S16.113	S16.114	S16.115	
																	
S16.116	♦S16.117	S16.125	S16.126	S16.127	S16.152	S16.164	S16.170	S16.171	S16.172	S16.173	S16.174	S16.175	S16.176	S16.177	S16.178	S16.179	
4	5	6	7	8	9	make up room	do not disturb	light	open	close	alarm	come in	back	stairs	bathroom	cellar	
S16.180	S16.181	S16.182	S16.183	S16.184	S16.185	S16.186	S16.187	S16.188.EN	S16.189.EN	S16.190.EN	S16.191.EN	S16.192.EN	S16.193.EN	S16.194.EN	S16.195.EN	S16.196.EN	
storeroom	attic	terrace	outside	garden	garage	general											
S16.197.EN	S16.198.EN	S16.199.EN	S16.200.EN	S16.201.EN	S16.202	S16.203.EN	S16.205	S16.206	S16.207	S16.208	S16.209						

Isoset: IP40 and IP55

IP40 flush consumer units - 8 modules



Δ V53908
For masonry,
light blue



V71720
For hollow walls,
GW 650 °C, light blue



With transparent door and DIN (60715 TH35) rail

Δ **V53008.G:** Idea grey
Δ **V53008.B:** Idea white
Δ **V53008.N:** Black

Δ **V53008.Z:** White
Δ **V53008.V23:** Metallized anthracite

IP40 flush consumer units - 12 modules



Δ V53912
For masonry,
light blue



With transparent door and DIN (60715 TH35) rail

Δ **V53012.G:** Idea grey
Δ **V53012.N:** Black

Δ **V53012.V23:** Metallized anthracite


Supports on DIN (60715 TH35) rail installation



16726
1-module,
occupies 2 17,5 mm
modules,
RAL 7035 grey



16727
2-module,
occupies 3,5 17,5 mm
modules,
RAL 7035 grey



Example of installation

IP40 and IP55 enclosures

Modules	IP40	IP55	IP55 cover
2	 13023*	 13523	
3	 13033*	 13533	 13733.Q*
4	 13045*	 13545	 13745.Q*



Viale Vicenza, 14
36063 Marostica VI - Italy
Tel. +39 0424 488 600
Fax +39 0424 488 709
www.vimar.com