



Multi-spot and  
new Tracklighting  
Collection





Via G. Pastore, 2  
55041 Capezzano Pianore  
Lucca - Italia  
tel. +39 0584 969632  
fax +39 0584 969578  
info@bcmilluminazione.com

[www.bcmilluminazione.com](http://www.bcmilluminazione.com)

## Tracklight

NEW

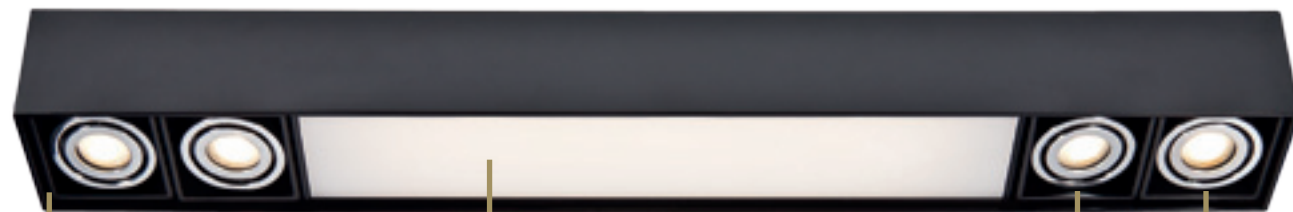

BLADE ONE A

MINI  
ANAFI

*tailored  
lighting  
system in  
progress...*



anafi 1

H35, H50mm



POWER LED

STD3000°K

OPT6000°K

2700°K

RGBW

Various finishes available.

H35-H50 versions: available with frosted protective glass (wide beam) or with lens (optics: 10° or 40°).

H50 version also available with honey-comb and spacer.

1 x max 3W

1 x max 4W



78x78mm (3.07x3.07in)

15mm (0.59in)

0.13mm (0.0051in)

77x77mm (3.03x3.03in)

ANAFI I - H35

3W - 4W

1 x max 8W

1 x max 9W



78x78mm (3.07x3.07in)

50mm (1.97in)

0.26mm (0.0102in)

77x77mm (3.03x3.03in)

ANAFI I - H50

8W - 9W

2 x max 3W

2 x max 4W



POWER LED

STD3000°K

OPT6000°K

2700°K

RGBW

Various finishes available.

H35-H50 versions: available with frosted protective glass (wide beam) or with lens (optics: 10° or 40°).

H50 version also available with honey-comb and spacer.

2 x max 3W

2 x max 4W



153x78mm (6.02x3.07in)

35mm (1.38in)

0.13mm (0.0051in)

152x77mm (5.98x3.03in)

ANAFI 2 - H35

6W - 8W

2 x max 8W

2 x max 9W



153x78mm (6.02x3.07in)

50mm (1.97in)

0.26mm (0.0102in)

152x77mm (5.98x3.03in)

ANAFI 2 - H50

16W - 18W

3 x max 3W

3 x max 4W



POWER LED

STD3000°K

OPT6000°K

2700°K

RGBW

Various finishes available.

H35-H50 versions: available with frosted protective glass (wide beam) or with lens (optics: 10° or 40°).

H50 version also available with honey-comb and spacer.

3 x max 3W

3 x max 4W



228x78mm (8.98x3.07in)

35mm (1.38in)

0.13mm (0.0051in)

227x77mm (8.94x3.03in)

ANAFI 3 - H35

9W - 12W

3 x max 8W

3 x max 9W



228x78mm (8.98x3.07in)

50mm (1.97in)

0.26mm (0.0102in)

227x77mm (8.94x3.03in)

ANAFI 3 - H50

24W - 27W

1 x max 3W

1 x max 4W



POWER LED

STD3000°K

OPT6000°K

2700°K

RGBW

Various finishes available.

H35-H50 versions: available with frosted protective glass (wide beam) or with lens (optics: 10° or 40°).

H50 version also available with honey-comb and spacer.

1 x max 3W

1 x max 4W



82x82mm (3.23x3.23in)

35mm (1.38in)

1.13mm (0.0449in)

100x100mm (3.94x3.94in)

EVIA I - H35

3W - 4W

1 x max 8W

1 x max 9W



82x82mm (3.23x3.23in)

50mm (1.97in)

1.26mm (0.0496in)

100x100mm (3.94x3.94in)

EVIA I - H50

8W - 9W

2 x max 3W

2 x max 4W



POWER LED

STD3000°K

OPT6000°K

2700°K

RGBW

Various finishes available.

H35-H50 versions: available with frosted protective glass (wide beam) or with lens (optics: 10° or 40°).

H50 version also available with honey-comb and spacer.

2 x max 3W

2 x max 4W



157x82mm (6.18x3.23in)

35mm (1.38in)

1.13mm (0.0449in)

175x100mm (6.89x3.94in)

EVIA 2 - H35

6W - 8W

2 x max 8W

2 x max 9W



157x82mm (6.18x3.23in)

50mm (1.97in)

1.26mm (0.0496in)

175x100mm (6.89x3.94in)

EVIA 2 - H50

16W - 18W

3 x max 3W

3 x max 4W



POWER LED

STD3000°K

OPT6000°K

2700°K

RGBW

Various finishes available.

H35-H50 versions: available with frosted protective glass (wide beam) or with lens (optics: 10° or 40°).

H50 version also available with honey-comb and spacer.

3 x max 3W

3 x max 4W



232x82mm (9.13x3.23in)

35mm (1.38in)

1.13mm (0.0449in)

250x100mm (9.84x3.94in)

EVIA 3 - H35

9W - 12W

3 x max 8W

3 x max 9W



232x82mm (9.13x3.23in)

50mm (1.97in)

1.26mm (0.0496in)

250x100mm (9.84x3.94in)

EVIA 3 - H50

24W - 27W

35x35mm

1.38x1.38in



35x35mm (1.38x1.38in)

3mm (0.12in)

MINI ANAFI

1W

40x40mm

1.57x1.57in



50x50mm (1.97x1.97in)

39mm (1.53in)

1.5mm (0.06in)

MINI EVIA I

1W

70x40mm

2.75x1.57in



85x50mm (3.35x1.97in)

39mm (1.53in)

1.5mm (0.06in)

MINI EVIA 2

2W