

*bcml*  
BENEDETTI LIGHTING



NEW 2022



## Colori freddi - Cold colours

20  
 bianco  
 white

23  
 nero  
 black


4  
 acciaio inox  
 stainless steel

34  
 acciaio inox satinato  
 satin stainless steel


3  
 cromo lucido  
 polished chrome

11  
 cromo satinato  
 satin chrome

10  
 nickel lucido  
 polished nickel

39  
 nickel satinato v. opaco  
 satin nickel matt p. \*

8  
 nickel nero lucido  
 polished black nickel \*

44  
 nickel nero satinato v. opaco  
 satin black nickel matt p. \*

## Colori caldi - Warm colours


19  
 ottone lucido  
 polished brass \*

49  
 ottone satinato v. opaco  
 satin brass matt p. \*

7  
 ottone brunito  
 burnished brass

37  
 ottone brunito v. opaco  
 burnished brass matt p. \*

15  
 rame lucido  
 polished copper \*

45  
 rame lucido v. opaco  
 polished copper matt p. \*



\* NEW



# defender 1

. 55

. 70

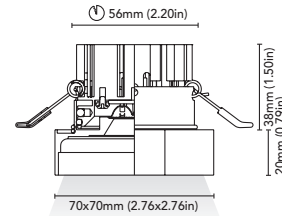

CODE	<b>3483-55-T3W</b> <b>3483-55-V3W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	<b>T3W:</b> 350mA - driver not included <b>V3W:</b> 8-32 Vdc - driver on board
PROTECTION	<b>V3W:</b> FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	NARROW
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 217(324)lm* 1mt 1768lx 2mt 442lx 3mt 196lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
BEAM	MEDIUM, WIDE
LED COLOUR	2700K, 4000K

CODE	<b>3483-70-T6W</b> <b>3483-70-V6W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	<b>T6W:</b> 700mA - driver not included <b>V6W:</b> 8-32 Vdc - driver on board
PROTECTION	<b>V6W:</b> FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	NARROW
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 325(567)lm* 1mt 2648lx 2mt 662lx 3mt 294lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
BEAM	MEDIUM, WIDE
LED COLOUR	2700K, 4000K



defender 1 . 55



defender 1 . 70

	FINISHES	FE	20 23 3 7 8 10 11 15 19 37 39 44 45 49
		I	23 20 ● ○ Colour 20 on request







# defender 1 plus


. 55

. 70

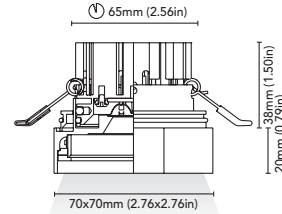


CODE	<b>3485-55-T3W</b> <b>3485-55-V3W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 3W + 1,5W (COURTESY)
SUPPLY	<b>T3W:</b> 350mA - driver not included <b>V3W:</b> 8-32 Vdc - driver on board <b>COURTESY:</b> 24 Vdc
PROTECTION	<b>V3W:</b> FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	NARROW
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 217(324)lm* 1mt 1768lx 2mt 442lx 3mt 196lx IP40
WEIGHT	
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
BEAM	MEDIUM, WIDE
LED COLOUR	2700K, 4000K


CODE	<b>3485-70-T6W</b> <b>3485-70-V6W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W + 2W (COURTESY)
SUPPLY	<b>T6W:</b> 700mA - driver not included <b>V6W:</b> 8-32 Vdc - driver on board <b>COURTESY:</b> 24 Vdc
PROTECTION	<b>V6W:</b> FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	NARROW
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 325(567)lm* 1mt 2648lx 2mt 662lx 3mt 294lx IP40
WEIGHT	
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
BEAM	MEDIUM, WIDE
LED COLOUR	2700K, 4000K

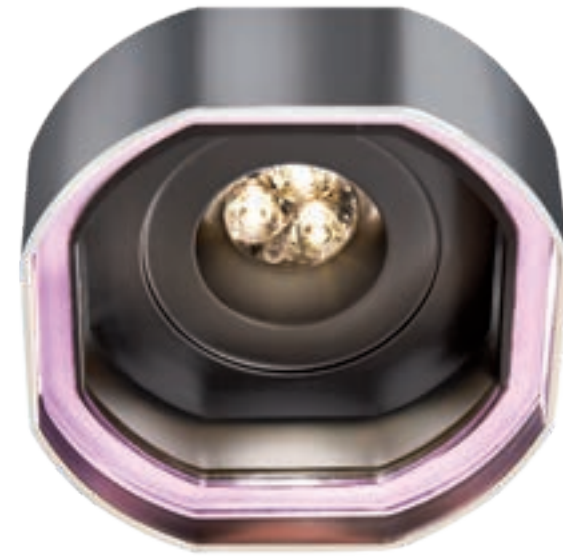

defender 1 plus . 55

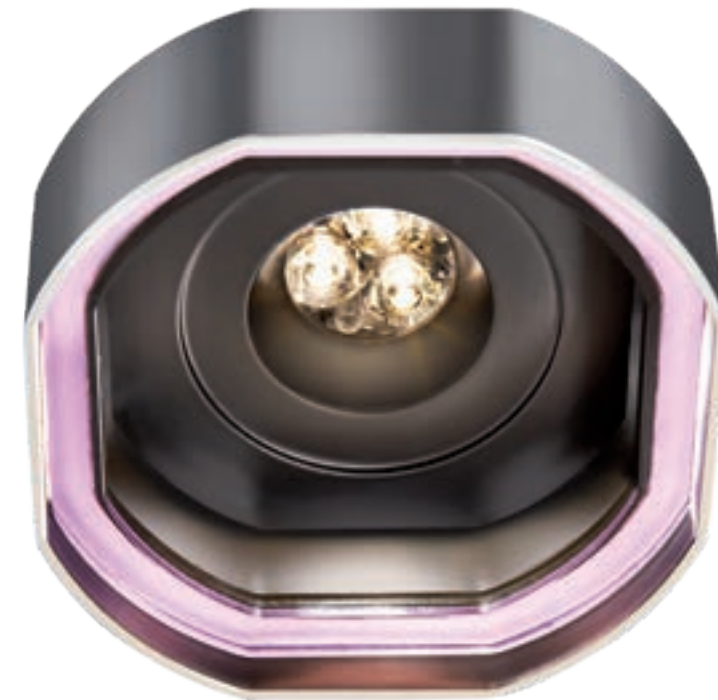

defender 1 plus . 70





FINISHES	FE	20 23 3 7 8 10 11 15 19 37 39 44 45 49
	I	23 20 Colour 20 on request



# defender 2

## . 55




## . 70

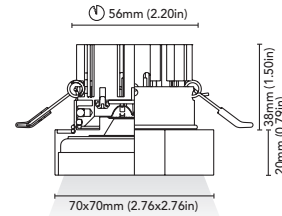


CODE	<b>3484-55-T3W</b> <b>3484-55-V3W</b>
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 12.5°
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	<b>T3W:</b> 350mA - driver not included <b>V3W:</b> 8-32 Vdc - driver on board
PROTECTION	<b>V3W:</b> FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	NARROW
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 217(324)lm* 1mt 1768lx 2mt 442lx 3mt 196lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS ADJUSTABLE SPHERE: STAINLESS STEEL HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
BEAM	MEDIUM, WIDE
LED COLOUR	2700K, 4000K

CODE	<b>3484-70-T6W</b> <b>3484-70-V6W</b>
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 12.5°
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	<b>T6W:</b> 700mA - driver not included <b>V6W:</b> 8-32 Vdc - driver on board
PROTECTION	<b>V6W:</b> FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	NARROW
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 325(567)lm* 1mt 2648lx 2mt 662lx 3mt 294lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS ADJUSTABLE SPHERE: STAINLESS STEEL HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
BEAM	MEDIUM, WIDE
LED COLOUR	2700K, 4000K

\* Measures obtained using our standard black reflector. In brackets lumen of the emitting led source.

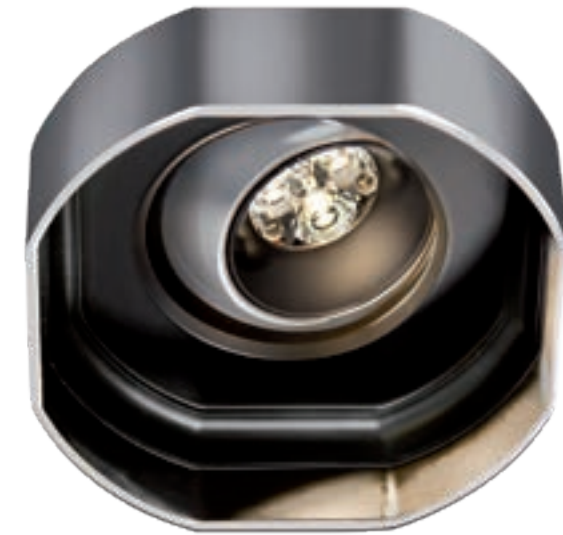

defender 2 . 55

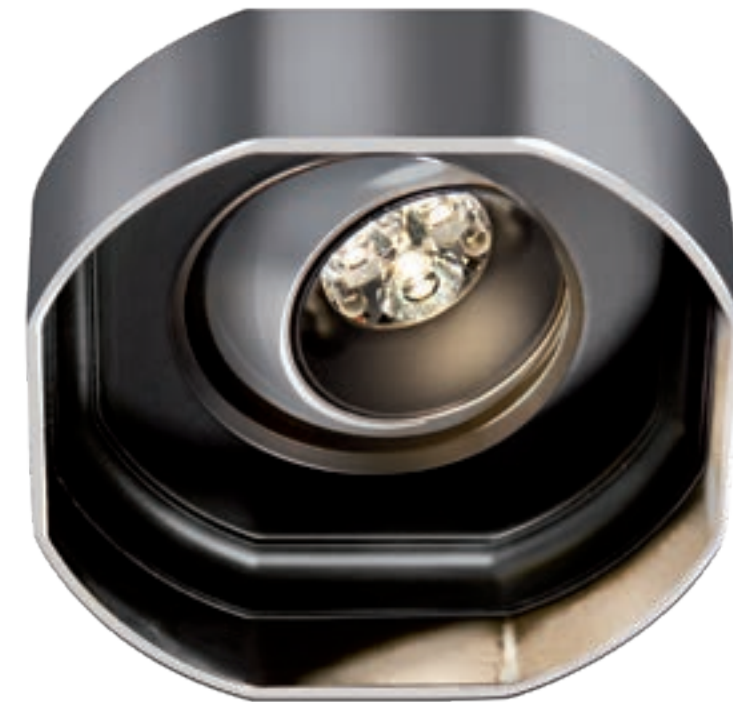

defender 2 . 70





FINISHES	FE	20 23 3 7 8 10 11 15 19 37 39 44 45 49
	I=C	23 20 ● ○ Colour 20 on request
	R	4 ●



# defender 2 plus


## . 55

## . 70

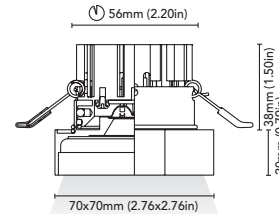

CODE	<b>3486-55-T3W</b> <b>3486-55-V3W</b>
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	▲ 12.5°
LIGHT SOURCE	POWER LED
POWER	MAX 3W + 1,5W (COURTESY) <b>T3W:</b> 350mA - driver not included <b>V3W:</b> 8-32 Vdc - driver on board <b>COURTESY:</b> 24 Vdc
SUPPLY	<b>V3W:</b> FUSE - POLARITY REVERSE SPIKE FILTER
PROTECTION	YES
DIMMABLE	YES
BEAM	NARROW
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 217(324)lm* 1mt 1768lx 2mt 442lx 3mt 196lx IP40
IP RATE	
WEIGHT	
MATERIALS	BODY: BRASS ADJUSTABLE SPHERE: STAINLESS STEEL HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
BEAM	MEDIUM, WIDE
LED COLOUR	2700K, 4000K

CODE	<b>3486-70-T6W</b> <b>3486-70-V6W</b>
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	▲ 12.5°
LIGHT SOURCE	POWER LED
POWER	MAX 6W + 2W (COURTESY) <b>T6W:</b> 700mA - driver not included <b>V6W:</b> 8-32 Vdc - driver on board <b>COURTESY:</b> 24 Vdc
SUPPLY	<b>V6W:</b> FUSE - POLARITY REVERSE SPIKE FILTER
PROTECTION	YES
DIMMABLE	YES
BEAM	NARROW
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 325(567)lm* 1mt 2648lx 2mt 662lx 3mt 294lx IP40
IP RATE	
WEIGHT	
MATERIALS	BODY: BRASS ADJUSTABLE SPHERE: STAINLESS STEEL HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
BEAM	MEDIUM, WIDE
LED COLOUR	2700K, 4000K

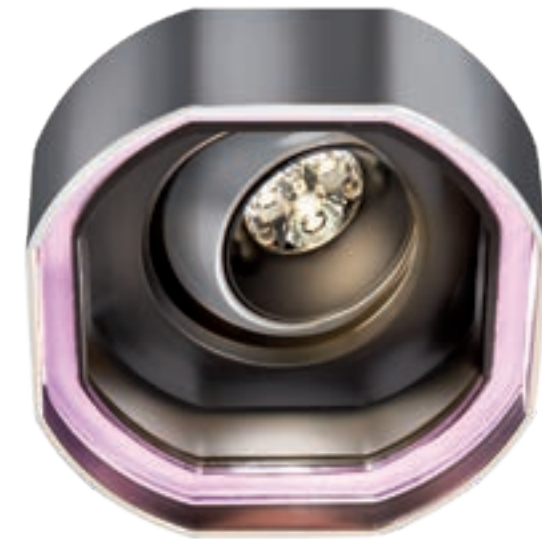

defender 2 plus . 55



defender 2 plus . 70




FINISHES	FE	20 23 3 7 8 10 11 15 19 37 39 44 45 49
	I=C	23 20 ● ○ Colour 20 on request
	R	4 ●




# urano

. 60


. 60



CODE	<b>3434-60-E6W</b> <b>3434-60-F6W</b> <b>3434-60V-E6W</b> <b>3434-60V-F6W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	<b>E6W:</b> 150mA - driver not included <b>F6W:</b> 16-32 Vdc - driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS+ANTI GLARE BLACK HONEYCOMB LOUVER
LED COLOUR	3000K CRI TYP98 LMN 180(578)lm* 1mt 432lx 2mt 108lx 3mt 48lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K, 4000K



\* This colour evaluation sample refers only to product with CRI typ 98.

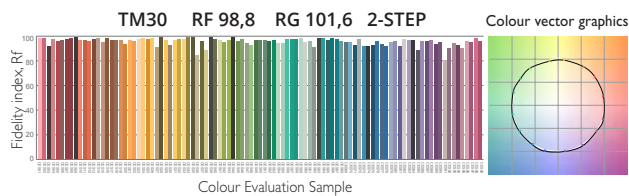

urano . 60



urano . V60



FINISHES	FE	20	23	4	34
	I	23	20	Colour 20 on request	







# queen

## . 50



## . 70




CODE	<b>3489-50-E3W</b> <b>3489-50-F3W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	<b>E3W:</b> 150mA - driver not included <b>F3W:</b> 16-32 Vdc - driver on board
PROTECTION	<b>F3W:</b> FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS+ANTI GLARE BLACK HONEYCOMB LOUVER
LED COLOUR	3000K CRI TYP98 LMN 100(306,34)lm* 1mt 240lx 2mt 60lx 3mt 27lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL LED COLOUR	2700K, 4000K

CODE	<b>3489-70-E6W</b> <b>3489-70-F6W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	<b>E6W:</b> 350mA - driver not included <b>F6W:</b> 16-32 Vdc - driver on board
PROTECTION	<b>F6W:</b> FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS+ANTI GLARE BLACK HONEYCOMB LOUVER
LED COLOUR	3000K CRI TYP98 LMN 180(578)lm* 1mt 432lx 2mt 108lx 3mt 48lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL LED COLOUR	2700K, 4000K

\* Measures obtained using our standard black reflector with black honeycomb and satin lens. In brackets lumen of the emitting led source.



\* This colour evaluation sample refers only to product with CRI typ 98.

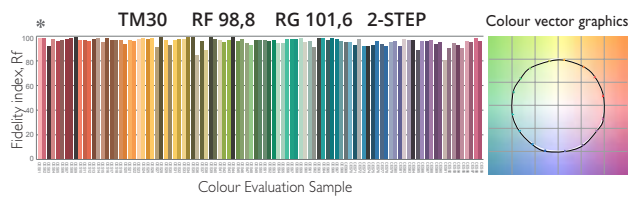

FINISHES	FE	20 23 3 7 8 10 11 15 19 37 39 44 45 49
	I	23 20 ● ○ Colour 20 on request



queen . 50





queen . 70





# izar 1

. 40




<b>CODE</b>	<b>3494-40-T1.5W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 1,5W
<b>SUPPLY</b>	150mA - driver not included
<b>PROTECTION</b>	
<b>DIMMABLE</b>	YES
<b>BEAM</b>	NARROW
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	BAND SPRINGS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	MEDIUM, WIDE

<b>CODE</b>	<b>3494-40-T3W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 3W
<b>SUPPLY</b>	350mA - driver not included
<b>PROTECTION</b>	
<b>DIMMABLE</b>	YES
<b>BEAM</b>	NARROW
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	BAND SPRINGS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	MEDIUM, WIDE



izar 1 . 40



**FE**

**FINISHES**

**FE**


20 23 3 7 8 10 11 15 19 37 39 44 45 49

4 34



# izar 2


. 40



CODE	<b>3495-40-T1.5W</b>
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 12.5°
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	150mA - driver not included
PROTECTION	
DIMMABLE	YES
BEAM	NARROW
SCREEN	LENS
LED COLOUR	3000K CRI >90
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
MOUNTING SYSTEM	BAND SPRINGS
OPTIONAL	
LED COLOUR	2700K, 4000K
BEAM	MEDIUM, WIDE




izar 2 . 40



**FINISHES**



**FE=R**

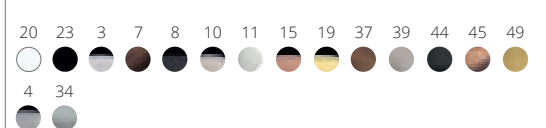



# izar 3

. 40



<b>CODE</b>	<b>3496-40-T1.5W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 1,5W
<b>SUPPLY</b>	150mA - driver not included
<b>PROTECTION</b>	
<b>DIMMABLE</b>	YES
<b>BEAM</b>	NARROW
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	BAND SPRINGS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	MEDIUM, WIDE

<b>CODE</b>	<b>3496-40-T3W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 3W
<b>SUPPLY</b>	350mA - driver not included
<b>PROTECTION</b>	
<b>DIMMABLE</b>	YES
<b>BEAM</b>	NARROW
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	BAND SPRINGS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	MEDIUM, WIDE



izar 3 . 40




FINISHES	FE	20 23 3 7 8 10 11 15 19 37 39 44 45 49
	I	4 34
		23 20 ● ○ Colour 20 on request





# izar 4

. 40



<b>CODE</b>	<b>3497-40-T1.5W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 1,5W
<b>SUPPLY</b>	150mA - driver not included
<b>PROTECTION</b>	
<b>DIMMABLE</b>	YES
<b>BEAM</b>	NARROW
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	MEDIUM, WIDE



izar 4 . 40





FINISHES	20	23	3	7	8	10	11	15	19	37	39	44	45	49
	4	34												



# ross 1

. 40



<b>CODE</b>	<b>3490-40-Z1W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 1W
<b>SUPPLY</b>	8-32 Vdc - driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	MEDIUM
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	BAND SPRINGS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	NARROW, WIDE


<b>CODE</b>	<b>3490-40-Z2W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 2W
<b>SUPPLY</b>	8-32 Vdc - driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	MEDIUM
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	BAND SPRINGS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	NARROW, WIDE



ross 1 . 40




ross 1 . 40

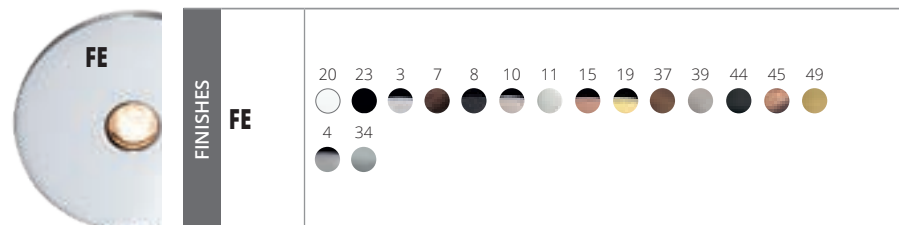



# ross 2

. 40



<b>CODE</b>	<b>3491-40-Z1W</b>
<b>FIXTURE</b>	ADJUSTABLE DOWNLIGHT
<b>ADJUSTABILITY</b>	12.5°
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 1W
<b>SUPPLY</b>	8-32 Vdc - driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	MEDIUM
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	BAND SPRINGS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	NARROW, WIDE



ross 2 . 40





FINISHES	FE=R	20	23	3	7	8	10	11	15	19	37	39	44	45	49
		4	34												





# ross 3

. 40



<b>CODE</b>	<b>3492-40-Z1W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 1W
<b>SUPPLY</b>	8-32 Vdc - driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	MEDIUM
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	BAND SPRINGS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	NARROW, WIDE

<b>CODE</b>	<b>3492-40-Z2W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 2W
<b>SUPPLY</b>	8-32 Vdc - driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	MEDIUM
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	BAND SPRINGS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	NARROW, WIDE




ross 3 . 40

	FINISHES	20	23	3	7	8	10	11	15	19	37	39	44	45	49	
		4	34													
	I	23	20	Colour 20 on request												



# ross 4


. 40



<b>CODE</b>	<b>3493-40-Z1W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 1W
<b>SUPPLY</b>	8-32 Vdc - driver on board
<b>PROTECTION</b>	
<b>DIMMABLE</b>	YES
<b>BEAM</b>	MEDIUM
<b>SCREEN</b>	
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL AISI 316 HEATSINK: ALUMINUM
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	NARROW, WIDE



ross 4 . 40

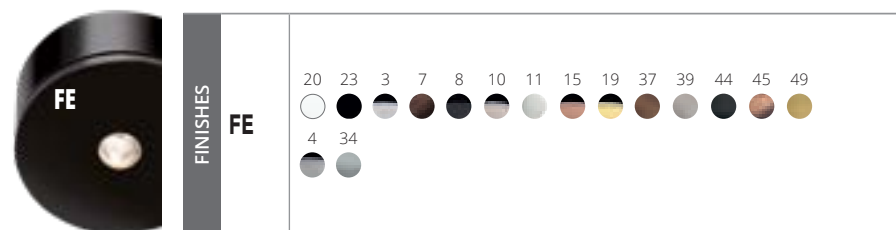








# orione

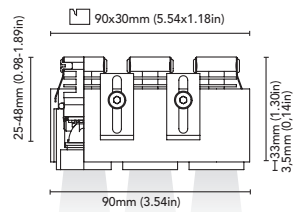

<b>CODE</b>	<b>3487-90-3U2W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 3 X 2W
<b>SUPPLY</b>	700mA - driver not included
<b>PROTECTION</b>	
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP20
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS OR STAINLESS STEEL HEATSINK: ALUMINIUM
<b>MOUNTING SYSTEM</b>	BRACKETS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	NARROW




orione

	FINISHES	R	20	23	3	7	8	10	11	15	19	37	39	44	45	49
		FE-C	23	20	Colour 20 on request											




# sirio

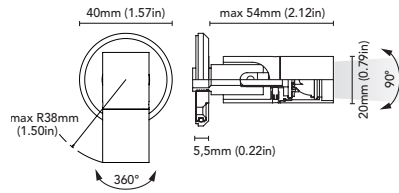

<b>CODE</b>	<b>2187-N-Z1W</b>
<b>FIXTURE</b>	READING LAMP
<b>ADJUSTABILITY</b>	YES
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 1W
<b>SUPPLY</b>	16-32 Vdc - driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >80
<b>IP RATE</b>	IP40
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K



sirio



FINISHES


FE

36

37



# vega 1



<b>CODE</b>	<b>2190-N-2B2W</b>
<b>FIXTURE</b>	READING LAMP
<b>ADJUSTABILITY</b>	YES
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	2 X MAX 2W
<b>SUPPLY</b>	8-32 Vdc - driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	FROSTED
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL LED COLOUR</b>	2700K, 4000K




vega 1



<b>FINISHES</b>	<b>FE</b>	20 23 3 7 8 10 11 15 19 37 39 44 45 49
	<b>I</b>	23 20 ● ○ Colour 20 on request



# vega 2

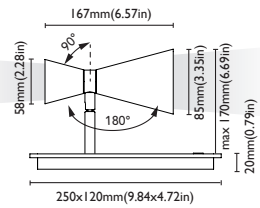

<b>CODE</b>	<b>2191-T-2B2W</b>
FIXTURE	READING LAMP
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	2 X MAX 2W
SUPPLY	8-32 Vdc - driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	FROSTED
LED COLOUR	3000K CRI >90
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS
SWITCH	TOUCH
<b>OPTIONAL</b>	
LED COLOUR	2700K, 4000K




vega 2



FINISHES	FE	20 23 3 7 8 10 11 15 19 37 39 44 45 49
	I	23 20 ● ○ Colour 20 on request



# vega 2 plus

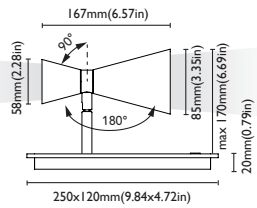

<b>CODE</b>	<b>2192-T-2B2W</b>
<b>FIXTURE</b>	READING LAMP
<b>ADJUSTABILITY</b>	YES
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	2 X MAX 2W + 4,5W (BACKLIGHT)
<b>SUPPLY</b>	<b>B2W:</b> 8-32 VDC - driver on board <b>BACKLIGHT:</b> 24VDC
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	FROSTED
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>SWITCH</b>	TOUCH
<b>OPTIONAL LED COLOUR</b>	2700K, 4000K




<b>FINISHES</b>	<b>FE</b>	20 23 3 7 8 10 11 15 19 37 39 44 45 49
	<b>I</b>	23 20 ● ○ Colour 20 on request







# rigel

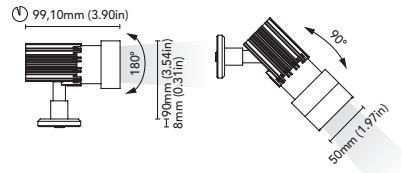

<b>CODE</b>	<b>2188-N-V6W</b>
<b>FIXTURE</b>	READING LAMP
<b>ADJUSTABILITY</b>	YES
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 6W
<b>SUPPLY</b>	8-32 Vdc - driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	NARROW
<b>SCREEN</b>	LENS+ANTIGLARE BLACK HONEYCOMB LOUVER
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K



# rigel




<b>FINISHES</b>	<b>FE</b>	20 23 3 7 8 10 11 15 19 37 39 44 45 49
	<b>I</b>	23 20 ● ○ Colour 20 on request




# ring 2


. 95

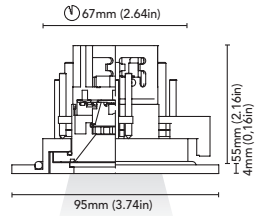

. 110

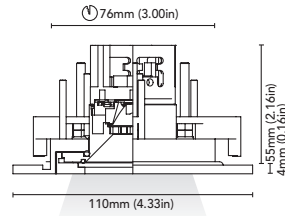

. 135

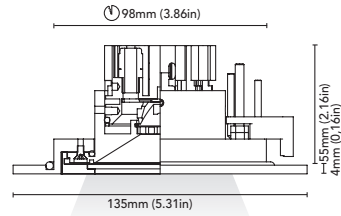

CODE

**9000-RING2-95**  
X URANO 60

FIXTURE

FRAME FOR URANO SERIES

MATERIALS

STAINLESS STEEL AISI 316

MOUNTING SYSTEM

SCREWS

**9000-RING2-110**  
X URANO 70

FRAME FOR URANO SERIES

STAINLESS STEEL AISI 316

SCREWS

**9000-RING2-135**  
X URANO 90

FRAME FOR URANO SERIES

STAINLESS STEEL AISI 316


SCREWS



ring 2 - 95, 110, 135




urano - 90 frame ring 2 - 135

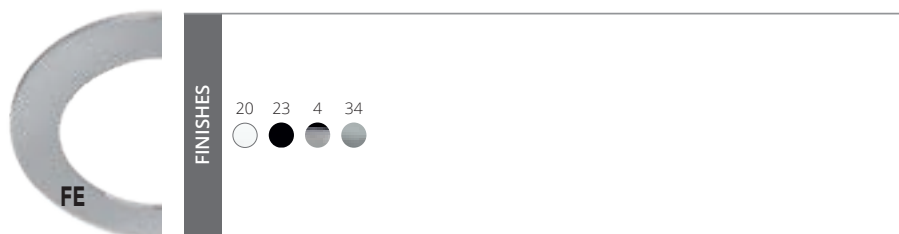



# shedir

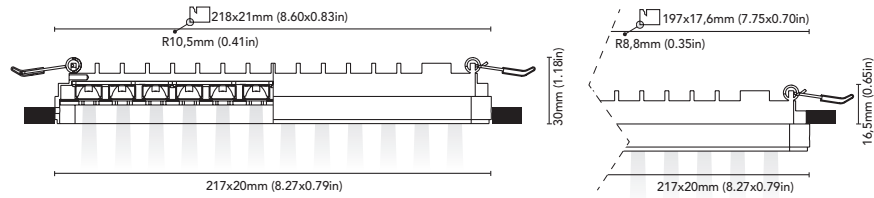

<b>CODE</b>	<b>3488-217A-Z8W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 8W
<b>SUPPLY</b>	16-32 Vdc - driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE - SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	MEDIUM
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP65X
<b>WEIGHT</b>	
<b>MATERIALS</b>	BODY: ALUMINUM
<b>MOUNTING SYSTEM</b>	WIRE SPRINGS
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K



<b>FINISHES</b>	<b>FE=I</b>	20	23
		<input type="radio"/>	<input checked="" type="radio"/>





# wave neon flex

## double bending



<b>CODE</b>	<b>5408-1MT-10W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 10W/M
SUPPLY	24 Vdc
PROTECTION	
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >90
IP RATE	IP67
WEIGHT	
MATERIALS	BODY: SILICONE
MOUNTING SYSTEM	CLIPS
<b>OPTIONAL</b>	
LED COLOUR	2700K, 4000K, 6000K





*bcml*  
BENEDETTI LIGHTING

Via G. Pastore, 2 - 55041 Capezzano Pianore - Lucca - Italia  
tel. +39 0584 969632 - fax +39 0584 969578 - [info@bcmilluminazione.com](mailto:info@bcmilluminazione.com)  
[www.bcmilluminazione.com](http://www.bcmilluminazione.com)