

bcn
BENEDETTI LIGHTING



NEW Lite & Bright
2024



ALTRE FINITURE SU RICHIESTA.
OTHER FINISHES ON REQUEST.


-  bianco
white
-  acciaio lucido
polished stainless steel
-  acciaio satinato
satin steel
-  cromo lucido
polished chrome

I colori per loro natura sono indicativi, ed eventuali leggere differenze sono da considerarsi nelle tolleranze. La spazzolatura delle finiture dona raffinatezza ai metalli ed è una particolarità che potrebbe variare secondo la tipologia dell'oggetto.
Colours are indicative for their own nature and any slight difference is to be considered within tolerance. Refined brushed finishes may vary according to the kind of item.




malibù


. 60 ag




. 75 ag

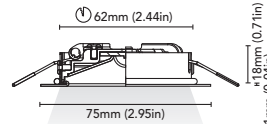


. 85 ag

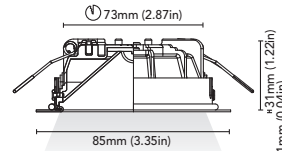


. 95 ag

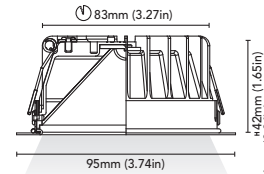


CODE	3521-60A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 60lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65




CODE	3521-75A-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 185lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



CODE	3521-85A-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



CODE	3521-95A-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 256lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

malibù - 60, 75, 85, 95 - ag








newport

. 85 ag


. 95 ag

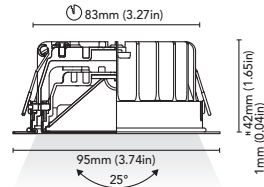

CODE	3525-85A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65




CODE	3525-95A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"


newport - 85, 95 - ag






orlando


. 60 ag




. 75 ag

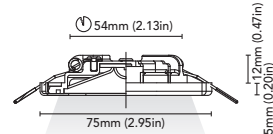


. 85 ag

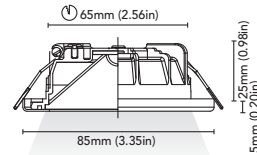


. 95 ag

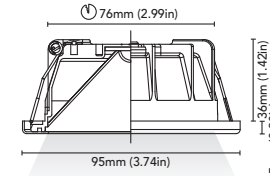


CODE	3520-60A-B1.5W 3520-60C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1.5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 60lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65




CODE	3520-75A-B2W 3520-75C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 185lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65
	*On request switch on the frame



CODE	3520-85A-B4W 3520-85C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65
	*On request switch on the frame




CODE	3520-95A-B6W 3520-95C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 256lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65
	*On request switch on the frame



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

orlando - 60, 75, 85, 95 - ag

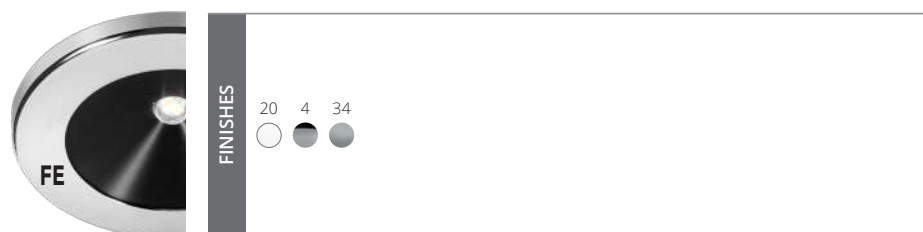

*switch








phoenix

. 85 ag


. 95 ag

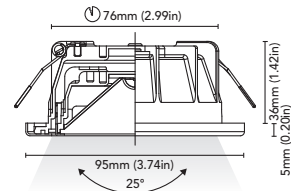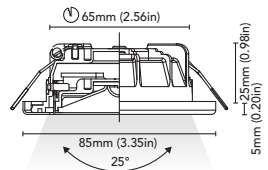

CODE	3524-85A-B2W 3524-85C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 185lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65
	*On request switch on the frame




CODE	3524-95A-B4W 3524-95C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65
	*On request switch on the frame



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

phoenix - 85, 95 - ag




*switch






seattle


. 55 ag




. 70 ag

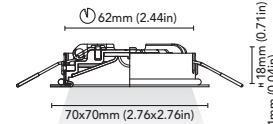


. 80 ag

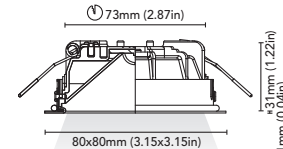


. 90 ag

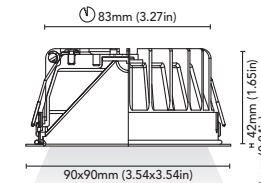


CODE	3523-55A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65




CODE	3523-70A-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



CODE	3523-80A-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65




CODE	3523-90A-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 256lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

seattle - 55, 70, 80, 90 - ag


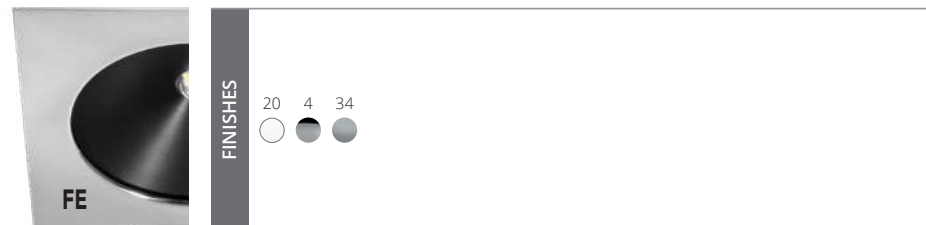





atlanta

• 80 ag


• 90 ag

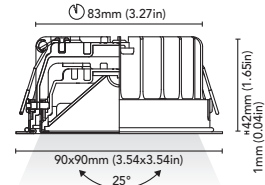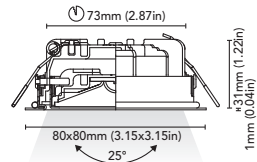

CODE	3527-80A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 185lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65




CODE	3527-90A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

atlanta - 80, 90 - ag

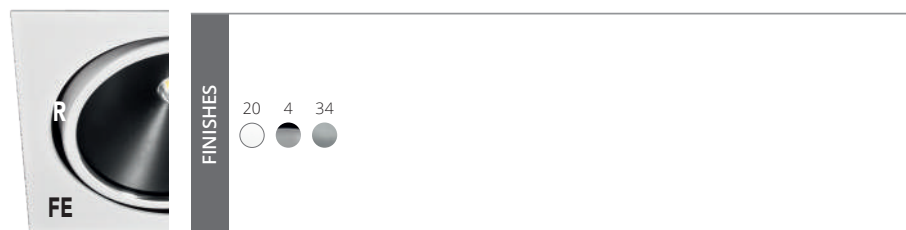







charlotte

. 55 ag


. 70 ag

. 80 ag


. 90 ag

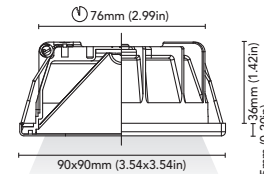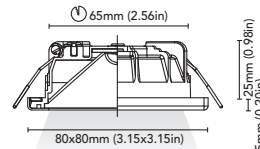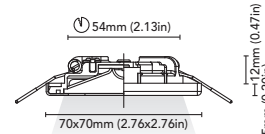


CODE	3522-55A-B1.5W 3522-55C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1.5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65




CODE	3522-70A-B2W 3522-70C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65
	*On request switch on the frame



CODE	3522-80A-B4W 3522-80C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65
	*On request switch on the frame




CODE	3522-90A-B6W 3522-90C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 256lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65
	*On request switch on the frame



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

charlotte - 55, 70, 80, 90 - ag

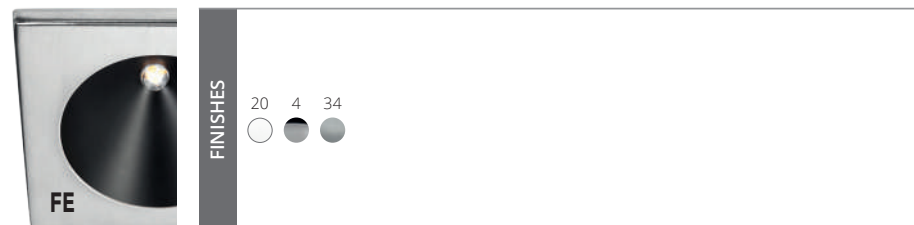

*switch








daytona

. 80 ag


. 90 ag

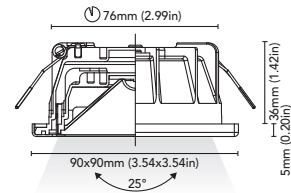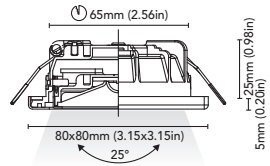

CODE	3526-80A-B2W 3526-80C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 185lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65 *On request switch on the frame



CODE	3526-90A-B4W 3526-90C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65 *On request switch on the frame



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

daytona - 80, 90 - ag



*switch







tampa


sarasota

. 40 ag


. 40 ag



CODE	3528-40-Z1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 66lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



CODE	3529-40-Z1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 66lm 1mt 2mt 3mt
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65




tampa 40 - ag



sarasota 40 - ag


"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

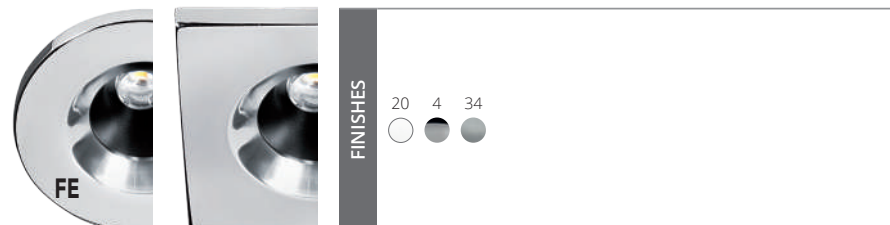




dallas


1L . 80

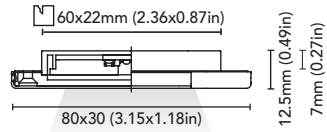


1L . 80 PLUS

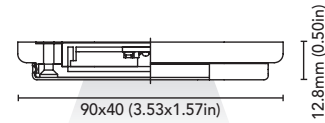

2L . 80

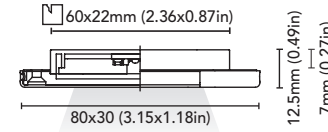

2L . 80 PLUS

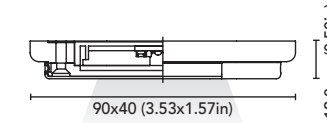

FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	

FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	

FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	


FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	



dallas 1L . 80



dallas 1L . 80 PLUS

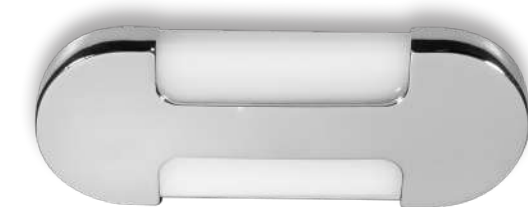

dallas 2L . 80



dallas 2L . 80 PLUS







bedford

1L . 80

1L . 80 PLUS

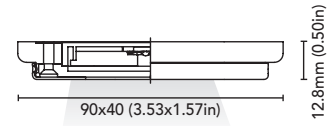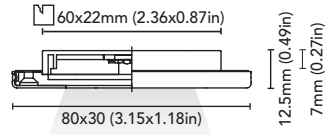

FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	


FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	



bedford 1L . 80




bedford 1L . 80 PLUS

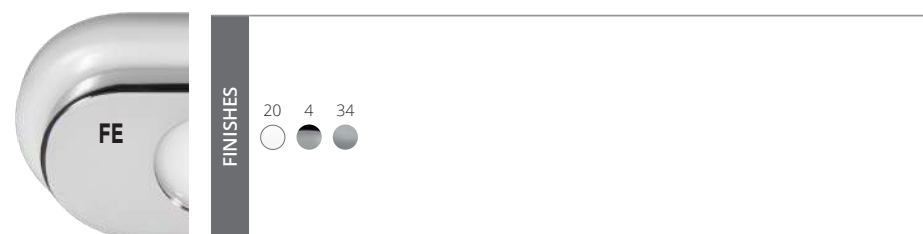




black neonflex

• small



FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	6W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	wide
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN
IP RATE	IP67
WEIGHT	
MATERIALS	PU
MOUNTING SYSTEM	NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED
OPTIONAL LED COLOUR	2700K - 4000K - 6000K - RGB - RGBW
IP RATE	


On request 12Vdc available.

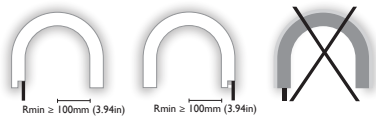



black neonflex

. side




FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	9W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	▲ wide
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN
IP RATE	IP67
WEIGHT	
MATERIALS	PU
MOUNTING SYSTEM	NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED

OPTIONAL LED COLOUR	2700K - 4000K - 6000K - RGB - RGBW
IP RATE	

On request 12Vdc available.




. top



FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	▲ wide
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN
IP RATE	IP67
WEIGHT	
MATERIALS	PU
MOUNTING SYSTEM	NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED

OPTIONAL LED COLOUR	2700K - 4000K - 6000K - RGB - RGBW
IP RATE	

On request 12Vdc available.



bcm
BENEDETTI LIGHTING

Via G. Pastore, 2 - 55041 Capizzano Pianore - Lucca - Italia
tel. +39 0584 969632 - fax +39 0584 969578 - info@bcmilluminazione.com
www.bcmilluminazione.com