



*bcn*  
BENEDETTI LIGHTING

NEW Core&More  
2024

[www.bcmilluminazione.com](http://www.bcmilluminazione.com)



I colori per loro natura sono indicativi, ed eventuali leggere differenze sono da considerarsi nelle tolleranze. La spazzolatura delle finiture dona raffinatezza ai metalli ed è una particolarità che potrebbe variare secondo la tipologia dell'oggetto.

Colours are indicative for their own nature and any slight difference is to be considered within tolerance. Refined brushed finishes may vary according to the kind of item.

## Colori freddi - Cold colours

20  
 bianco  
 white

23  
 nero  
 black

acciaio inox stainless steel	4	nickel lucido polished nickel	10
acciaio inox satinato satin stainless steel	34	nickel satinato v. opaco satin nickel matt p.	39 *
romo lucido polished chrome	3	nickel nero lucido polished black nickel	8 *
romo satinato satin chrome	11	nickel nero satinato v. opaco satin black nickel matt p.	44 *

## Colori caldi - Warm colours

ottone lucido polished brass	19 *
ottone satinato v. opaco satin brass matt p.	49 *
ottone brunito burnished brass	7
ottone brunito v. opaco burnished brass matt p.	37 *
rame lucido polished copper	15 *
rame lucido v. opaco polished copper matt p.	45 *


\* NEW

I colori per loro natura sono indicativi, ed eventuali leggere differenze sono da considerarsi nelle tolleranze. La spazzolatura delle finiture dona raffinatezza ai metalli ed è una particolarità che potrebbe variare secondo la tipologia dell'oggetto.  
 Colours are indicative for their own nature and any slight difference is to be considered within tolerance. Refined brushed finishes may vary according to the kind of item.




# elle fissa

FIXTURE	WALL LAMP
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	MAX 350mA - Driver not included
PROTECTION	
DIMMABLE	YES
BEAM	WIDE
SCREEN	SATIN
LED COLOUR	3000K CRI >90
IP RATE	IP40
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS
OPTIONAL LED COLOUR	2700K, 4000K

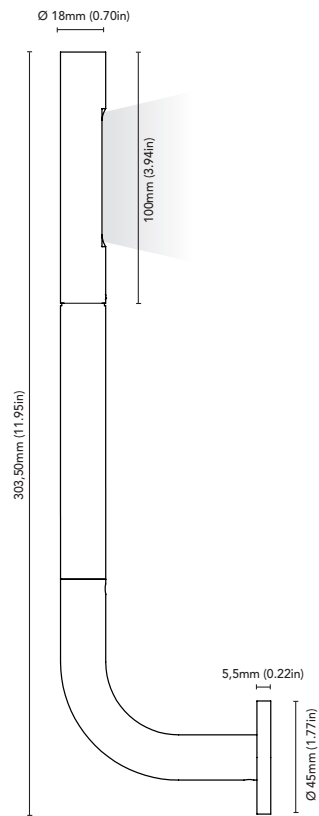


elle fissa

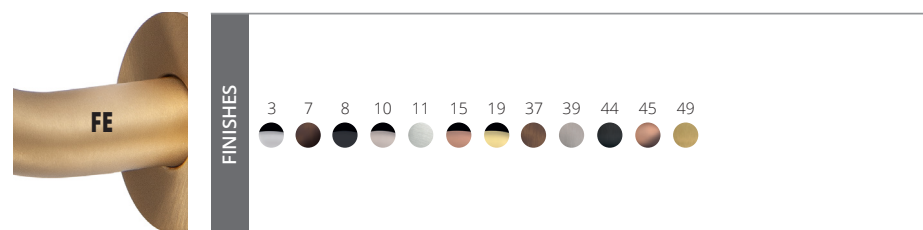




# elle

<b>CODE</b>	<b>2189-N-A2W</b>
<b>FIXTURE</b>	WALL LAMP
<b>ADJUSTABILITY</b>	YES
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 2W
<b>SUPPLY</b>	MAX 350mA - Driver not included
<b>PROTECTION</b>	
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	SATIN
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL LED COLOUR</b>	2700K, 4000K

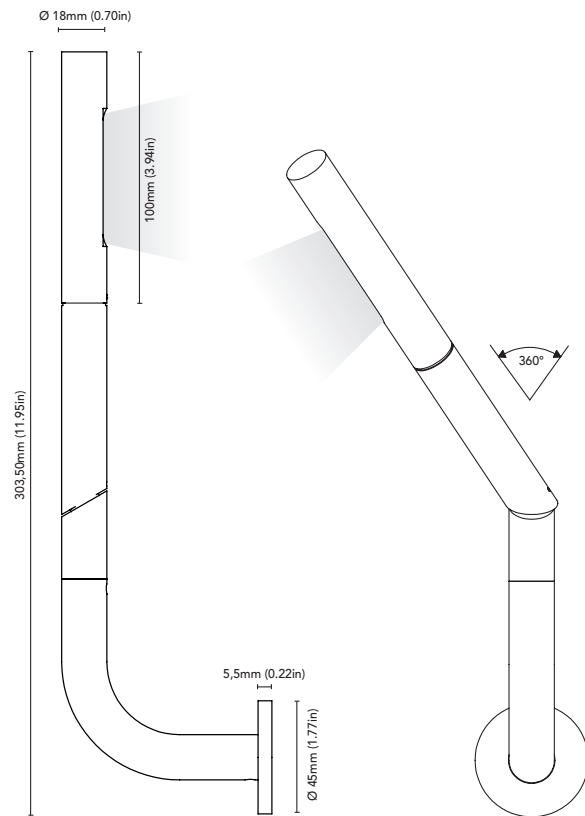


elle

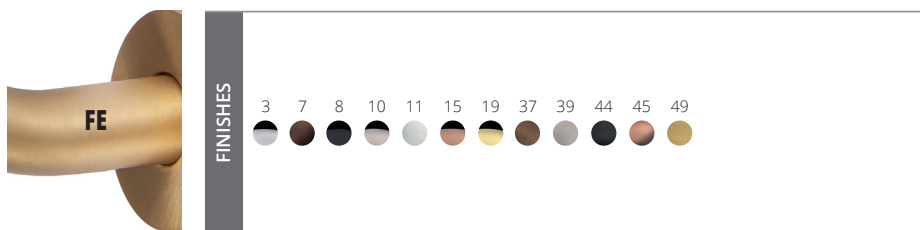




# silos A1

<b>FIXTURE</b>	WALL / READING LAMP
<b>ADJUSTABILITY</b>	YES
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 2W
<b>SUPPLY</b>	16-32 Vdc - Driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL LED COLOUR</b>	2700K, 4000K

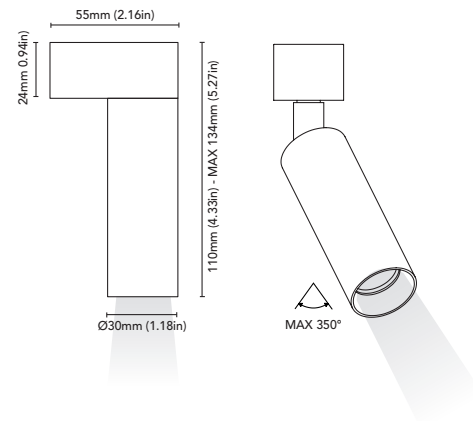


silos A1



**FINISHES**

**FE**


3 7 8 10 11 15 19 37 39 44 45 49






# silof1

<b>FIXTURE</b>	WALL LAMP
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 2W
<b>SUPPLY</b>	16-32 Vdc - Driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL LED COLOUR</b>	2700K, 4000K




silof1

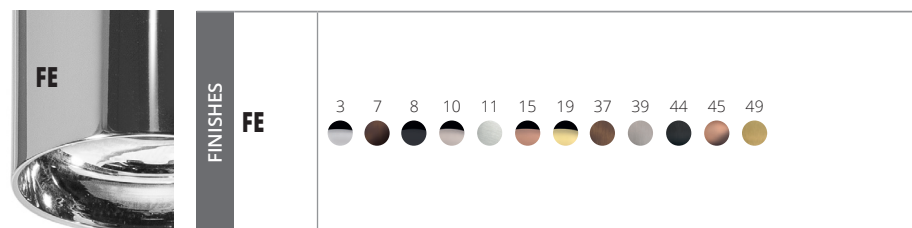



# silO R

<b>CODE</b>	<b>2194-I-Z2W-B</b>
<b>FIXTURE</b>	READING LAMP
<b>ADJUSTABILITY</b>	YES
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 2W
<b>SUPPLY</b>	16-32 Vdc - Driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL LED COLOUR</b>	2700K, 4000K

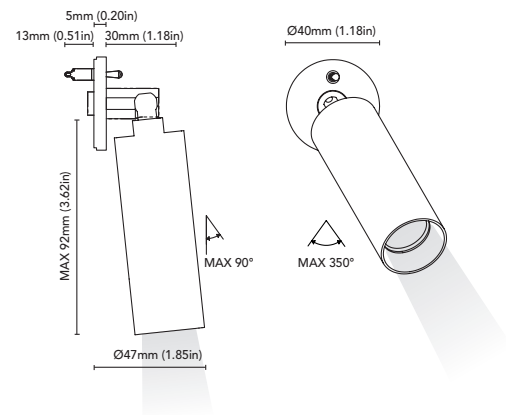


silO R



FINISHES


FE






# silos AF1

<b>FIXTURE</b>	WALL / READING LAMP
<b>ADJUSTABILITY</b>	YES
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 2 x 2W
<b>SUPPLY</b>	16-32 Vdc - Driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL LED COLOUR</b>	2700K, 4000K

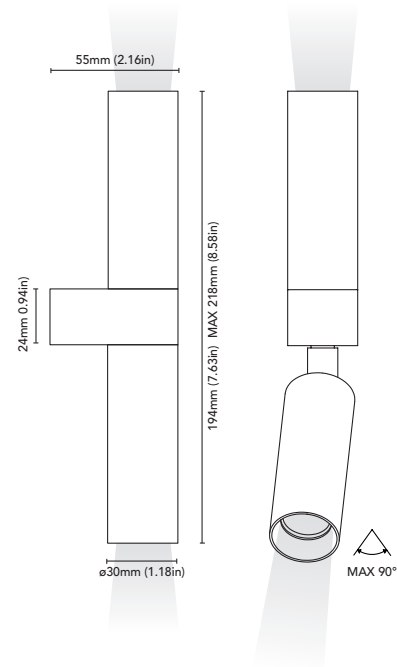


silos A2



**FINISHES**

**FE**

3 7 8 10 11 15 19 37 39 44 45 49









# silos A2

<b>FIXTURE</b>	WALL / READING LAMP
<b>ADJUSTABILITY</b>	YES
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 2 x 2W
<b>SUPPLY</b>	16-32 Vdc - Driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL LED COLOUR</b>	2700K, 4000K

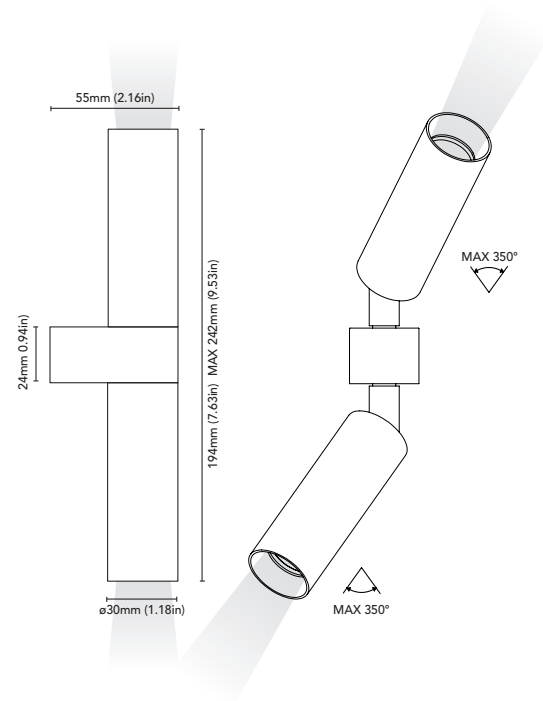


silos A2

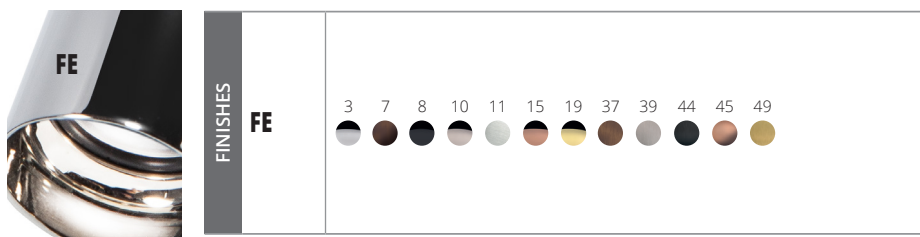




# silos F2

<b>FIXTURE</b>	WALL LAMP
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	POWER LED
<b>POWER</b>	MAX 2 x 2W
<b>SUPPLY</b>	16-32 Vdc - Driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	LENS
<b>LED COLOUR</b>	3000K CRI >90
<b>IP RATE</b>	IP40
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL LED COLOUR</b>	2700K, 4000K

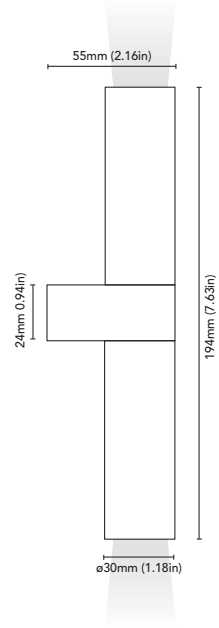


silos F2

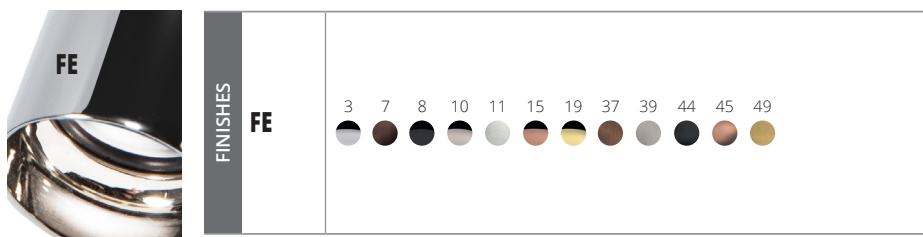



# janis

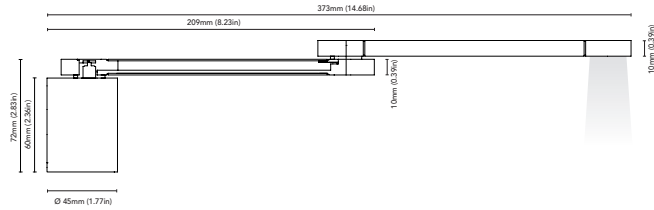


<b>FIXTURE</b>	READING LAMP
<b>ADJUSTABILITY</b>	YES
<b>LIGHT SOURCE</b>	COB LED
<b>POWER</b>	MAX 2W
<b>SUPPLY</b>	16-32 Vdc - Driver on board
<b>PROTECTION</b>	FUSE - POLARITY REVERSE SPIKE FILTER
<b>DIMMABLE</b>	YES
<b>BEAM</b>	WIDE
<b>SCREEN</b>	OPAL
<b>LED COLOUR</b>	3000K CRI >90 LMN 1mt 2mt 3mt
<b>IP RATE</b>	IP40
<b>MATERIALS</b>	BODY: BRASS
<b>MOUNTING SYSTEM</b>	SCREWS
<b>OPTIONAL LED COLOUR</b>	2700K, 4000K



"BUILT-IN USB-C PORT"


janis

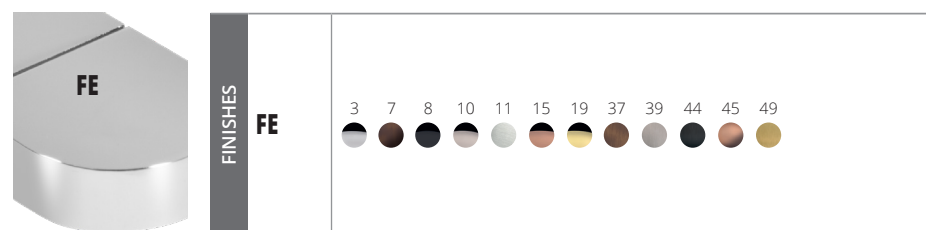




# alpha


. 30




. 45



. 60

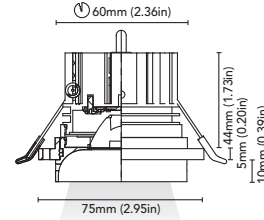

. 75

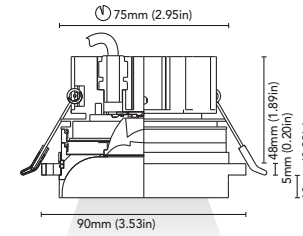

alpha . 30



alpha . 75

CODE	<b>3530-30-E3W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	COB LED
POWER	MAX 3W
SUPPLY	MAX 150mA - Driver not included
PROTECTION	
DIMMABLE	YES
BEAM	NRW - WIDE
SCREEN	LENS + FILM
LED COLOUR	3000K CRI >95 LMN 170lm 1mt 2mt 3mt
IP RATE	IP65
MATERIALS	BODY: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS + DEPTH CONTROL RING
OPTIONAL LED COLOUR	2700K, 4000K

CODE	<b>3530-45-E4.5W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	COB LED
POWER	MAX 4.5W
SUPPLY	MAX 250mA - Driver not included
PROTECTION	
DIMMABLE	YES
BEAM	NRW - MED - WIDE
SCREEN	LENS + FILM
LED COLOUR	3000K CRI >95 LMN 350lm 1mt 2mt 3mt
IP RATE	IP65
MATERIALS	BODY: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS + DEPTH CONTROL RING
OPTIONAL LED COLOUR	2700K, 4000K

CODE	<b>3530-60-E6W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	COB LED
POWER	MAX 6W
SUPPLY	MAX 350mA - Driver not included
PROTECTION	
DIMMABLE	YES
BEAM	NRW - MED - WIDE
SCREEN	LENS + FILM
LED COLOUR	3000K CRI >95 LMN 440lm 1mt 2mt 3mt
IP RATE	IP65
MATERIALS	BODY: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS + DEPTH CONTROL RING
OPTIONAL LED COLOUR	2700K, 4000K

CODE	<b>3530-75-E7.5W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	COB LED
POWER	MAX 7.5W
SUPPLY	MAX 400mA - Driver not included
PROTECTION	
DIMMABLE	YES
BEAM	NRW - MED - WIDE
SCREEN	LENS + FILM
LED COLOUR	3000K CRI >95 LMN 540lm 1mt 2mt 3mt
IP RATE	IP65
MATERIALS	BODY: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS + DEPTH CONTROL RING
OPTIONAL LED COLOUR	2700K, 4000K




FINISHES	<b>FE-I</b>
	20 <input type="radio"/> 23 <input checked="" type="radio"/>




# omega


. 35




. 50



. 65

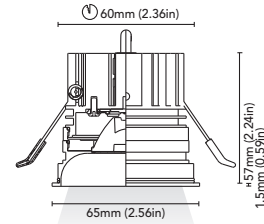

. 80

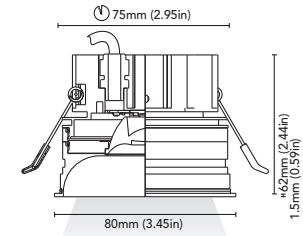

omega . 35




omega . 80

CODE	<b>3531-30-E3W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	COB LED
POWER	MAX 3W
SUPPLY	MAX 150mA - Driver not included
PROTECTION	
DIMMABLE	YES
BEAM	NRW - WIDE
SCREEN	LENS + FILM
LED COLOUR	3000K CRI >95 LMN 170lm 1mt 2mt 3mt
IP RATE	IP65
MATERIALS	BODY: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS + DEPTH CONTROL RING
OPTIONAL LED COLOUR	2700K, 4000K

CODE	<b>3531-45-E4.5W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	COB LED
POWER	MAX 4.5W
SUPPLY	MAX 250mA - Driver not included
PROTECTION	
DIMMABLE	YES
BEAM	NRW - MED - WIDE
SCREEN	LENS + FILM
LED COLOUR	3000K CRI >95 LMN 350lm 1mt 2mt 3mt
IP RATE	IP65
MATERIALS	BODY: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS + DEPTH CONTROL RING
OPTIONAL LED COLOUR	2700K, 4000K

CODE	<b>3531-60-E6W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	COB LED
POWER	MAX 6W
SUPPLY	MAX 350mA - Driver not included
PROTECTION	
DIMMABLE	YES
BEAM	NRW - MED - WIDE
SCREEN	LENS + FILM
LED COLOUR	3000K CRI >95 LMN 440lm 1mt 2mt 3mt
IP RATE	IP65
MATERIALS	BODY: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS + DEPTH CONTROL RING
OPTIONAL LED COLOUR	2700K, 4000K

CODE	<b>3531-75-E7.5W</b>
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	COB LED
POWER	MAX 7.5W
SUPPLY	MAX 400mA - Driver not included
PROTECTION	
DIMMABLE	YES
BEAM	NRW - MED - WIDE
SCREEN	LENS + FILM
LED COLOUR	3000K CRI >95 LMN 540lm 1mt 2mt 3mt
IP RATE	IP65
MATERIALS	BODY: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS + DEPTH CONTROL RING
OPTIONAL LED COLOUR	2700K, 4000K



**FINISHES**


**FE-I**

20 ○ 23 ●



# gamma

## . 45



<b>CODE</b>	<b>3532-45-E4.5W</b>
<b>FIXTURE</b>	FIXED DOWNLIGHT
<b>ADJUSTABILITY</b>	NO
<b>LIGHT SOURCE</b>	COB LED
<b>POWER</b>	MAX 4.5W
<b>SUPPLY</b>	MAX 250mA - Driver not included
<b>PROTECTION</b>	
<b>DIMMABLE</b>	YES
<b>BEAM</b>	NRW - MED - WIDE
<b>SCREEN</b>	LENS + FILM
<b>LED COLOUR</b>	3000K CRI >95 LMN 350lm 1mt 2mt 3mt
<b>IP RATE</b>	IP65
<b>MATERIALS</b>	BODY: ALUMINUM
<b>MOUNTING SYSTEM</b>	WIRE SPRINGS + DEPTH CONTROL RING
<b>OPTIONAL</b>	
<b>LED COLOUR</b>	2700K, 4000K
<b>BEAM</b>	




gamma



<b>FINISHES</b>	<b>FE=I</b>	20 <input type="radio"/>	23 <input checked="" type="radio"/>
-----------------	-------------	--------------------------	-------------------------------------



# orione

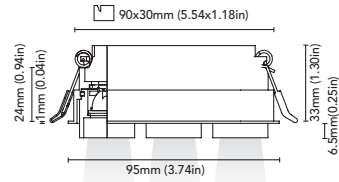

FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 3 X 1.5W
SUPPLY	MAX 500mA - Driver not included
PROTECTION	
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >90
IP RATE	IP40
MATERIALS	MOUNTING BOX: ALUMINUM SPOTS: BRASS
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL LED COLOUR	2700K, 4000K
BEAM	



# orione



FINISHES	R	20 23 3 7 8 10 11 15 19 37 39 44 45 49
	FE-C	23 20 ● ○ Colour 20 on request



*bcml*  
BENEDETTI LIGHTING

Via G. Pastore, 2 - 55041 Capizzano Pianore - Lucca - Italia  
tel. +39 0584 969632 - fax +39 0584 969578 - [info@bcmilluminazione.com](mailto:info@bcmilluminazione.com)  
[www.bcmilluminazione.com](http://www.bcmilluminazione.com)