

bcm
BENEDETTI LIGHTING



NEW
2024

www.bcmilluminazione.com



Colori freddi - Cold colours

20



bianco
white

23



nero
black

4

acciaio inox
stainless steel



34

acciaio inox satinato
satin stainless steel



3

cromo lucido
polished chrome



11

cromo satinato
satin chrome



10

nickel lucido
polished nickel



39

nickel satinato v. opaco
satin nickel matt p.



8

nickel nero lucido
polished black nickel



44

nickel nero satinato v. opaco
satin black nickel matt p.



Colori caldi - Warm colours

19

ottone lucido
polished brass



49

ottone satinato v. opaco
satin brass matt p.



7

ottone brunito
burnished brass



37

ottone brunito v. opaco
burnished brass matt p.



15

rame lucido
polished copper



45

rame lucido v. opaco
polished copper matt p.




I colori per loro natura sono indicativi, ed eventuali leggere differenze sono da considerarsi nelle tolleranze. La spazzolatura delle finiture dona raffinatezza ai metalli ed è una particolarità che potrebbe variare secondo la tipologia dell'oggetto.
Colours are indicative for their own nature and any slight difference is to be considered within tolerance. Refined brushed finishes may vary according to the kind of item.

*NEW




cyndi

. 120

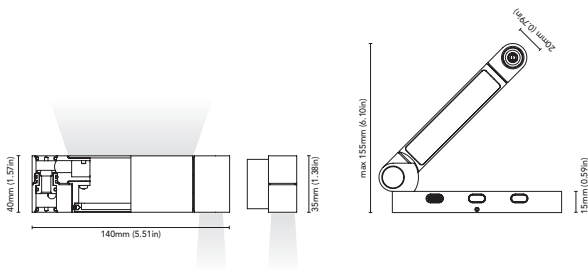

CODE	2202-T-Z1W-B
FIXTURE	READING LAMP
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED + COURTESY LED
POWER	MAX 1W POWER LED, MAX 1W COURTESY LED
SUPPLY	16-32VDC
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	NO
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI 90
IP RATE	IP40
MATERIALS	BRASS
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K, 4000K
BEAM	

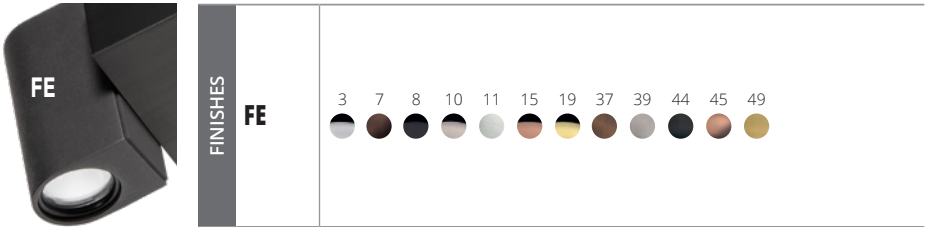


cyndi



shadow

. R




CODE	3538-35-Z2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 VDC - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS + FILM
LED COLOUR	3000K CRI 90
IP RATE	IP65
MATERIALS	BODY: STAINLESS STEEL HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
SWITCH	TOUCH SYSTEM ON THE REFLECTOR
OPTIONAL	
LED COLOUR	2700K, 4000K
BEAM	NARROW, WIDE, TILTED
ACCESSORIES	LID, FILM



shadow . R




with lid

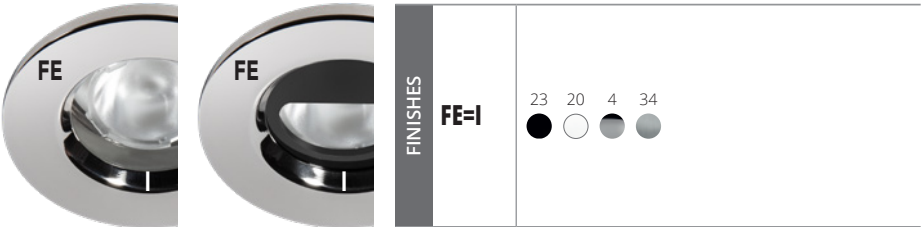



shadow

. Q



CODE	3539-35-Z2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 VDC - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS + FILM
LED COLOUR	3000K CRI 90
IP RATE	IP65
MATERIALS	BODY: STAINLESS STEEL HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K, 4000K
BEAM	NARROW, WIDE, TILTED
ACCESSORIES	LID, FILM



shadow . Q



with lid



FINISHES

FE-I

23

20


4

34




tym track

. 4

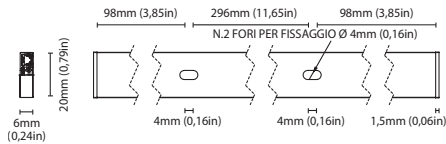

CODE	5460-T4C1MT
FIXTURE	ELECTRIFIED TRACK
MAXIMUM RATED CURRENT AND VOLTAGE	
IP RATE	IP20
WEIGHT	
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	SCREWS

. 5

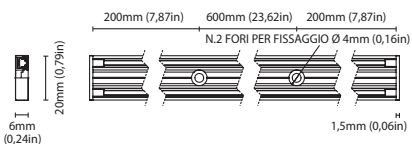


CODE	5460-T5C1MT
FIXTURE	ELECTRIFIED TRACK
MAXIMUM RATED CURRENT AND VOLTAGE	
IP RATE	IP20
WEIGHT	
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	SCREWS

tym track 4



tym track 5



accessori tyn track







walkable neonflex

• side

• top



CODE	5421-1MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	BLACK
LED COLOUR	3000K CRI >90 LMN
IP RATE	IP67
WEIGHT	
MATERIALS	SILICONE
MOUNTING SYSTEM	CLIPS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	

CODE	5420-1MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	BLACK
LED COLOUR	3000K CRI >90 LMN
IP RATE	IP67
WEIGHT	
MATERIALS	SILICONE
MOUNTING SYSTEM	CLIPS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	

On request 12Vdc available.



On request 12Vdc available.







black walkable sp

. side

. top




CODE	5420-1MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP68
WEIGHT	
MATERIALS	PU
MOUNTING SYSTEM	NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED
OPTIONAL LED COLOUR	2700K - 4000K - 6000K - RGB - RGBW
IP RATE	

On request 12Vdc available.




CODE	5420-1MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP68
WEIGHT	
MATERIALS	PU
MOUNTING SYSTEM	NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED
OPTIONAL LED COLOUR	2700K - 4000K - 6000K - RGB - RGBW
IP RATE	

On request 12Vdc available.

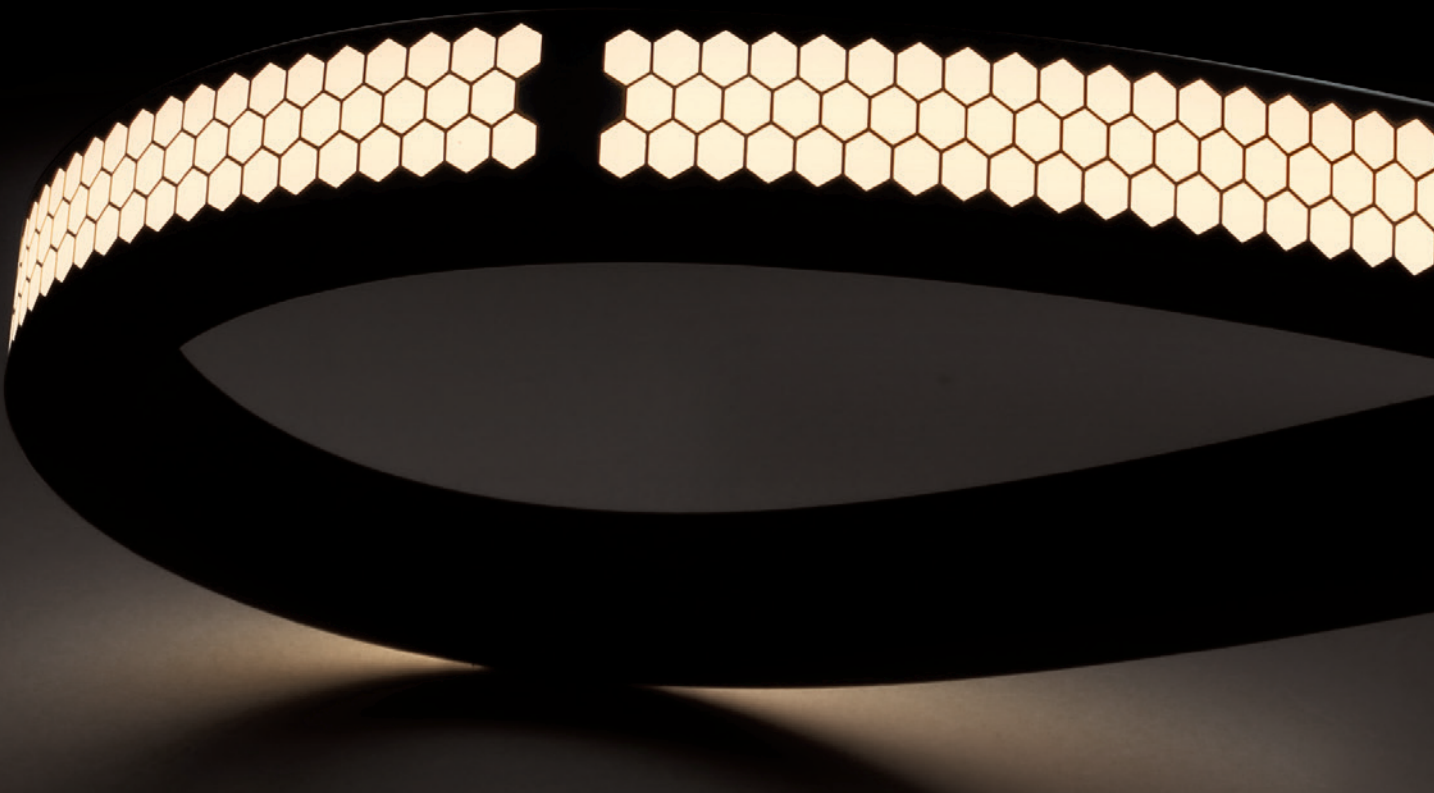

surf plate r

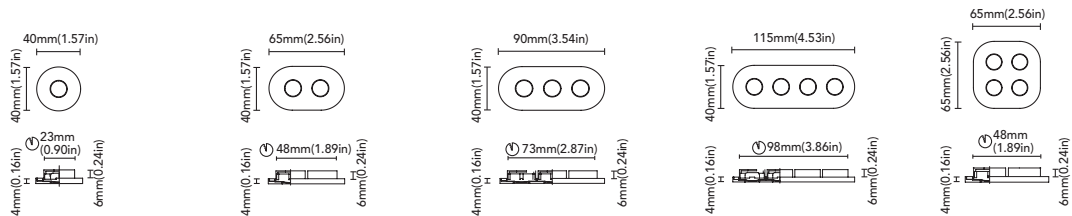

CODE	7050-P001 7050-I001 7050-D001	7050-P002 7050-I002 7050-D002	7050-P003 7050-I003 7050-D003	7050-P004R 7050-I004Q 7050-D004Q	7050-P004Q 7050-I004R 7050-D004R
SUPPLY					
P:PUSH BUTTON	8-32Vdc (backlighting)	8-32Vdc (backlighting)	8-32Vdc (backlighting)	8-32Vdc (backlighting)	8-32Vdc (backlighting)
I:SWITCH	8-32Vdc 3X40W@24Vdc	8-32Vdc 3X40W@24Vdc	8-32Vdc 3X40W@24Vdc	8-32Vdc 3X40W@24Vdc	8-32Vdc 3X40W@24Vdc
D:DIMMERS	8-32Vdc 3X40W@24Vdc	8-32Vdc 3X40W@24Vdc	8-32Vdc 3X40W@24Vdc	8-32Vdc 3X40W@24Vdc	8-32Vdc 3X40W@24Vdc
MATERIALS	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
OPTIONAL					
SUPPLY					
P:PUSH BUTTON	10mA MAX	10mA MAX	10mA MAX	10mA MAX	10mA MAX



surf plate r



FE


FINISHES

FE


23 20 4 34



surf plate q

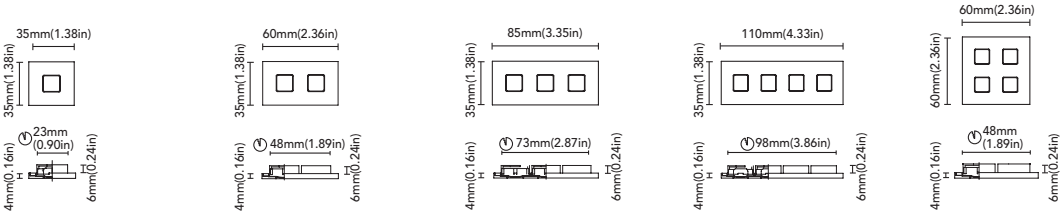

CODE	7051-P001 7051-I001 7051-D001	7050-P002 7050-I002 7050-D002	7050-P003 7050-I003 7050-D003	7050-P004R 7050-I004Q 7050-D004Q	7050-P004Q 7050-I004R 7050-D004R
SUPPLY					
P:PUSH BUTTON	8-32Vdc (backlighting)	8-32Vdc (backlighting)	8-32Vdc (backlighting)	8-32Vdc (backlighting)	8-32Vdc (backlighting)
I:SWITCH	8-32Vdc 4X40W@24Vdc	8-32Vdc 4X40W@24Vdc	8-32Vdc 4X40W@24Vdc	8-32Vdc 4X40W@24Vdc	8-32Vdc 4X40W@24Vdc
D:DIMMERS	8-32Vdc 4X40W@24Vdc	8-32Vdc 4X40W@24Vdc	8-32Vdc 4X40W@24Vdc	8-32Vdc 4X40W@24Vdc	8-32Vdc 4X40W@24Vdc
MATERIALS	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
OPTIONAL					
SUPPLY					
P:PUSH BUTTON	10mA MAX	10mA MAX	10mA MAX	10mA MAX	10mA MAX



surf plate q

FINISHES


FE

23 20 4 34



sablier

CODE	4512-I-B8W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 8W
SUPPLY	5V USB CHARGER
PROTECTION	FUSE - POLARITY REVERSE
DIMMABLE	NO
BEAM	WIDE
SCREEN	GLASS
LED COLOUR	3000K CRI 90
IP RATE	IP40
MATERIALS	STAINLESS STEEL
MOUNTING SYSTEM	SCREWS (FOR CHARGER BASE)
OPTIONAL	
LED COLOUR	2700K, 4000K
BEAM	

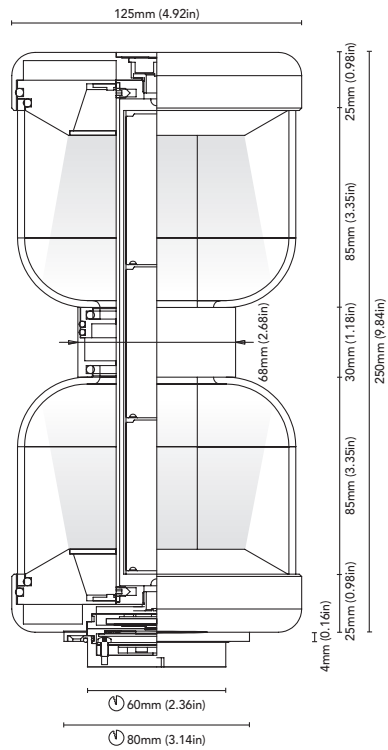

sablier




	FINISHES	FE												
			3	7	8	10	11	15	19	37	39	44	45	49



enne elle

CODE	4513-I-B8W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 8W
SUPPLY	5V USB CHARGER
PROTECTION	FUSE - POLARITY REVERSE
DIMMABLE	NO
BEAM	WIDE
SCREEN	GLASS
LED COLOUR	3000K CRI 90
IP RATE	IP40
MATERIALS	STAINLESS STEEL
MOUNTING SYSTEM	SCREWS (FOR CHARGER BASE)
OPTIONAL	
LED COLOUR	2700K, 4000K
BEAM	

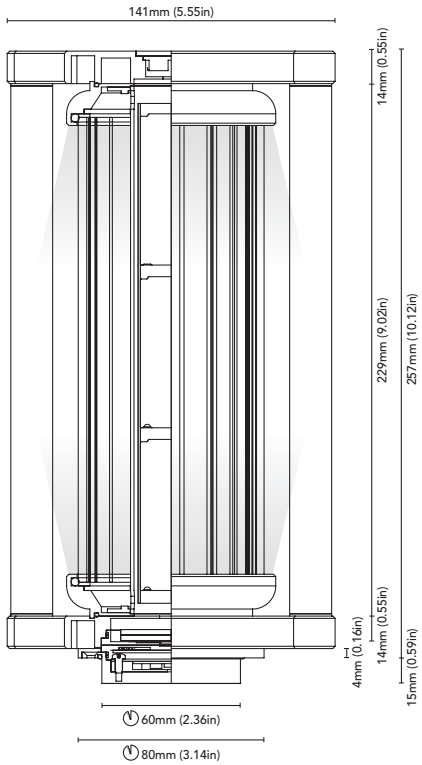

enne elle



FINISHES	FE	3 7 8 10 11 15 19 37 39 44 45 49
----------	----	----------------------------------



Via G. Pastore, 2 - 55041 Capezzano Pianore - Lucca - Italia
tel. +39 0584 969632 - fax +39 0584 969578
info@bcmilluminazione.com - www.bcmilluminazione.com

