



3 x M8 (5/16")




3 x M10 (3/8")



3 x M12 (1/2")



3 x M12 (1/2")*

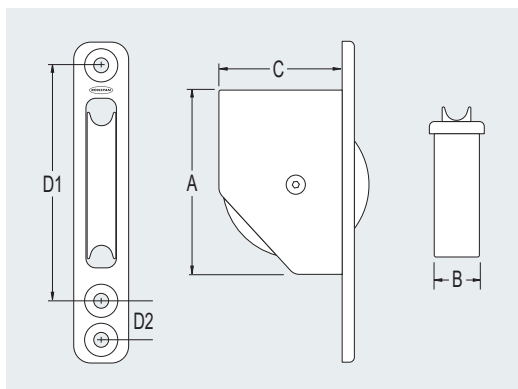

- ✓ Exceptionally high strength to weight ratio and dynamic and static load ratings.
- ⬆ Exit Blocks are ideal for running halyards (and other lines) through spars with minimal friction and chafing.

- ⚙ Sheaves: Anodised aluminium alloy.
- ⚙ Housings: Hard anodised aluminium alloy.
- ⚙ Bearing: Proprietary self-lubricating composite.

- ⚙ Thrust bearings: Acetal ball bearings.
- ⚙ Hub: Grade 316 Stainless Steel.

PRODUCT No.	SHEAVE DIAM. mm	MAX. ROPE mm	A mm	B mm	C mm	D1 mm	D2 mm	M.W.L. kg	B.L. kg	WEIGHT g	SHEAVE DIAM. in	MAX. ROPE in	A in	B in	C in	D1 in	D2 in	M.W.L. lb	B.L. lb	WEIGHT oz
Exit Blocks																				
RF85711A	80	14	103	28	66	135	25	3000	6000	410	3 1/8	9/16	4 1/16	1 1/8	2 5/8	5 5/16	1	6610	13230	14.5
RF105711A	100	16	126	31	84	166	28	4500	9000	660	3 15/16	5/8	4 15/16	1 1/4	3 5/16	6 9/16	1 1/8	9920	19840	23.3
RF125711A	120	18	151	37	101	193	32	7000	14000	1130	4 3/4	11/16	5 5/16	1 7/16	4	7 5/8	1 1/4	15430	30860	39.9
RF145711A	140	20	174	39	116	216	32	9000	18000	1600	5 1/2	13/16	6 7/8	1 9/16	4 9/16	8 1/2	1 1/4	19850	39700	56.4

* High tensile Stainless Steel fasteners Grade A4-80 required to achieve load ratings.