BENEDETTI LIGHTING



Lite & Bright

1959

BENEDETTI LIGHTING

2026

legenda | legend

legenda per articoli a LED
legend for LED items



Caratteristiche generali dell'apparecchio (Vedi simboli grafici nella tabella sottostante)
Fixture general features (See graphic symbols in the table below)

Dimensioni apparecchio
Fixture sizes

3412-60A-B1.5W

Codice commerciale articolo
Commercial item code

SIMBOLI E SEGNI GRAFICI - SYMBOLS AND GRAPHIC SIGNS				
Classe I *Class I*	Classe II *Class II*	Classe III *Class III*	Apparecchio dimmerabile. *Dimmable light fixture.*	Apparecchio predisposto per il montaggio su superfici normalmente infiammabili. Light fitting for application on normally combustible surfaces.

GRADO DI PROTEZIONE IP- INGRESS PROTECTION RATE	
IP 20	IP2- Protezione contro corpi solidi di dimensioni maggiori di 12mm. IP-0 Nessuna protezione contro l'acqua. *IP2-Protection against solid objects larger than 12 mm. IP-0 No protection against water.*
IP 40	IP4-Protezione contro oggetti soldi di dimensioni maggiori di 1mm. IP-0Nessuna protezione contro l'acqua. *IP4-Protection against solid objects larger than 1mm. IP-0 No protection against water.*
IP 65	IP6- Stagno alla polvere. IP-5 Protezione contro getti d'acqua. *IP6- Full protection against dust. IP-5 Protection against jets of water.*
IP 66	IP6- Stagno alla polvere. IP-6 Protezione contro forti getti d'acqua. *IP6- Full protection against dust. IP-6 Protection against powerful jets of water.*
IP 67	IP6- Stagno alla polvere. IP-7 Protezione contro l'immersione temporanea (<30min) fino a 1 metro di profondità. *IP6- Full protection against dust. IP-7 Protection against temporary immersion (<30min) up to 1m in depth.*
IP 68	IP6- Stagno alla polvere. IP-8 Protezione contro l'immersione prolungata (>30min) alla profondità di ... metri. *IP6- Full protection against dust. IP-8 Protection against continuous immersion in water (>30min) at a depth of ... meters.*

INDICE DI PROTEZIONE DAGLI IMPATTI IK - IMPACT PROTECTION RATE IK		
IK 9	Protezione contro un impatto da 10 Joule, equivalente alla caduta di un oggetto di 5kg da 20 centimetri di altezza. *Protection against a 10 joules impact, equivalent to impact of 5 kg mass dropped from a height of 20 cm.*	IK09-10 Walkable
IK 10	Protezione contro un impatto da 20 Joule, equivalente alla caduta di un oggetto di 5kg da 40 centimetri di altezza. *Protection against a 20 joules impact, equivalent to impact of 5 kg mass dropped from a height of 40 cm.*	

Tutti gli apparecchi di illuminazione presenti in questo catalogo sono costruiti in conformità alle Normative Europee EN 60598-1 e 60598-2-.. ed equivalenti alle Norme Internazionali IEC 60598-1 e 60598-2-...L'azienda garantisce che i prodotti sono conformi ai requisiti essenziali delle seguenti Direttive Europee UE-CE:
DBT 2014/35/UE (Direttiva Bassa Tensione);
EMC 2014/30/UE (Compatibilità Elettromagnetica);
RoHS 2002/95/CE (Restrizioni sull'uso di sostanze pericolose);
RAEE 96/02/CE (L'azienda salvaguarda l'ambiente aderendo ad un Consorzio),
ErP 2009/125/CE (Etichetta Energetica).

Dichiarazione etica: per la ns. produzione non utilizziamo bambini e contribuiamo alla salvaguardia dell'ambiente. Dichiarazione di Origine del prodotto: in conformità al Regolamento 1207/01/CE (mod. Reg. 1617/2006, Reg. 75/2008).

Every lighting fixture contained in this catalogue is produced inside the firm, in compliance with the European Standard EN 60598-1 and 60598-2... and equivalent to the International Standard IEC 60598-1 and 60598-2-...The company declares that products comply with the essential requirements of the following European Directives CE:
***LVD 2014/35/EU** (Low Voltage Directive);*
***EMC 2014/30/EU** (Electromagnetic Compatibility);*
***RoHS 2002/95/CE** (Restrictions on the use of Hazardous Substances);*
***RAEE 96/02/CE** (The company protects the environment supporting a Pool);*
***ErP 2009/ 125/EU** (Energy Label).*

Ethics statement: for our production we don't use children and contribute to the protection of the environment. Declaration of Origin of the product: according to Regulation 1207/01/CE (mod. Reg. 1617/2006, Reg. 75/2008).

finiture | finishes



23
nero
black

20
bianco
white

4
acciaio lucido
polished stainless steel

34
acciaio satinato
satin steel

3
cromo lucido
polished chrome

I colori per loro natura sono indicativi, ed eventuali leggere differenze sono da considerarsi nelle tolleranze. La spazzolatura delle finiture dona raffinatezza ai metalli ed è una particolarità che potrebbe variare secondo la tipologia dell'oggetto.
Colours are indicative for their own nature and any slight difference is to be considered within tolerance. Refined brushed finishes may vary according to the kind of item.

Downlights - **14**

						
vegas 1 **16**	**vegas 2** **18**	**memphis 1** **20**	**ocean** **22**	**ring** **24**	**malibù** **24 - 29**	**newport** **30 - 33**

						
orlando **34**	**phoenix** **36**	**seattle** **38 - 41**	**atlanta** **42 - 45**	**charlotte** **46**	**daytona** **48**	**venice** **50 - 53**

			
miami **54**	**colorado** **56**	**aspen** **58**	**alabama** **60**

Courtesy Lights - **62**

						
dallas **64 - 66**	**bedford** **68**	**savannah** **70**	**tampa** **72**	**sarasota** **72**	**florida** **74**	**portland** **76**

Courtesy Lights - **62**



columbia
78



nevada
78



dana
80



baltimora
80



detroit
82



boston
82

Reading Lights - **84**



catalina
86



ventura
88 - 91



arizona
92 - 95



philly
96 - 99

Neonflex - **100**



ik 0606
102



ik 1010
104



ik 1617
106



duneflex
108

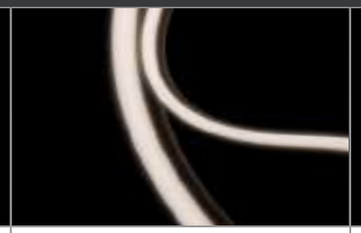

round smooth
112



round knit
114



neonflex 1010
116



neonflex 0606 side
118



neonflex 0606 top
118

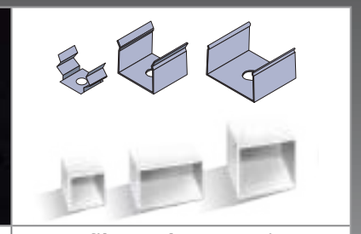

profiles and accessories neonflex
120 - 123

Linear Lighting Systems - **124**

	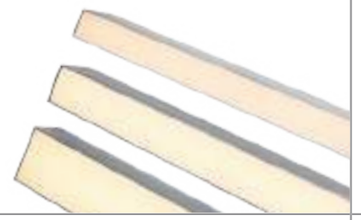				
mini blade one, two, three **126**	**blade one** **128**	**blade two** **130**	**blade three** **132**	**blade four** **134**	**blade five** **136**

	
miniflex **138**	**flex** **140**

Anti-glare - **142**

					
malibù ag **144**	**newport ag** **146**	**orlando ag** **148**	**phoenix ag** **150**	**seattle ag** **152**	**atlanta ag** **154**

					
charlotte ag **156**	**daytona ag** **158**	**alabama ag** **160**	**tampa ag** **162**	**sarasota ag** **162**	**black** **164**

Anti-glare - **142**



blade three black
166



mini blade black
168

Track system - **170**



tym track 4
172

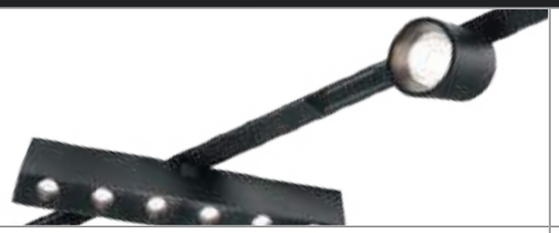

tym track 5
174



tym glow
176



tym ray
178



tym dart
180



tym glow 2
182



tym ray 2
184



accessories tym track 4-5
186



tym track 6
188



tym track 8
190



tym ray r
192



tym glow r
194



tym ray adj
196



tym glow adj
198



tym dart r
200



tym track 9
202



tym mini glow
204



tym mini ray
206



tym mini dart
208



accessories tym track 6-8-9
210

Index

CAPITOLO - CHAPTER		PAGINA - PAGE
	Downlights	14
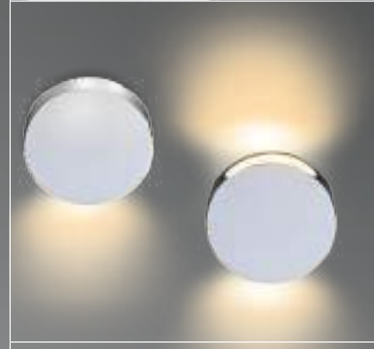	Courtesy Lights	62
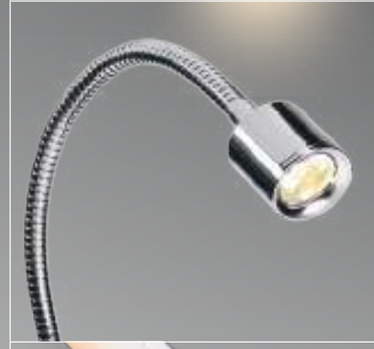	Reading Lights	84
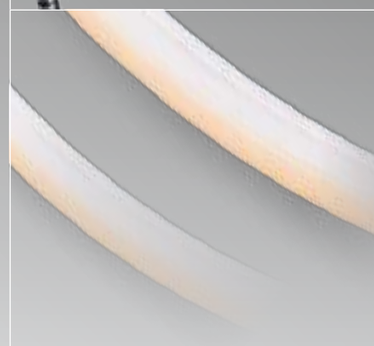	Neonflex	100
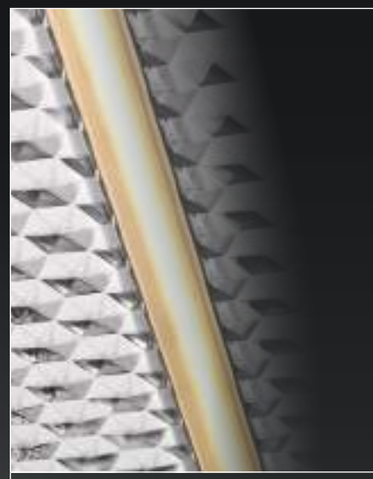	Linear Lighting Systems	124
	Anti-glare	142
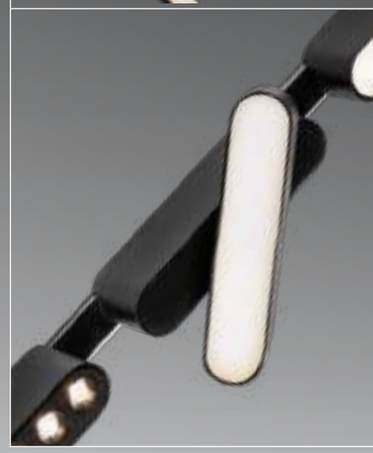	Track system	170



Downlights

Questa linea di faretti si distingue per l'eccellenza dei materiali impiegati e l'alta efficienza luminosa. Tutti gli articoli, orientabili compresi, hanno grado di protezione IP66. L'elegante design si integra perfettamente negli ambienti esterni ed interni. Il corpo stampato in special compound rende i prodotti estremamente versatili, ultraleggeri e compatibili con diversi tipi di superficie.

The downlights of this collection stand up for the excellence of the materials and the high efficiency of the light output. All the articles, adjustable included, are IP66 protection rate. The elegant design is perfectly suitable with both interior and exterior environments. The back-body, made of a special compound, make all the downlights ultra-light and compatible with different types of surfaces.

vegas 1

. 50



CODE	**3552**-50-P4.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4,5W
SUPPLY	16-32Vdc - wired driver
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 414lm **1mt** 1828lx **2mt** 457lx **3mt** 203 lx
IP RATE	IP65
MATERIALS	BODY: ALUMINIUM HEATSINK: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K

. 65



3552-65-P6W
FIXED DOWNLIGHT
NO
POWER LED
MAX 6W
16-32Vdc - wired driver
FUSE - POLARITY REVERSE SPIKE FILTER
YES
MEDIUM
LENS
3000K **CRI** >90 **LMN** 615lm **1mt** 3055lx **2mt** 764lx **3mt** 339lx
IP65
BODY: ALUMINIUM HEATSINK: ALUMINUM
WIRE SPRINGS
2700K - 4000K



FINISHES		
	FE	23 20 3
	I	23



vegas 1 . 50



vegas 1 . 65

vegas 2

. 65



CODE	**3553**-65-P6W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	16-32Vdc - wired driver
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 623lm **1mt** 2709lx **2mt** 677lx **3mt** 301lx
IP RATE	IP20
MATERIALS	BODY: ALUMINIUM HEATSINK: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K



vegas 2 . 65



FINISHES		
	FE	23 20 3
	R	23

memphis 1

. 50



. 65



CODE	**3551**-50-P4.5W	**3551**-65-P6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO
LIGHT SOURCE	POWER LED	POWER LED
POWER	MAX 4,5W	MAX 6W
SUPPLY	16-32Vdc - wired driver	16-32Vdc - wired driver
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	MEDIUM	MEDIUM
SCREEN	LENS	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 435lm **1mt** 1919lx **2mt** 480lx **3mt** 213lx	**3000K** **CRI** >90 **LMN** 645lm **1mt** 4879lx **2mt** 1220lx **3mt** 542lx
IP RATE	IP65	IP65
MATERIALS	BODY: ALUMINIUM HEATSINK: ALUMINUM	BODY: ALUMINIUM HEATSINK: ALUMINUM
MOUNTING SYSTEM	WIRE SPRINGS	WIRE SPRINGS
OPTIONAL		
LED COLOUR	2700K - 4000K	2700K - 4000K



FINISHES		
FE	23 ● 20 ○ 3 ◒	



memphis 1 . 50



memphis 1 . 65

ocean

. 105



. 130



. 155



. 210



CODE	**3479**-105A-B8W **3479**-105C-B8W	**3479**-130A-B10W **3479**-130C-B10W	**3479**-155A-B12W **3479**-155C-B12W	**3479**-210A-B18W **3479**-210C-B18W
FIXTURE	FIXED CEILING LAMP	FIXED CEILING LAMP	FIXED CEILING LAMP	FIXED CEILING LAMP
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	LED	LED	LED	LED
POWER	MAX 8W	MAX 10W	MAX 12W	MAX 18W
SUPPLY	16-32 Vdc	16-32 Vdc	16-32 Vdc	16-32 Vdc
PROTECTION	POLARITY REVERSE	POLARITY REVERSE	POLARITY REVERSE	POLARITY REVERSE
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	OPAL	OPAL	OPAL	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 423lm **1mt** 154lx **2mt** 38lx **3mt** 17lx	**3000K** **CRI** >90 **LMN** 523lm **1mt** 190lx **2mt** 48lx **3mt** 21lx	**3000K** **CRI** >90 **LMN** 665lm **1mt** 242lx **2mt** 61lx **3mt** 27lx	**3000K** **CRI** >90 **LMN** 1142lm **1mt** 416lx **2mt** 104lx **3mt** 46lx
IP RATE	IP66	IP66	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL				
LED COLOUR	2700K - 4000K	2700K - 4000K	2700K - 4000K	2700K - 4000K



NEW SCREEN FOR IMPROVED WEATHER RESISTANCE

ocean - 105, 130, 155, 210



FINISHES

FE

23 20 4 34

ring

CODE	**9000**-RING130 X OCEAN 105 **9000**-RING155 X OCEAN 130 **9000**-RING180 X OCEAN 155 **9000**-RING235 X OCEAN 210
FIXTURE	FRAME FOR OCEAN SERIES
MATERIALS	STAINLESS STEEL AISI 316
MOUNTING SYSTEM	SCREWS

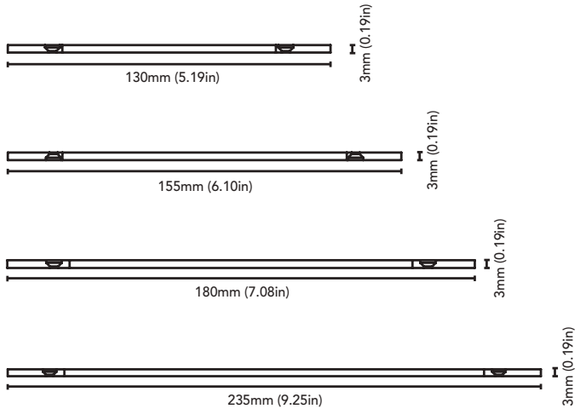



ring - 130, 155, 180, 235



FINISHES	FE	23 20 4 34



ocean - 105 frame ring - 130

malibù

. 60



CODE	**3412**-60A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 109lm **1mt** 46lx **2mt** 12lx **3mt** 5lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE

. 75



CODE	**3412**-75A-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 191lm **1mt** 77lx **2mt** 19x **3mt** 9x
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)

. 85



CODE	**3412**-85A-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 330lm **1mt** 143lx **2mt** 36lx **3mt** 16lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)

. 95



CODE	**3412**-95A-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 399lm **1mt** 178lx **2mt** 45lx **3mt** 20lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)



malibù - 60, 75, 85, 95



FINISHES **FE**

23 20 4 34

malibù r

. 60



CODE	**3546**-60A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 109lm **1mt** 46lx **2mt** 12lx **3mt** 5lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE

. 75



CODE	**3546**-75A-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 191lm **1mt** 77lx **2mt** 19x **3mt** 9x
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)

. 85



CODE	**3546**-85A-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 330lm **1mt** 143lx **2mt** 36lx **3mt** 16lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)

. 95



CODE	**3546**-95A-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 399lm **1mt** 178lx **2mt** 45lx **3mt** 20lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)

NEW UNSCREWABLE FLANGE ENABLING EASY REPLACEMENT AND CHANGE OF APPEARANCE



malibù r - 60, 75, 85, 95



FINISHES **FE**

23 20 4 34

newport

. 85



. 95



CODE	**3414**-85A-B2W	**3414**-95A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	28°	32°
LIGHT SOURCE	POWER LED	POWER LED
POWER	MAX 2W	MAX 4W
SUPPLY	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	OPAL	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 191lm **1mt** 77lx **2mt** 19x **3mt** 9x	**3000K** **CRI** >90 **LMN** 330lm **1mt** 143lx **2mt** 36lx **3mt** 16lx
IP RATE	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS	WIRE SPRINGS
OPTIONAL		
LED COLOUR	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)



FINISHES **R=FE**

23 20 4 34



newport - 85, 95

newport r

. 85



. 95



CODE	**3547**-85A-B2W	**3547**-95A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	28°	32°
LIGHT SOURCE	POWER LED	POWER LED
POWER	MAX 2W	MAX 4W
SUPPLY	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	OPAL	OPAL
LED COLOUR	3000K CRI >90 LMN 191lm 1mt 77lx 2mt 19x 3mt 9x	3000K CRI >90 LMN 330lm 1mt 143lx 2mt 36lx 3mt 16lx
IP RATE	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS	WIRE SPRINGS
OPTIONAL		
LED COLOUR	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)



FINISHES **R=FE**

23 20 4 34

NEW UNSCREWABLE FLANGE ENABLING EASY REPLACEMENT AND CHANGE OF APPEARANCE



newport r - 85, 95

orlando

. 60



. 75



. 85



. 95



CODE	**3406**-60A-B1.5W **3406**-60C-B1.5W	**3406**-75A-B2W **3406**-75C-B2W	**3406**-85A-B4W **3406**-85C-B4W	**3406**-95A-B6W **3406**-95C-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	OPAL	OPAL	OPAL	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 109lm **1mt** 46lx **2mt** 12lx **3mt** 5lx	3000K **CRI** >90 **LMN** 191lm **1mt** 77lx **2mt** 19x **3mt** 9x	3000K **CRI** >90 **LMN** 330lm **1mt** 143lx **2mt** 36lx **3mt** 16lx	3000K **CRI** >90 **LMN** 399lm **1mt** 178lx **2mt** 45lx **3mt** 20lx
IP RATE	IP66	IP66	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL				
SWITCH ON THE FRAME		AVAILABLE	AVAILABLE	AVAILABLE
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)



orlando - 60, 75, 85, 95



FINISHES **FE**

23 20 4 34

switch on the frame



phoenix

. 85



CODE	**3408**-85A-B2W **3408**-85C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	28°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN 191lm 1mt 77lx 2mt 19x 3mt 9x
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
SWITCH ON THE FRAME	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)

. 95



CODE	**3408**-95A-B4W **3408**-95C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	32°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN 330lm 1mt 143lx 2mt 36lx 3mt 16lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
SWITCH ON THE FRAME	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)



phoenix - 85, 95



FINISHES **FE=R**

23 20 4 34

switch on the frame



seattle

. 55



. 70



. 80



. 90



CODE	**3413**-55A-B1.5W	**3413**-70A-B2W	**3413**-80A-B4W	**3413**-90A-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	OPAL	OPAL	OPAL	OPAL
LED COLOUR	3000K CRI >90 LMN 109lm 1mt 46lx 2mt 12lx 3mt 5lx	3000K CRI >90 LMN 191lm 1mt 77lx 2mt 19x 3mt 9x	3000K CRI >90 LMN 330lm 1mt 143lx 2mt 36lx 3mt 16lx	3000K CRI >90 LMN 399lm 1mt 178lx 2mt 45lx 3mt 20lx
IP RATE	IP66	IP66	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS	WIRE SPRINGS	WIRE SPRINGS	WIRE SPRINGS
OPTIONAL				
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)



seattle - 55, 70, 80, 90



FINISHES **FE**

23 20 4 34

seattle r

. 55



. 70



. 80



. 90



CODE	**3549**-55A-B1.5W	**3549**-70A-B2W	**3549**-80A-B4W	**3549**-90A-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	OPAL	OPAL	OPAL	OPAL
LED COLOUR	3000K CRI >90 LMN 109lm 1mt 46lx 2mt 12lx 3mt 5lx	3000K CRI >90 LMN 191lm 1mt 77lx 2mt 19x 3mt 9x	3000K CRI >90 LMN 330lm 1mt 143lx 2mt 36lx 3mt 16lx	3000K CRI >90 LMN 399lm 1mt 178lx 2mt 45lx 3mt 20lx
IP RATE	IP66	IP66	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS	WIRE SPRINGS	WIRE SPRINGS	WIRE SPRINGS
OPTIONAL				
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)

NEW UNSCREWABLE FLANGE ENABLING EASY REPLACEMENT AND CHANGE OF APPEARANCE



seattle r - 55, 70, 80, 90



FINISHES **FE**

23 20 4 34

atlanta

. 80



CODE	**3415**-80A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	28°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 191lm **1mt** 77lx **2mt** 19x **3mt** 9x
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)

. 90



CODE	**3415**-90A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	32°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 330lm **1mt** 143lx **2mt** 36lx **3mt** 16lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)



atlanta - 80, 90



FINISHES **R=FE**

23 20 4 34

atlanta r

. 80



CODE	**3550**-80A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	28°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 191lm **1mt** 77lx **2mt** 19x **3mt** 9x
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)

. 90



CODE	**3550**-90A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	32°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 330lm **1mt** 143lx **2mt** 36lx **3mt** 16lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)

NEW UNSCREWABLE FLANGE ENABLING EASY REPLACEMENT AND CHANGE OF APPEARANCE



atlanta r - 80, 90



FINISHES **R=FE**

23 20 4 34

charlotte

. 55



. 70



. 80



. 90



CODE	**3407**-55A-B1.5W **3407**-55C-B1.5W	**3407**-70A-B2W **3407**-70C-B2W	**3407**-80A-B4W **3407**-80C-B4W	**3407**-90A-B6W **3407**-90C-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	OPAL	OPAL	OPAL	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 109lm **1mt** 46lx **2mt** 12lx **3mt** 5lx	3000K **CRI** >90 **LMN** 191lm **1mt** 77lx **2mt** 19x **3mt** 9x	3000K **CRI** >90 **LMN** 330lm **1mt** 143lx **2mt** 36lx **3mt** 16lx	3000K **CRI** >90 **LMN** 399lm **1mt** 178lx **2mt** 45lx **3mt** 20lx
IP RATE	IP66	IP66	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL				
SWITCH ON THE FRAME		AVAILABLE	AVAILABLE	AVAILABLE
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)



charlotte - 55, 70, 80, 90



FINISHES

FE

23 20 4 34

switch on the frame



daytona

. 80



CODE	**3409**-80A-B2W **3409**-80C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	28°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN 191lm 1mt 77lx 2mt 19x 3mt 9x
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
SWITCH ON THE FRAME	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)

. 90



CODE	**3409**-90A-B4W **3409**-90C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	32°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN 330lm 1mt 143lx 2mt 36lx 3mt 16lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
SWITCH ON THE FRAME	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)



daytona - 80, 90



FINISHES **FE=R**

23 20 4 34

switch on the frame



venice

. 55



. 70



. 80



. 90



CODE	**3411**-55A-B1.5W	**3411**-70A-B2W	**3411**-80A-B4W	**3411**-90A-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	OPAL	OPAL	OPAL	OPAL
LED COLOUR	3000K CRI >90 LMN 91lm 1mt 40lx 2mt 10lx 3mt 4lx	3000K CRI >90 LMN 173lm 1mt 75lx 2mt 19lx 3mt 8lx	3000K CRI >90 LMN 269lm 1mt 117lx 2mt 29lx 3mt 13lx	3000K CRI >90 LMN 305lm 1mt 147lx 2mt 37lx 3mt 16lx
IP RATE	IP66	IP66	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS	WIRE SPRINGS	WIRE SPRINGS	WIRE SPRINGS
OPTIONAL				
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)



venice - 55, 70, 80, 90



FINISHES **FE**

23 20 4 34

venice r

. 55



. 70



. 80



. 90



CODE	**3548**-55A-B1.5W	**3548**-70A-B2W	**3548**-80A-B4W	**3548**-90A-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	OPAL	OPAL	OPAL	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 91lm **1mt** 40lx **2mt** 10lx **3mt** 4lx	3000K **CRI** >90 **LMN** 173lm **1mt** 75lx **2mt** 19lx **3mt** 8lx	3000K **CRI** >90 **LMN** 269lm **1mt** 117lx **2mt** 29lx **3mt** 13lx	3000K **CRI** >90 **LMN** 305lm **1mt** 147lx **2mt** 37lx **3mt** 16lx
IP RATE	IP66	IP66	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS	WIRE SPRINGS	WIRE SPRINGS	WIRE SPRINGS
OPTIONAL				
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)

NEW UNSCREWABLE FLANGE ENABLING EASY REPLACEMENT AND CHANGE OF APPEARANCE



venice r - 55, 70, 80, 90



FINISHES **FE**

23 20 4 34

miami

. 55



. 70



. 80



. 90



CODE	**3405**-55A-B1.5W **3405**-55C-B1.5W	**3405**-70A-B2W **3405**-70C-B2W	**3405**-80A-B4W **3405**-80C-B4W	**3405**-90A-B6W **3405**-90C-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	OPAL	OPAL	OPAL	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 91lm **1mt** 40lx **2mt** 10lx **3mt** 4lx	3000K **CRI** >90 **LMN** 173lm **1mt** 75lx **2mt** 19lx **3mt** 8lx	3000K **CRI** >90 **LMN** 269lm **1mt** 117lx **2mt** 29lx **3mt** 13lx	3000K **CRI** >90 **LMN** 305lm **1mt** 147lx **2mt** 37lx **3mt** 16lx
IP RATE	IP66	IP66	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL				
SWITCH ON THE FRAME		AVAILABLE	AVAILABLE	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)



miami - 55, 70, 80, 90



FINISHES **FE**

23 20 4 34

switch on the frame



colorado

. 77



. 87



CODE	**3419**-77A-B2W **3419**-77AS-B2W	**3419**-87A-B4W **3419**-87AS-B4W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO
LIGHT SOURCE	POWER LED	POWER LED
POWER	MAX 2W	MAX 4W
SUPPLY	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	(A) POLISHED (AS) FROSTED	(A) POLISHED (AS) FROSTED
LED COLOUR	3000K CRI >90 LMN 191lm 1mt 77lx 2mt 19x 3mt 9x	3000K CRI >90 LMN 330lm 1mt 143lx 2mt 36lx 3mt 16lx
IP RATE	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS	WIRE SPRINGS
OPTIONAL		
LED COLOUR	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)



FINISHES		
	FE	20



colorado - 77, 87



colorado - 77S, 87S

aspen

. 77



. 87



CODE	**3418**-77A-B2W **3418**-77AS-B2W **3418**-77C-B2W **3418**-77CS-B2W	**3418**-87A-B4W **3418**-87AS-B4W **3418**-87C-B4W **3418**-87CS-B4W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO
LIGHT SOURCE	POWER LED	POWER LED
POWER	MAX 2W	MAX 4W
SUPPLY	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	(A,C) POLISHED (AS,CS) FROSTED	(A,C) POLISHED (AS,CS) FROSTED
LED COLOUR	**3000K** **CRI** >90 **LMN** 191lm **1mt** 77lx **2mt** 19x **3mt** 9x	**3000K** **CRI** >90 **LMN** 330lm **1mt** 143lx **2mt** 36lx **3mt** 16lx
IP RATE	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL		
LED COLOUR	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)



FINISHES		
FE	20	◯



aspen - 77, 87



aspen - 77S, 87S

alabama

. 60



. 75



. 85



. 95



CODE	**3422**-60A-B1.5W **3422**-60C-B1.5W	**3422**-75A-B2W **3422**-75C-B2W	**3422**-85A-B4W **3422**-85C-B4W	**3422**-95A-B6W **3422**-95C-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	OPAL	OPAL	OPAL	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 109lm **1mt** 46lx **2mt** 12lx **3mt** 5lx	3000K **CRI** >90 **LMN** 191lm **1mt** 77lx **2mt** 19x **3mt** 9x	3000K **CRI** >90 **LMN** 330lm **1mt** 143lx **2mt** 36lx **3mt** 16lx	3000K **CRI** >90 **LMN** 399lm **1mt** 178lx **2mt** 45lx **3mt** 20lx
IP RATE	IP66	IP66	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL				
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)



alabama - 60, 75, 85, 95



FINISHES **FE**

23 20 4 34

Courtesy Lights



Courtesy of Fairline Yachts Ltd
Custom version with logo,
on request



Gamma di prodotti ideati per segnapasso, luci di cortesia, etc.
La collezione include anche piccoli "gioielli" per creare innumerevoli effetti luminosi.

Range of products designed for path markers, courtesy lights, etc.
The collection also includes small "jewels" to create many lighting effects.

dallas

1L . 40



CODE	**3477**-40U-1LED
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	MAX 0,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K
	CRI >90
	LMN 4lm
	1mt 1lx
	2mt 0lx
	3mt 0lx
IP RATE	IP66
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB

2L . 40



CODE	**3477**-40G-1LED
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	MAX 0,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K
	CRI >90
	LMN 7lm
	1mt 1lx
	2mt 0lx
	3mt 0lx
IP RATE	IP66
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB





FINISHES **FE**

23 20 4 34



dallas 1L . 40



dallas 2L . 40

dallas

1L . 80



2L . 80



CODE	**3536**-80U-B1.5W	**3536**-80G-B1.5W
FIXTURE	FIXED COURTESY LIGHT	FIXED COURTESY LIGHT
ADJUSTABILITY	NO	NO
LIGHT SOURCE	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 1,5W
SUPPLY	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	OPAL	OPAL
LED COLOUR	3000K CRI >90 LMN 17lm 1mt 6lx 2mt 1lx 3mt 1lx	3000K CRI >90 LMN 30lm 1mt 9lx 2mt 2lx 3mt 1lx
IP RATE	IP66	IP66
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS	SCREWS
OPTIONAL		
OPALINE SPACER	AVAILABLE	AVAILABLE
LED COLOUR	2700K - 4000K - BLUE - RED	2700K - 4000K - BLUE - RED





FINISHES **FE**





dallas 1L . 80



dallas 1L . 80 PLUS



dallas 2L . 80

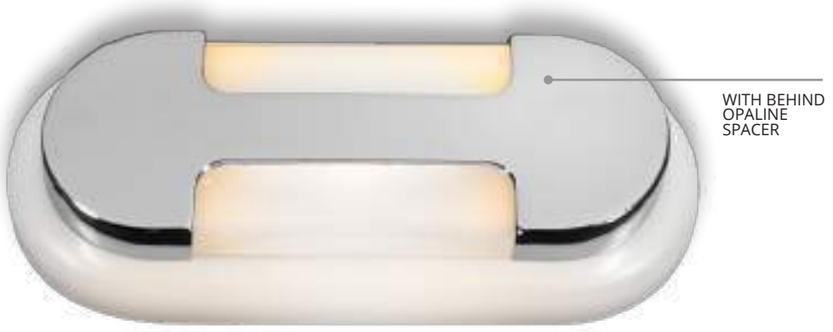

dallas 2L . 80 PLUS

bedford

. 40



. 80



CODE	**3478**-40-1LED	**3537**-80-B1.5W
FIXTURE	FIXED COURTESY LIGHT	FIXED COURTESY LIGHT
ADJUSTABILITY	NO	NO
LIGHT SOURCE	LED	POWER LED
POWER	MAX 0,5W	MAX 1,5W
SUPPLY	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	OPAL	OPAL
LED COLOUR	3000K CRI >90 LMN 10lm 1mt 3lx 2mt 1lx 3mt 0lx	3000K CRI >90 LMN 60lm 1mt 22lx 2mt 5lx 3mt 2lx
IP RATE	IP66	IP66
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS	SCREWS
OPTIONAL		
OPALINE SPACER		AVAILABLE
LED COLOUR	2700K - 4000K - BLUE - RED - RGB	2700K - 4000K - BLUE - RED



FINISHES **FE**

23 20 4 34



bedford . 40



bedford . 80



bedford . 80 PLUS

savannah

. 40



CODE	**3432**-40-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K
	CRI >90
	LMN 12lm
	1mt 4lx
	2mt 1lx
	3mt 0lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS

OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE



FINISHES **FE**

23 20 4 34



savannah

tampa

. 40



CODE	**3416**-40-Z1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	CLEAR
LED COLOUR	3000K CRI >90 LMN 120lm 1mt 483lx 2mt 121lx 3mt 54lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE



sarasota

. 40



CODE	**3417**-40-Z1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	CLEAR
LED COLOUR	3000K CRI >90 LMN 120lm 1mt 483lx 2mt 121lx 3mt 54lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE







FINISHES **FE**

23 20 4 34



tampa



sarasota

florida

1L . 40

2L . 40





CODE	**3420**-40U-B1.5W	**3420**-40G-B1.5W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO
LIGHT SOURCE	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 1,5W
SUPPLY	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	FROSTED	FROSTED
LED COLOUR	3000K CRI >90 LMN 1lm 1mt 0lx 2mt 0lx 3mt 0lx	3000K CRI >90 LMN 2lm 1mt 0lx 2mt 0lx 3mt 0lx
IP RATE	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS	BANDED SPRINGS OR SCREWS
OPTIONAL		
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - RED - BLUE



FINISHES **FE**

23 20 4 34



florida 1L florida 2L

portland

1L . 40



CODE	**3421**-40U-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	FROSTED
LED COLOUR	3000K CRI >90 LMN 1lm 1mt 0lx 2mt 0lx 3mt 0lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE

2L . 40



CODE	**3421**-40G-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	FROSTED
LED COLOUR	3000K CRI >90 LMN 2lm 1mt 0lx 2mt 0lx 3mt 0lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE



portland 1L portland 2L



FINISHES **FE**

23 20 4 34

columbia nevada

. 35



CODE	**3452**-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	MAX 0,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN 2lm 1mt 0lx 2mt 0lx 3mt 0lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB



. 35



CODE	**3454**-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	MAX 0,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN 2lm 1mt 0lx 2mt 0lx 3mt 0lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB







FINISHES **FE**

23 20 4 34



columbia



nevada

dana

. 35



CODE	**3453**-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	MAX 0,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K
	CRI >90
	LMN 3lm
	1mt 1lx
	2mt 0lx
	3mt 0lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB



baltimora

. 35



CODE	**3455**-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	MAX 0,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K
	CRI >90
	LMN 3lm
	1mt 1lx
	2mt 0lx
	3mt 0lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB





FINISHES **FE**

23 20 4 34



dana



baltimora

detroit

. 20



CODE	**3450**-20-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	MAX 0,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	CLEAR
LED COLOUR	3000K CRI >90 LMN 8lm 1mt 3lx 2mt 1lx 3mt 0lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316
MOUNTING SYSTEM	PRESSURE BY ORING
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB



boston

. 20



CODE	**3451**-20-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	MAX 0,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	CLEAR
LED COLOUR	3000K CRI >90 LMN 8lm 1mt 3lx 2mt 1lx 3mt 0lx
IP RATE	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316
MOUNTING SYSTEM	PRESSURE BY ORING
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB







FINISHES **FE**

23 20 4 34



detroit



boston

Elementi luce flessibili e direzionabili, da parete o da tavolo,
realizzati per la lettura o illuminazione puntuale.

Flexible and adjustable lighting elements,
for wall or table, for reading or precise illumination.

catalina



CODE	**2182**-I-Z1.5W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 120lm 1mt 483lx 2mt 121lx 3mt 54lx
IP RATE	IP40
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS



OPTIONAL	
LED COLOUR	2700K - 4000K - RED



FINISHES	FE	3

catalina



ventura



CODE	**2184**-I-Z1.5W
FIXTURE	DESK READING LIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 120lm **1mt** 483lx **2mt** 121lx **3mt** 54lx
IP RATE	IP40
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS



OPTIONAL	
LED COLOUR	2700K - 4000K - RED



FINISHES		
	FE	3



ventura

ventura usb



CODE	**2184U**-I-Z1.5W
FIXTURE	DESK READING LIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
USB V OUTPUT	5 Vdc
USB I OUTPUT	MAX 1,5A
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 120lm **1mt** 483lx **2mt** 121lx **3mt** 54lx
IP RATE	IP40
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS



OPTIONAL	
LED COLOUR	2700K - 4000K - RED



FINISHES		
FE		3



ventura usb

arizona



CODE	**2185**-I-Z1.5W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 120lm **1mt** 483lx **2mt** 121lx **3mt** 54lx
IP RATE	IP40
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS



arizona

OPTIONAL	
LED COLOUR	2700K - 4000K - RED



FINISHES		
	FE	3

arizona usb



CODE	**2185U**-I-Z1.5W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
USB V OUTPUT	5 Vdc
USB I OUTPUT	MAX 1,5A
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 120lm **1mt** 483lx **2mt** 121lx **3mt** 54lx
IP RATE	IP40
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS



OPTIONAL	
LED COLOUR	2700K - 4000K - RED



FINISHES		
	FE	3

arizona usb

philly

. 45



CODE	**2186**-I-B3W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN 198lm 1mt 89lx 2mt 22lx 3mt 10lx
IP RATE	IP40
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED



philly



FINISHES	FE	3



philly usb

. 45



CODE	**2186U**-I-B3W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	8-32 Vdc
USB V OUTPUT	5 Vdc
USB I OUTPUT	MAX 1,5A
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	OPAL
LED COLOUR	3000K
	CRI >90
	LMN 198lm
	1mt 89lx
	2mt 22lx
	3mt 10lx
IP RATE	IP40
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED



philly usb



FINISHES **FE** 3



Neonflex

Soluzione flessibile per illuminazione diffusa a LED che consente di creare disegni luminosi lineari e curvi su soffitti, pareti etc, in ambienti interni ed esterni.

Flexible solution for diffused LED lighting, it allows the creation of linear and curve lighting decorations on ceilings, walls. etc. for indoor and outdoor environment.

ik 0606

IK09-10
Walkable

. side



. top



CODE	**5433**-1MT-6WM **5433**-2MT-6WM **5433**-3MT-6WM **5433**-4MT-6WM **5433**-5MT-6WM	**5432**-1MT-6WM **5432**-2MT-6WM **5432**-3MT-6WM **5432**-4MT-6WM **5432**-5MT-6WM
FIXTURE	FLEXIBLE LED	FLEXIBLE LED
BENDING	SIDE	TOP
LIGHT SOURCE	LED	LED
POWER	6W/MT	6W/MT
SUPPLY	24 Vdc	24 Vdc
PROTECTION	POLARITY REVERSE	POLARITY REVERSE
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	OPAL	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 347lm/m **1mt** 118lx **2mt** 30lx **3mt** 13lx	**3000K** **CRI** >90 **LMN** 483lm/m **1mt** 182lx **2mt** 45lx **3mt** 20lx
IP RATE	IP67	IP67
IK RATE	IK9	IK10
MOUNTING SYSTEM	NR. 3 CLIPS/MT	NR. 3 CLIPS/MT
MATERIALS	SPECIAL SILICONE	SPECIAL SILICONE
OPTIONAL		
LED COLOUR	2700K - 4000K	2700K - 4000K

ik 1010

IK09-10
Walkable

. side



CODE	**5436**-1MT-10WM **5436**-2MT-10WM **5436**-3MT-10WM **5436**-4MT-10WM **5436**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	SIDE
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 745 lm/m **1mt** 256lx **2mt** 64lx **3mt** 28lx
IP RATE	IP67
IK RATE	IK9
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SPECIAL SILICONE
OPTIONAL	
LED COLOUR	2700K - 4000K

. top



CODE	**5435**-1MT-10WM **5435**-2MT-10WM **5435**-3MT-10WM **5435**-4MT-10WM **5435**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	TOP
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 817lm/m **1mt** 284lx **2mt** 71lx **3mt** 32lx
IP RATE	IP67
IK RATE	IK10
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SPECIAL SILICONE
OPTIONAL	
LED COLOUR	2700K - 4000K

. 3view



CODE	**5434**-1MT-10WM **5434**-2MT-10WM **5434**-3MT-10WM **5434**-4MT-10WM **5434**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	TOP
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 795lm/m **1mt** 214lx **2mt** 53lx **3mt** 24lx
IP RATE	IP67
IK RATE	IK9
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SPECIAL SILICONE
OPTIONAL	
LED COLOUR	2700K - 4000K



ik 1617

IK09-10
Walkable

. side



CODE	**5439**-1MT-10WM **5439**-2MT-10WM **5439**-3MT-10WM **5439**-4MT-10WM **5439**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	SIDE
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 642lm/m **1mt** 217lx **2mt** 54lx **3mt** 24lx
IP RATE	IP67
IK RATE	IK9
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SPECIAL SILICONE
OPTIONAL	
LED COLOUR	2700K - 4000K

. top



CODE	**5438**-1MT-10WM **5438**-2MT-10WM **5438**-3MT-10WM **5438**-4MT-10WM **5438**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	TOP
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 889lm/m **1mt** 302lx **2mt** 75lx **3mt** 34lx
IP RATE	IP67
IK RATE	IK10
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SPECIAL SILICONE
OPTIONAL	
LED COLOUR	2700K - 4000K

. double bending



CODE	**5437**-1MT-10WM **5437**-2MT-10WM **5437**-3MT-10WM **5437**-4MT-10WM **5437**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	3D
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 678lm/m **1mt** 229lx **2mt** 57lx **3mt** 25lx
IP RATE	IP67
IK RATE	IK9
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SPECIAL SILICONE
OPTIONAL	
LED COLOUR	2700K - 4000K

duneflex



CODE	**5440**-1MT-10WM **5440**-2MT-10WM **5440**-3MT-10WM **5440**-4MT-10WM **5440**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	TOP
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 698lm/m **1mt** 196lx **2mt** 49lx **3mt** 22lx
IP RATE	IP65
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SPECIAL SILICONE
OPTIONAL	
LED COLOUR	2700K - 4000K



round smooth

. S



CODE	**5421**-1MT-8WM **5421**-2MT-8WM **5421**-3MT-8WM **5421**-4MT-8WM **5421**-5MT-8WM
FIXTURE	FLEXIBLE LED
BENDING	3D
LIGHT SOURCE	LED
POWER	8W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 618lm/m **1mt** 71lx **2mt** 18lx **3mt** 8lx
IP RATE	IP67
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SILICONE
OPTIONAL	
LED COLOUR	2700K - 4000K

. M



CODE	**5423**-1MT-10WM **5423**-2MT-10WM **5423**-3MT-10WM **5423**-4MT-10WM **5423**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	3D
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 912lm/m **1mt** 74lx **2mt** 19lx **3mt** 8lx
IP RATE	IP67
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SILICONE
OPTIONAL	
LED COLOUR	2700K - 4000K

. B



CODE	**5425**-1MT-10WM **5425**-2MT-10WM **5425**-3MT-10WM **5425**-4MT-10WM **5425**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	3D
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 835lm/m **1mt** 89lx **2mt** 22lx **3mt** 10lx
IP RATE	IP67
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SILICONE
OPTIONAL	
LED COLOUR	2700K - 4000K

round knit

. S



CODE	**5422**-1MT-8WM **5422**-2MT-8WM **5422**-3MT-8WM **5422**-4MT-8WM **5422**-5MT-8WM
FIXTURE	FLEXIBLE LED
BENDING	3D
LIGHT SOURCE	LED
POWER	8W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	KNIT
LED COLOUR	**3000K** **CRI** >90 **LMN** 562lm/m **1mt** 45lx **2mt** 11lx **3mt** 5lx
IP RATE	IP67
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SILICONE, NYLON
OPTIONAL	
LED COLOUR	2700K - 4000K

. M



CODE	**5424**-1MT-10WM **5424**-2MT-10WM **5424**-3MT-10WM **5424**-4MT-10WM **5424**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	3D
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	KNIT
LED COLOUR	**3000K** **CRI** >90 **LMN** 811lm/m **1mt** 77lx **2mt** 19lx **3mt** 9lx
IP RATE	IP67
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SILICONE, NYLON
OPTIONAL	
LED COLOUR	2700K - 4000K

. B



CODE	**5426**-1MT-10WM **5426**-2MT-10WM **5426**-3MT-10WM **5426**-4MT-10WM **5426**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	3D
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	KNIT
LED COLOUR	**3000K** **CRI** >90 **LMN** 728lm/m **1mt** 70lx **2mt** 18lx **3mt** 8lx
IP RATE	IP67
MOUNTING SYSTEM	NR. 3 CLIPS/MT
MATERIALS	SILICONE, NYLON
OPTIONAL	
LED COLOUR	2700K - 4000K

neonflex 1010

• 3view

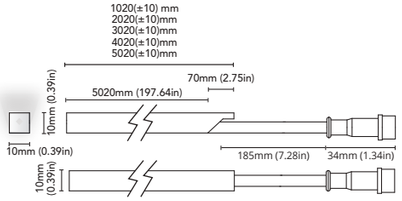

• 3view fc

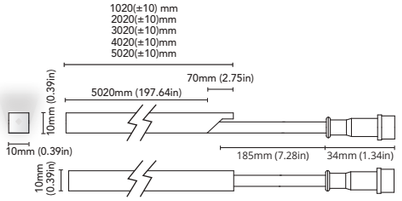

CODE	**5404**-1MT-10WM **5404**-2MT-10WM **5404**-3MT-10WM **5404**-4MT-10WM **5404**-5MT-10WM	**5415**-1MT-10WM **5415**-2MT-10WM **5415**-3MT-10WM **5415**-4MT-10WM **5415**-5MT-10WM
FIXTURE	FLEXIBLE LED	FLEXIBLE LED
BENDING	TOP	TOP
LIGHT SOURCE	LED	LED
POWER	10W/MT	10W/MT
SUPPLY	24 Vdc	24 Vdc
PROTECTION	POLARITY REVERSE	POLARITY REVERSE
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	OPAL	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 690lm/m **1mt** 116lx **2mt** 29lx **3mt** 13lx	**3000K** **CRI** >90 **LMN** 591lm/m **1mt** 99lx **2mt** 25lx **3mt** 11lx
IP RATE	IP68	IP68
MOUNTING SYSTEM	NR. 3 CLIPS/MT	NR. 3 CLIPS/MT
MATERIALS	PU	PU
OPTIONAL		
LED COLOUR	2700K - 4000K	2700K - 4000K

neonflex 0606

. side



. top



CODE	**5431**-1MT-6WM **5431**-2MT-6WM **5431**-3MT-6WM **5431**-4MT-6WM **5431**-5MT-6WM	**5430**-1MT-6WM **5430**-2MT-6WM **5430**-3MT-6WM **5430**-4MT-6WM **5430**-5MT-6WM
FIXTURE	FLEXIBLE LED LIGHTING SOLUTION	FLEXIBLE LED LIGHTING SOLUTION
BENDING	SIDE	TOP
LIGHT SOURCE	LED	LED
POWER	6W/MT	6W/MT
SUPPLY	24 Vdc	24 Vdc
PROTECTION	POLARITY REVERSE	POLARITY REVERSE
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	OPAL	OPAL
LED COLOUR	**3000K**	**3000K**
	CRI >90	**CRI** >90
	LMN 330lm/m	**LMN** 433lm/m
	1mt 94lx	**1mt** 97lx
	2mt 24lx	**2mt** 24lx
	3mt 10lx	**3mt** 11lx
IP RATE	IP68	IP68
MOUNTING SYSTEM	NR. 3 CLIPS/MT	NR. 3 CLIPS/MT
MATERIALS	PU	PU
OPTIONAL		
LED COLOUR	2700K - 4000K	2700K - 4000K



profiles neonflex

CODE	**5400**-PRO1	**5400**-PRO1F	**5400**-PRO2	**5400**-PRO2F	**5400**-PRO3	**5400**-PRO4
	X ART. 5437/5438/5439-1MT	X ART. 5437/5438/5439-1MT	X ART. 5437/5438/5439-1MT	X ART. 5437/5438/5439-1MT	ART 5404/5415-1MT	X ART. 5404/5415-1MT
FIXTURE	PLASTIC PROFILE	FLEXIBLE PLASTIC PROFILE	ALUMINUM PROFILE	FLEXIBLE ALUMINIUM PROFILE	PLASTIC PROFILE	ALUMINIUM PROFILE
	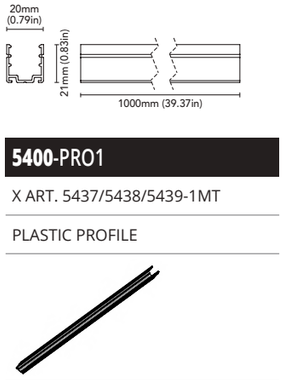	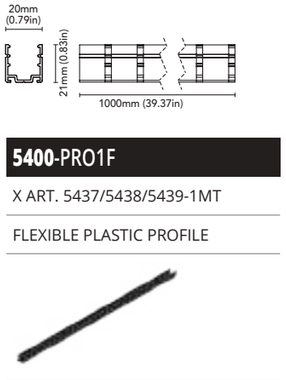	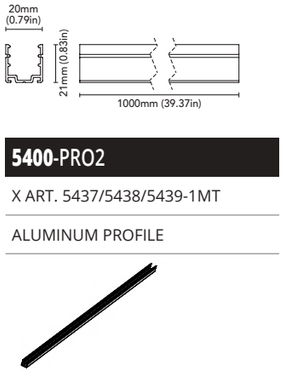	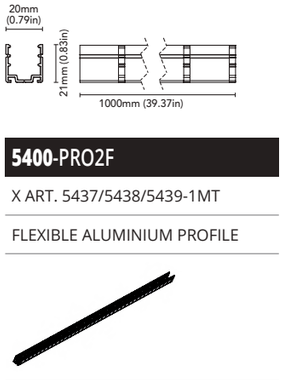	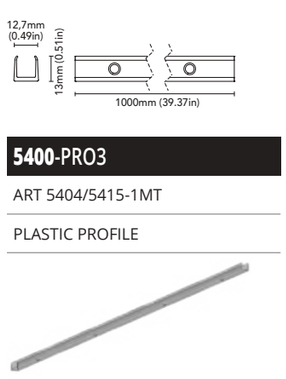	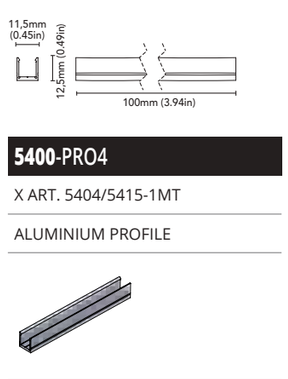

CODE	**5400**-PRO5	**5400**-PRO5F	**5400**-PRO6	**5400**-PRO6F	**5400**-PRO6MF	**5400**-PRO8
	X ART. 5434/5435/5436-1MT	X ART. 5434/5435/5436-1MT	X ART. 5434/5435/5436-1MT	X ART. 5434/5435/5436-1MT	X ART. 5434/5435/5436-1MT	X ART. 5430/5431-1MT
FIXTURE	PLASTIC PROFILE	FLEXIBLE PLASTIC PROFILE	ALUMINIUM PROFILE	FLEXIBLE ALUMINIUM PROFILE	FLEXIBLE STAINLESS STEEL PROFILE	ALUMINIUM PROFILE
						

CODE	**5400**-PRO9	**5400**-PRO9F	**5400**-PRO10	**5400**-PRO10F	**5400**-PRO10R
	X ART. 5432/5433-1MT	X ART. 5432/5433-1MT	X ART. 5440-1MT	X ART. 5440-1MT	X ART. 5440-1MT
FIXTURE	ALUMINIUM PROFILE	FLEXIBLE ALUMINIUM PROFILE	ALUMINIUM PROFILE	FLEXIBLE ALUMINIUM PROFILE	RECESSED ALUMINIUM PROFILE
					

accessories neonflex

. Kit

CODE	**5400**-KIT1	**5400**-KIT2	**5400**-KIT3	**5400**-KIT4	**5400**-KIT5	**5400**-KIT6
FIXTURE	X ART. 5437/5438/5439 KIT (CLIP+SCREWS)	X ART. 5404 KIT (CLIP+SCREWS)	X ART. 5434/5435/5436 KIT (CLIP+SCREWS)	X ART. 5430/5431 KIT (CLIP+SCREWS)	X ART. 5432/5433 KIT (CLIP+SCREWS)	X ART 5440 KIT (CLIP+SCREWS)
						

CODE	**5400**-KIT7	**5400**-KIT8	**5400**-KIT9	**5400**-KIT10	**5400**-KIT11
FIXTURE	X ART. 5421/5422/5423/5424 KIT (CLIP+SCREWS)	X ART. 5425/5426 KIT (CLIP+SCREWS)	X ART. 5418 KIT (CLIP+SCREWS)	X ART. 5417 KIT (CLIP+SCREWS)	X ART. 5416 KIT (CLIP+SCREWS)
					

Tagli di luce per ogni soluzione d'illuminazione,
impiegabili con strip led di diverse potenze.

Linear profiles for every lighting solutions,
to combine with led strips of different power.

mini blade

one . A



two . B



three . C



CODE	**5070**-P06	**5070**-P07	**5070**-P08
FIXTURE	PROFILE	PROFILE	PROFILE
SCREEN	OPAL	OPAL	OPAL
MATERIALS	BODY: ANODIZED ALUMINIUM	BODY: ANODIZED ALUMINIUM	BODY: ANODIZED ALUMINIUM
MOUNTING SYSTEM	CLIPS	CLIPS	
ACCESSORIES			
PLASTIC END CAPS 2X	5070-PEC06 	5070-PEC07 	5070-MEC08 
BAND CLIP	5070-MC06 	5070-MC07 	

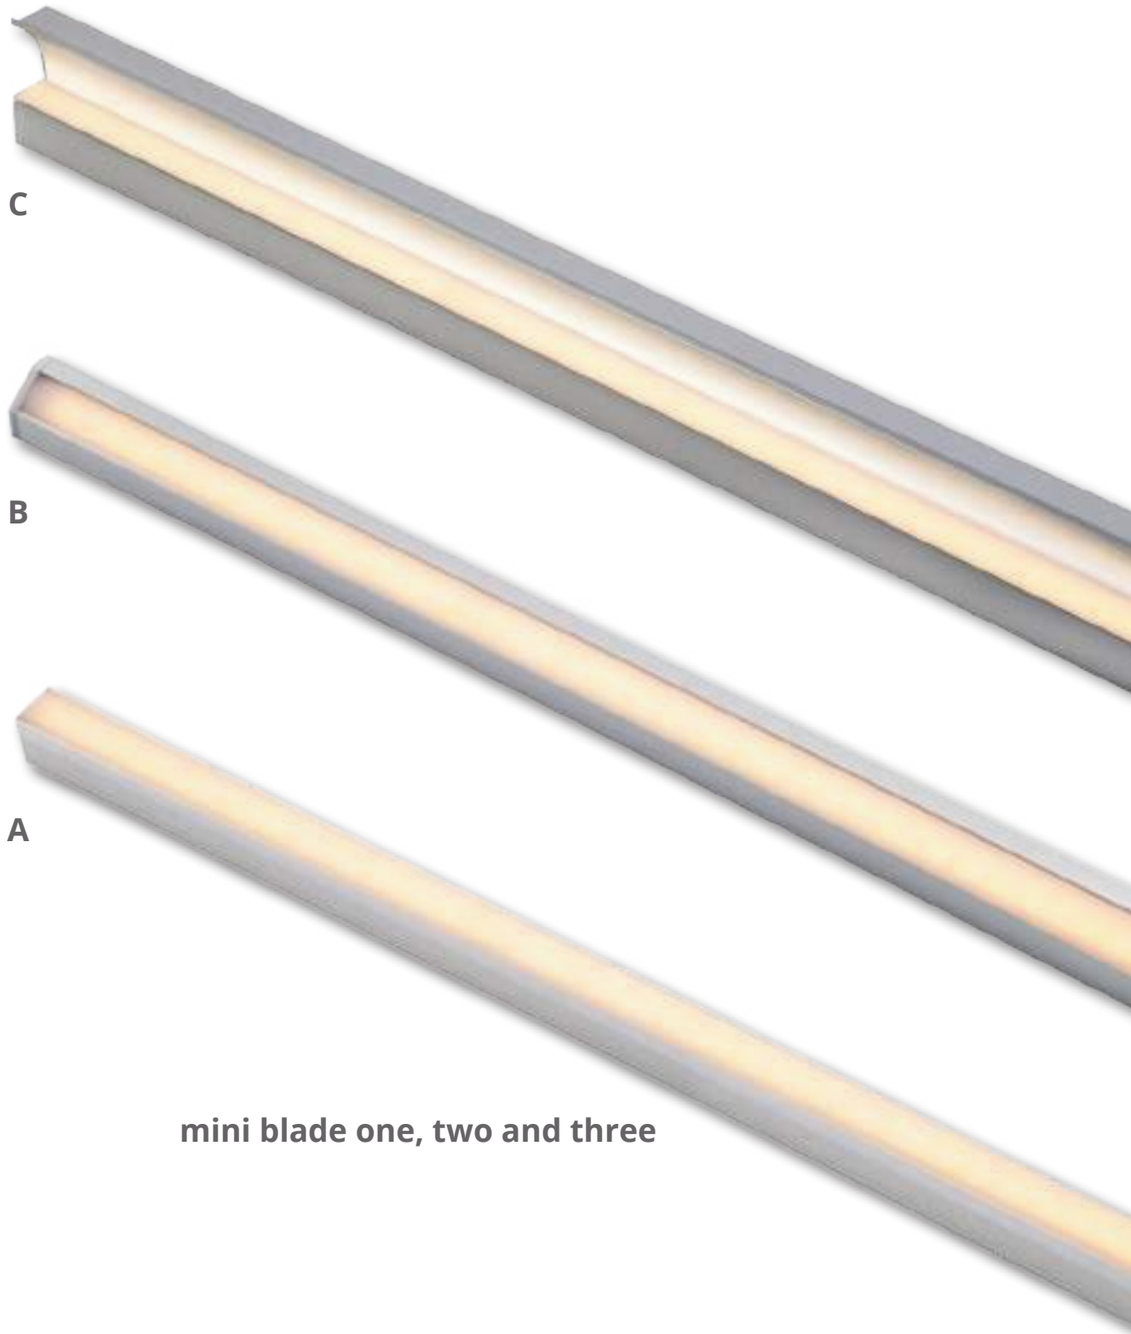

mini blade one, two and three

blade one

one . A



one . B



one . C



CODE	**5070**-P18	**5070**-P46	**5070**-P48
FIXTURE	PROFILE	PROFILE	PROFILE
SCREEN	OPAL	OPAL	OPAL
MATERIALS	BODY: ANODIZED ALUMINIUM	BODY: ANODIZED ALUMINIUM	BODY: ANODIZED ALUMINIUM
MOUNTING SYSTEM	CLIPS	CLIPS	CLIPS
ACCESSORIES			
CAPS 2X	**5070-MEC18** 	**5070-MEC46** 	**5070-M**EC48 
T CONNECTION	**5070-**C18T 	**5070-**C46T 	**5070-**C48T 
L CONNECTION	**5070-**C18L 	**5070-**C46L 	**5070-**C48L 
X CONNECTION	**5070-**C18X 	**5070-**C46X 	**5070-**C48X 
BAND CLIP	**5070-**SPR18 	**5070-**SPR46 	**5070-**SPR48 

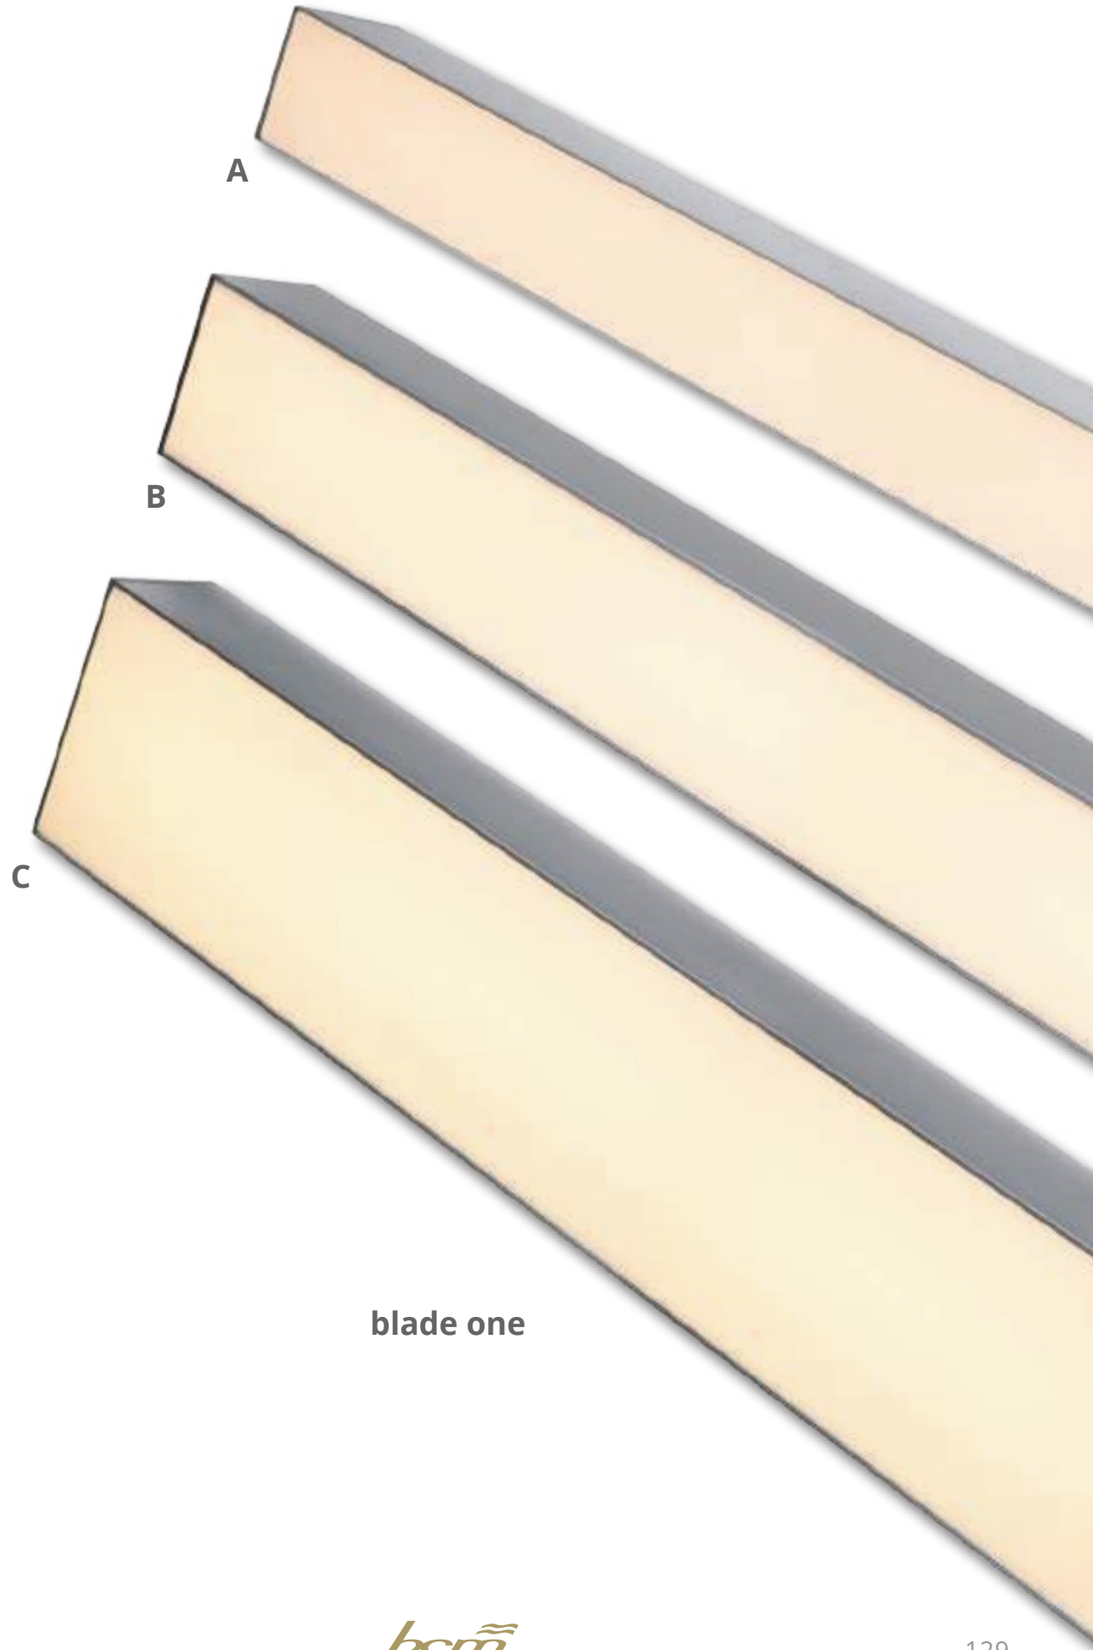

blade two

two . A



two . B



two . C



CODE	**5070**-P17	**5070**-P45	**5070**-P47
FIXTURE	PROFILE	PROFILE	PROFILE
SCREEN	OPAL	OPAL	OPAL
MATERIALS	BODY: ANODIZED ALUMINIUM	BODY: ANODIZED ALUMINIUM	BODY: ANODIZED ALUMINIUM
MOUNTING SYSTEM	SPRINGS OR FIXING BRIDGE	SPRINGS OR FIXING BRIDGE	SPRINGS OR FIXING BRIDGE
ACCESSORIES			
CAPS 2X	**5070**-MEC17 	**5070**-MEC45 	**5070**-MEC47 
T CONNECTION	**5070**-C17T 	**5070**-C45T 	**5070**-C47T 
L CONNECTION	**5070**-C17L 	**5070**-C45L 	**5070**-C47L 
X CONNECTION	**5070**-C17X 	**5070**-C45X 	**5070**-C47X 
FIXING BRIDGE	**5070**-MCB17 	**5070**-MCB45 	**5070**-MCB47 
SPRINGS	**5070**-SPR17 	**5070**-SPR45 	**5070**-SPR47 

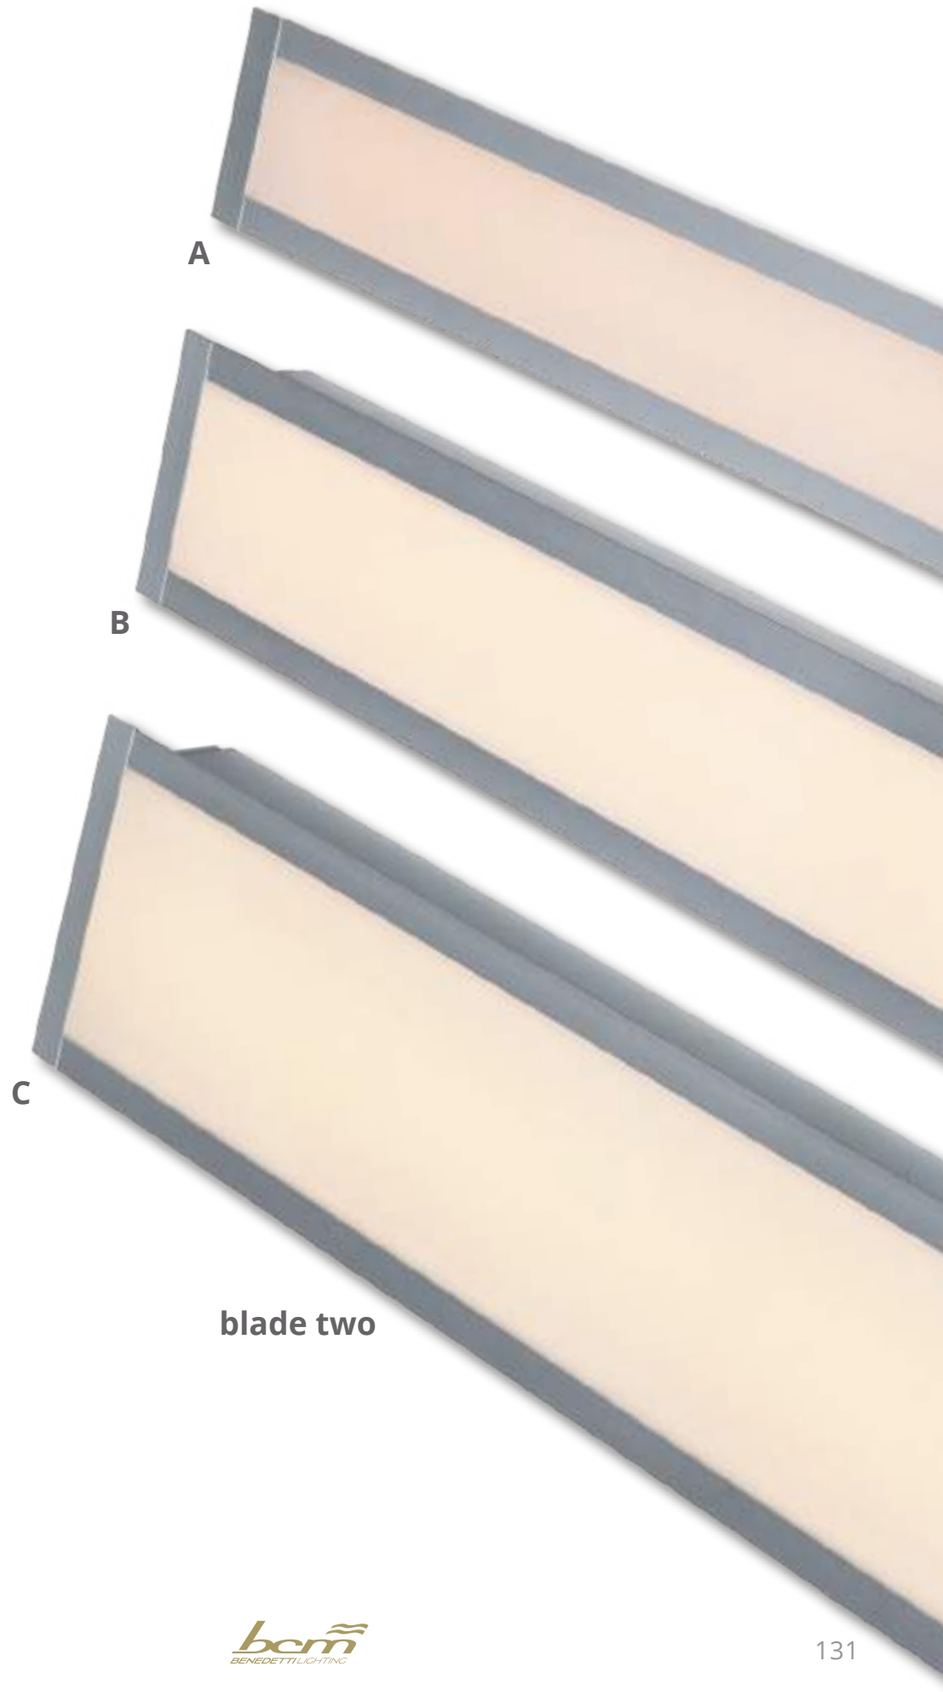

blade three

three . A



three . B



three . C



	three . A	three . B	three . C
CODE	**5070**-P02	**5070**-P04	**5070**-P05
FIXTURE	PROFILE	PROFILE	PROFILE
SCREEN	OPAL	OPAL	OPAL
MATERIALS	BODY: ANODIZED ALUMINIUM	BODY: ANODIZED ALUMINIUM	BODY: ANODIZED ALUMINIUM
MOUNTING SYSTEM	CLIPS	CLIPS	CLIPS
OPTIONAL			
SCREEN	FROSTED	FROSTED	FROSTED
ACCESSORIES			
CAPS 2X	**5070**-PEC02 	**5070**-PEC04 	**5070**-PEC05 
PLASTIC CLIP	**5070**-PC02 	**5070**-PC04 	**5070**-PC05 
METAL CLIP	**5070**-MC02 	**5070**-MC04 	**5070**-MC05 

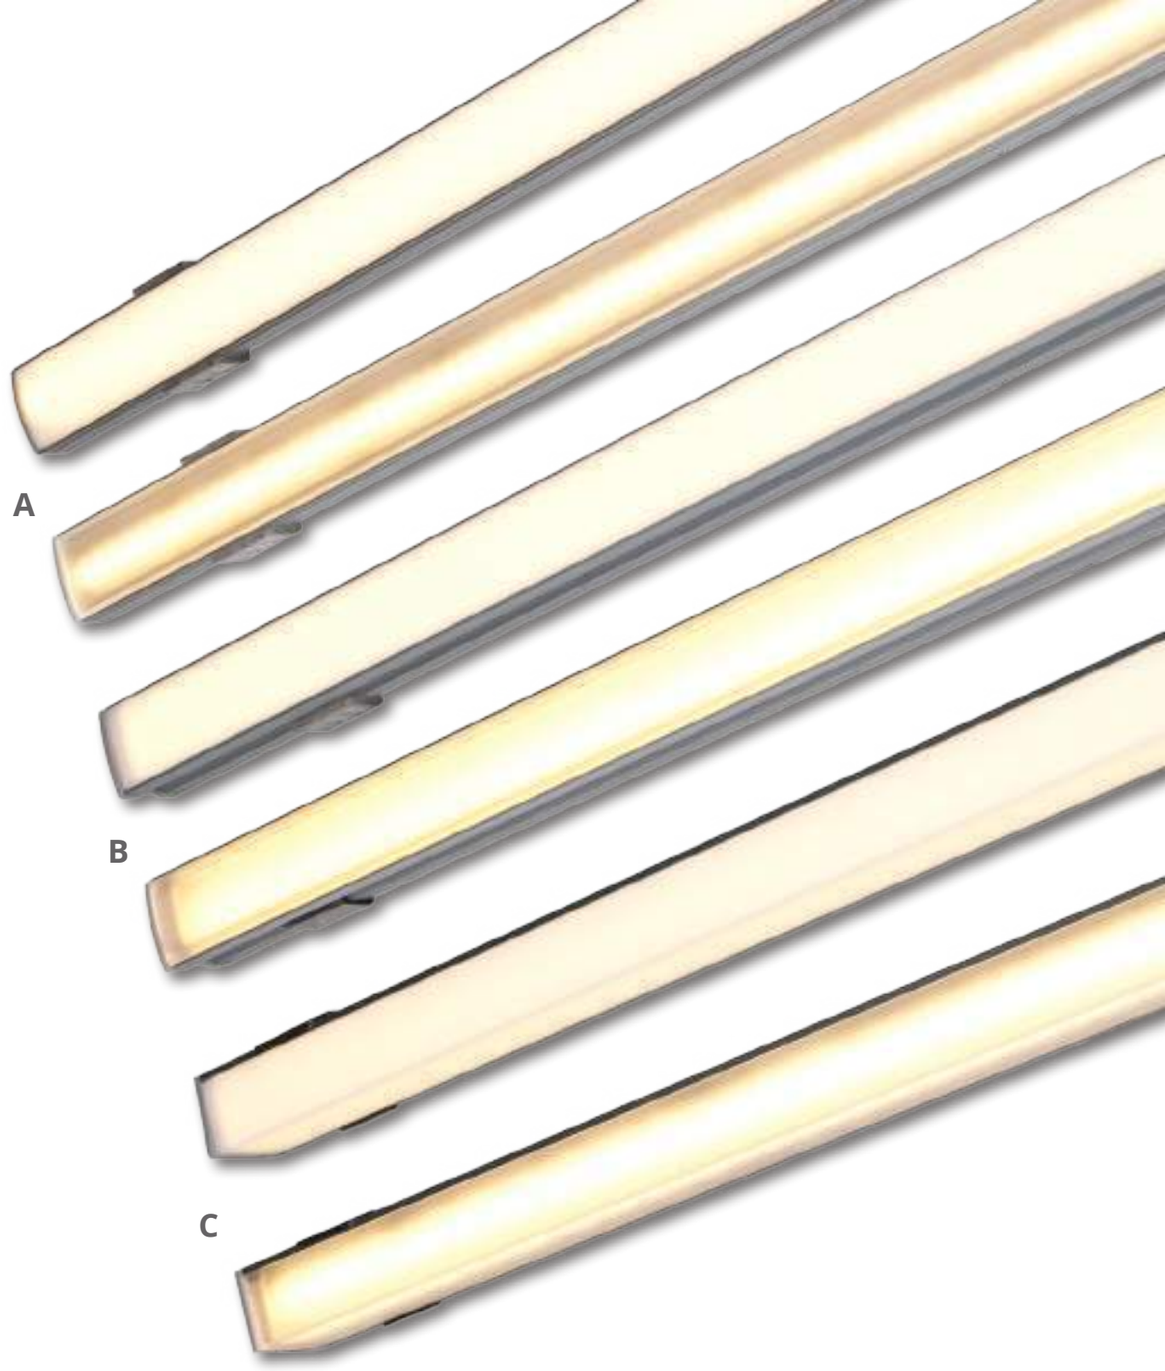

blade three

blade four

four . A



CODE	**5070**-P01
FIXTURE	PROFILE
SCREEN	OPAL
MATERIALS	BODY: ANODIZED ALUMINIUM
OPTIONAL	
SCREEN	FROSTED
ACCESSORIES	
CAPS 2X	**5070**-PEC01 

four . B



CODE	**5070**-P03
FIXTURE	PROFILE
SCREEN	OPAL
MATERIALS	BODY: ANODIZED ALUMINIUM
OPTIONAL	
SCREEN	FROSTED
ACCESSORIES	
CAPS 2X	**5070**-PEC03 



blade four

blade five



CODE	**5070** -P23
FIXTURE	PROFILE
SCREEN	OPAL
MATERIALS	BODY: ANODIZED ALUMINIUM
OPTIONAL	
SCREEN	FROSTED
ACCESSORIES	
CAPS 2X	**5070**-PEC23 



blade five

miniflex

. 240-TOP



. 240IP-TOP



CODE	**5337**-240NV-10WM	**5337**-240NVP-10WM
FIXTURE	SLIM FLEX LED	SLIM FLEX LED
BENDING	TOP	TOP
LIGHT SOURCE	LED	LED
POWER	240LED/MT - 10W/MT	240LED/MT - 10W/MT
SUPPLY	24 Vdc	24 Vdc
PROTECTION	POLARITY REVERSE	POLARITY REVERSE
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
LED COLOUR	3000K CRI >90 LMN 1154lm/m 1mt 390lx 2mt 97lx 3mt 43lx	3000K CRI >90 LMN 1047lm/m 1mt 365lx 2mt 91lx 3mt 41lx
IP RATE	IP20	IP65
MOUNTING SYSTEM	ADHESIVE TAPE	ADHESIVE TAPE
OPTIONAL		
LED COLOUR	2700K - 4000K	2700K - 4000K

flex

. 60-TOP



. 60IP-TOP



. 120-TOP



. 120IP-TOP



. 240-TOP



CODE	**5338**-60MC-5WM	**5338**-60MCP-5WM	**5338**-120MC-10WM	**5338**-120MCP-10WM	**5337**-240MV-20WM
FIXTURE	FLEX LED	FLEX LED	FLEX LED	FLEX LED	FLEX LED
BENDING	TOP	TOP	TOP	TOP	TOP
LIGHT SOURCE	LED	LED	LED	LED	LED
POWER	60LED/MT - 5W/MT	60LED/MT - 5W/MT	120LED/MT - 10W/MT	120LED/MT - 10W/MT	240LED/MT - 20W/MT
SUPPLY	16-32 Vdc	16-32 Vdc	16-32 Vdc	16-32 Vdc	24 Vdc
PROTECTION	POLARITY REVERSE	POLARITY REVERSE	POLARITY REVERSE	POLARITY REVERSE	POLARITY REVERSE
DIMMABLE	YES	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE	WIDE
LED COLOUR	3000K **CRI** >90 **LMN** 435lm/m **1mt** 147lx **2mt** 37lx **3mt** 16lx	3000K **CRI** >90 **LMN** 345lm/m **1mt** 124lx **2mt** 30lx **3mt** 13lx	3000K **CRI** >90 **LMN** 929lm/m **1mt** 314lx **2mt** 78lx **3mt** 35 lx	3000K **CRI** >90 **LMN** 838lm/m **1mt** 308lx **2mt** 77lx **3mt** 34lx	3000K **CRI** >90 **LMN** 2037lm/m **1mt** 694lx **2mt** 173lx **3mt** 77lx
IP RATE	IP20	IP67	IP20	IP67	IP20
MOUNTING SYSTEM	ADHESIVE TAPE	ADHESIVE TAPE	ADHESIVE TAPE	ADHESIVE TAPE	ADHESIVE TAPE
OPTIONAL					
LED COLOUR	2700K - 4000K	2700K - 4000K	2700K - 4000K	2700K - 4000K	2700K - 4000K

* For proper use, install this strip on heatsink.



Anti-glare

malibù ag

. 60



CODE	**3521**-60A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 87lm **1mt** 63lx **2mt** 16lx **3mt** 7lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	IP66

. 75



CODE	**3521**-75A-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 196lm **1mt** 63lx **2mt** 16lx **3mt** 7lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)
IP RATE	IP66

. 85



CODE	**3521**-85A-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 249lm **1mt** 120lx **2mt** 30lx **3mt** 13lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)
IP RATE	IP66

. 95



CODE	**3521**-95A-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 286lm **1mt** 165lx **2mt** 41lx **3mt** 18lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)
IP RATE	IP66



INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS

malibù ag . 85



FINISHES		
	FE	23 20 4 34
	I	23

newport ag

. 85



. 95



CODE	**3525**-85A-B2W	**3525**-95A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	28°	32°
LIGHT SOURCE	POWER LED	POWER LED
POWER	MAX 2W	MAX 4W
SUPPLY	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	LENS	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 196lm **1mt** 63lx **2mt** 16lx **3mt** 7lx	**3000K** **CRI** >90 **LMN** 249lm **1mt** 120lx **2mt** 30lx **3mt** 13lx
IP RATE	IP40	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS	SPRINGS
OPTIONAL		
LED COLOUR	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)
IP RATE	IP66	IP66



FINISHES		
	FE=R	23 20 4 34
	I	23



newport ag . 85

orlando ag

. 60



. 75



. 85



. 95



CODE	**3520**-60A-B1.5W **3520**-60C-B1.5W	**3520**-75A-B2W **3520**-75C-B2W	**3520**-85A-B4W **3520**-85C-B4W	**3520**-95A-B6W **3520**-95C-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	LENS	LENS	LENS	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 87lm **1mt** 63lx **2mt** 16lx **3mt** 7lx	3000K **CRI** >90 **LMN** 196lm **1mt** 63lx **2mt** 16lx **3mt** 7lx	3000K **CRI** >90 **LMN** 249lm **1mt** 120lx **2mt** 30lx **3mt** 13lx	3000K **CRI** >90 **LMN** 286lm **1mt** 165lx **2mt** 41lx **3mt** 18lx
IP RATE	IP40	IP40	IP40	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS	(A) SPRINGS (C) SCREWS	(A) SPRINGS (C) SCREWS	(A) SPRINGS (C) SCREWS
OPTIONAL				
SWITCH ON THE FRAME		AVAILABLE	AVAILABLE	AVAILABLE
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)
IP RATE	IP66	IP66	IP66	IP66



INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS

orlando ag . 60



FINISHES		
	FE	23 20 4 34
	I	23

switch on the frame



phoenix ag

. 85



CODE	**3524**-85A-B2W **3524**-85C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	28°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 196lm **1mt** 63lx **2mt** 16lx **3mt** 7lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
SWITCH ON THE FRAME	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)
IP RATE	IP66

. 95



CODE	**3524**-95A-B4W **3524**-95C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	32°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 249lm **1mt** 120lx **2mt** 30lx **3mt** 13lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
SWITCH ON THE FRAME	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)
IP RATE	IP66



INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS

phoenix ag . 95



FINISHES		
	FE=R	23 20 4 34
	I	23

switch on the frame



seattle ag

. 55



. 70



. 80



. 90



CODE	**3523**-55A-B1.5W	**3523**-70A-B2W	**3523**-80A-B4W	**3523**-90A-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	LENS	LENS	LENS	LENS
LED COLOUR	3000K CRI >90 LMN 87lm 1mt 63lx 2mt 16lx 3mt 7lx	3000K CRI >90 LMN 196lm 1mt 63lx 2mt 16lx 3mt 7lx	3000K CRI >90 LMN 249lm 1mt 120lx 2mt 30lx 3mt 13lx	3000K CRI >90 LMN 286lm 1mt 165lx 2mt 41lx 3mt 18lx
IP RATE	IP40	IP40	IP40	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS	SPRINGS	SPRINGS	SPRINGS
OPTIONAL				
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)
IP RATE	IP66	IP66	IP66	IP66



FINISHES		
	FE	23 20 4 34
	I	23



INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS

seattle ag . 70

atlanta ag

. 80



CODE	**3527**-80A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	28°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 196lm **1mt** 63lx **2mt** 16lx **3mt** 7lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)
IP RATE	IP66

. 90



CODE	**3527**-90A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	32°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 249lm **1mt** 120lx **2mt** 30lx **3mt** 13lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - (3000K+RED)
IP RATE	IP66



INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS

atlanta ag . 80



FINISHES		
	FE=R	23 20 4 34
	I	23

charlotte ag

. 55



CODE	**3522**-55A-B1.5W **3522**-55C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 87lm **1mt** 63lx **2mt** 16lx **3mt** 7lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
SWITCH ON THE FRAME	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	IP66

. 70



CODE	**3522**-70A-B2W **3522**-70C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 196lm **1mt** 63lx **2mt** 16lx **3mt** 7lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
SWITCH ON THE FRAME	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)
IP RATE	IP66

. 80



CODE	**3522**-80A-B4W **3522**-80C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 249lm **1mt** 120lx **2mt** 30lx **3mt** 13lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
SWITCH ON THE FRAME	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)
IP RATE	IP66

. 90 ag



CODE	**3522**-90A-B6W **3522**-90C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 286lm **1mt** 165lx **2mt** 41lx **3mt** 18lx
IP RATE	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
SWITCH ON THE FRAME	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)
IP RATE	IP66



INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS

charlotte ag . 80



FINISHES		
	FE	23 20 4 34
	I	23

switch on the frame



daytona ag

. 80



. 90



CODE	**3526**-80A-B2W **3526**-80C-B2W	**3526**-90A-B4W **3526**-90C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	28°	32°
LIGHT SOURCE	POWER LED	POWER LED
POWER	MAX 2W	MAX 4W
SUPPLY	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	LENS	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 196lm **1mt** 63lx **2mt** 16lx **3mt** 7lx	3000K **CRI** >90 **LMN** 249lm **1mt** 120lx **2mt** 30lx **3mt** 13lx
IP RATE	IP40	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS	(A) SPRINGS (C) SCREWS
OPTIONAL		
SWITCH ON THE FRAME	AVAILABLE	AVAILABLE
LED COLOUR	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)
IP RATE	IP66	IP66



INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS

daytona ag . 90



FINISHES		
	FE=R	23 20 4 34
	I	23

switch on the frame



alabama ag

. 60



. 75



. 85



. 95



CODE	**3519**-60A-B1.5W **3519**-60C-B1.5W	**3519**-75A-B2W **3519**-75C-B2W	**3519**-85A-B4W **3519**-85C-B4W	**3519**-95A-B6W **3519**-95C-B6W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO	NO	NO
LIGHT SOURCE	POWER LED	POWER LED	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 2W	MAX 4W	MAX 6W
SUPPLY	8-32 Vdc	8-32 Vdc	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES	YES	YES
BEAM	WIDE	WIDE	WIDE	WIDE
SCREEN	LENS	LENS	LENS	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 87lm **1mt** 63lx **2mt** 16lx **3mt** 7lx	3000K **CRI** >90 **LMN** 196lm **1mt** 63lx **2mt** 16lx **3mt** 7lx	3000K **CRI** >90 **LMN** 249lm **1mt** 120lx **2mt** 30lx **3mt** 13lx	3000K **CRI** >90 **LMN** 286lm **1mt** 165lx **2mt** 41lx **3mt** 18lx
IP RATE	IP40	IP40	IP40	IP40
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS	(A) SPRINGS (C) SCREWS	(A) SPRINGS (C) SCREWS	(A) SPRINGS (C) SCREWS
OPTIONAL				
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)	2700K - 4000K - (3000K+RED)
IP RATE	IP66	IP66	IP66	IP66



INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS

alabama ag . 75



FINISHES		
	FE	23 20 4 34
	I	23

tampa ag . 40

sarasota ag . 40





CODE	**3528**-40-Z1.5W	**3529**-40-Z1.5W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO
LIGHT SOURCE	POWER LED	POWER LED
POWER	MAX 1,5W	MAX 1,5W
SUPPLY	8-32 Vdc	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	LENS	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 73lm **1mt** 49lx **2mt** 12lx **3mt** 5lx	**3000K** **CRI** >90 **LMN** 73lm **1mt** 49lx **2mt** 12lx **3mt** 5lx
IP RATE	IP66	IP66
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS	SPRINGS
OPTIONAL		
LED COLOUR	2700K - 4000K - RED - BLUE	2700K - 4000K - RED - BLUE





FINISHES		
	FE	23 20 4 34
	I	23



tampa ag

INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS



sarasota ag

black

. 1010



CODE	**5418**-1MT-10WM **5418**-2MT-10WM **5418**-3MT-10WM **5418**-4MT-10WM **5418**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	TOP
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	BLACK
LED COLOUR	**3000K** **CRI** >90 **LMN** 39.6lm **1mt** 19lx **2mt** 5lx **3mt** 2lx
IP RATE	IP67
MATERIALS	SILICONE
MOUNTING SYSTEM	NR 5 CLIPS/MT
OPTIONAL	
LED COLOUR	2700K - 4000K

. 1220



CODE	**5417**-1MT-10WM **5417**-2MT-10WM **5417**-3MT-10WM **5417**-4MT-10WM **5417**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	SIDE
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	BLACK
LED COLOUR	**3000K** **CRI** >90 **LMN** 15.1lm **1mt** 8lx **2mt** 12lx **3mt** 1lx
IP RATE	IP67
MATERIALS	SILICONE
MOUNTING SYSTEM	NR 5 CLIPS/MT
OPTIONAL	
LED COLOUR	2700K - 4000K

. 1616



CODE	**5416**-1MT-10WM **5416**-2MT-10WM **5416**-3MT-10WM **5416**-4MT-10WM **5416**-5MT-10WM
FIXTURE	FLEXIBLE LED
BENDING	TOP
LIGHT SOURCE	LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	BLACK
LED COLOUR	**3000K** **CRI** >90 **LMN** 27.1lm **1mt** 13lx **2mt** 3lx **3mt** 1lx
IP RATE	IP67
MATERIALS	SILICONE
MOUNTING SYSTEM	NR 5 CLIPS/MT
OPTIONAL	
LED COLOUR	2700K - 4000K



blade three black

three . A



CODE	**5070**-P02-23
FIXTURE	PROFILE
SCREEN	SMOKED
MATERIALS	BODY: BLACK ANODIZED ALUMINIUM
MOUNTING SYSTEM	CLIPS
ACCESSORIES	
CAPS 2X	**5070**-PEC02-23 
METAL CLIP	**5070**-MC02-23 

three . B



CODE	**5070**-P04-23
FIXTURE	PROFILE
SCREEN	SMOKED
MATERIALS	BODY: BLACK ANODIZED ALUMINIUM
MOUNTING SYSTEM	CLIPS
ACCESSORIES	
CAPS 2X	**5070**-PEC04-23 
METAL CLIP	**5070**-MC04-23 

three . C



CODE	**5070**-P09-23
FIXTURE	PROFILE
SCREEN	SMOKED
MATERIALS	BODY: BLACK ANODIZED ALUMINIUM
MOUNTING SYSTEM	CLIPS
ACCESSORIES	
CAPS 2X	**5070**-PEC09-23 
METAL CLIP	**5070**-MC09-23 

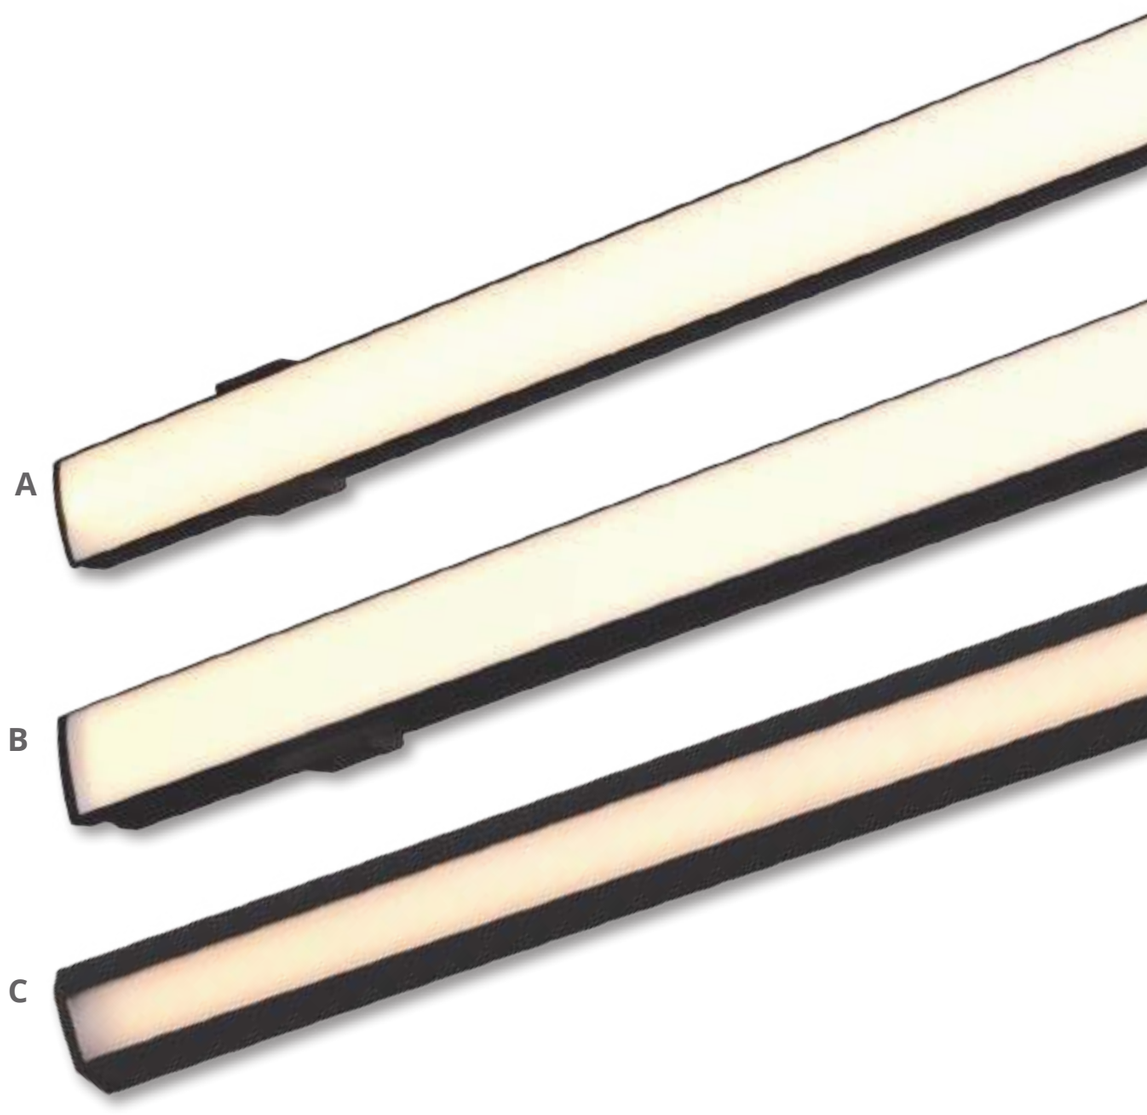

blade three black

mini blade black

one . A



CODE	**5070**-P06-23
FIXTURE	PROFILE
SCREEN	SMOKED
MATERIALS	BODY: BLACK ANODIZED ALUMINIUM
MOUNTING SYSTEM	CLIPS

ACCESSORIES	
CAPS 2X	**5070**-PEC06-23 
METAL CLIP	**5070**-MC06-23 



mini blade black

Track system

tym track 4



CODE	**5470**-T4B2MT
FIXTURE	ELECTRIFIED TRACK (INTERNAL POWER SUPPLY CONNECTOR NOT INCLUDED)
SUPPLY	24 Vdc
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	SCREWS



FINISHES		
FE	FE	23

tym track 5

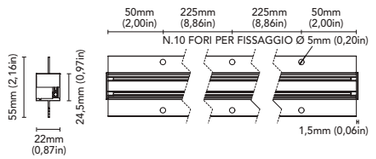

CODE	**5470**-T5B2MT
FIXTURE	ELECTRIFIED TRACK (INTERNAL POWER SUPPLY CONNECTOR NOT INCLUDED)
SUPPLY	24 Vdc
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	SCREWS





FINISHES		
FE		23 ●

tym glow

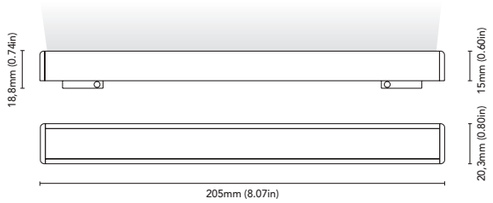

CODE	**5471**-204-B6W
FIXTURE	LINEAR LIGHT ELEMENT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	24 Vdc
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 413lm **1mt** 159lx **2mt** 40lx **3mt** 18lx
IP RATE	IP40
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 4-5





tym glow



FINISHES		
FE	23	●

tym ray

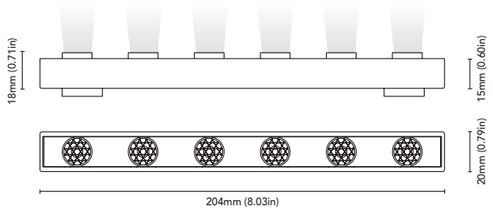

CODE	**5471**-204-Z6W
FIXTURE	LINEAR LIGHT ELEMENT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	24 Vdc
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 452lm **1mt** 1236lx **2mt** 309lx **3mt** 137lx
IP RATE	IP40
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 4-5



tym ray



FINISHES		
	FE	23 ●

tym dart



CODE	**5472**-110-Z5W
FIXTURE	SPOTLIGHT ELEMENT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 5W
SUPPLY	24 Vdc
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 374lm **1mt** 1232lx **2mt** 308lx **3mt** 137lx
IP RATE	IP40
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 4-5



FINISHES		
FE	23	●



tym dart

tym glow 2

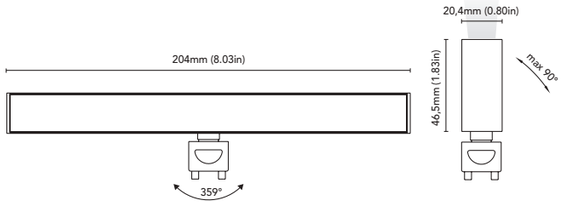

CODE	**5473**-204-B6W
FIXTURE	LINEAR LIGHT ELEMENT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	24 Vdc
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	**3000K** **CRI** >90 **LMN** 352lm **1mt** 148lx **2mt** 37lx **3mt** 16lx
IP RATE	IP40
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 4-5





tym glow 2



FINISHES		
FE	23	●

tym ray 2

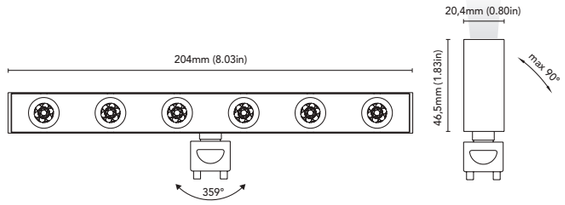

CODE	**5473**-204-Z6W
FIXTURE	LINEAR LIGHT ELEMENT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	24 Vdc
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 381lm **1mt** 1262lx **2mt** 315lx **3mt** 140lx
IP RATE	IP40
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 4-5



tym ray 2



FINISHES		
FE	23	●

accessories tym track 4-5



CODE	5470-5077LT
FIXTURE	ELECTRIFIED LINEAR CONNECTOR X TYM TRACK 4
SUPPLY	24 Vdc
IP RATE	IP 40



CODE	5470-5077L
FIXTURE	ELECTRIFIED ANGULAR CONNECTOR X TYM TRACK 4
SUPPLY	24 Vdc
IP RATE	IP 40



CODE	5470-5080LT
FIXTURE	ELECTRIFIED LINEAR CONNECTOR X TYM TRACK 5
SUPPLY	24 Vdc
IP RATE	IP 40



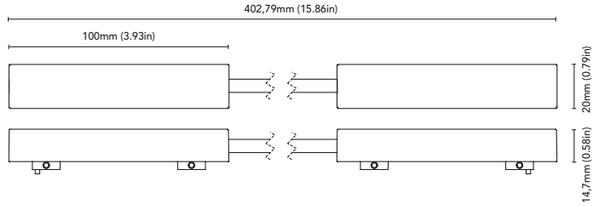

CODE	5470-5080LTL
FIXTURE	ELECTRIFIED ANGULAR CONNECTOR X TYM TRACK 5
SUPPLY	24 Vdc
IP RATE	IP 40



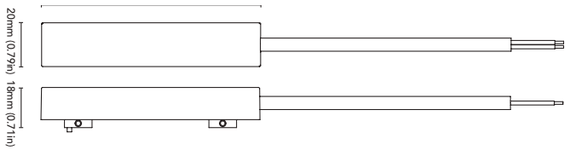

CODE	5470-5080LDT
FIXTURE	POWER SUPPLY CONNECTOR
SUPPLY	24 Vdc
IP RATE	IP 40



tym track 6

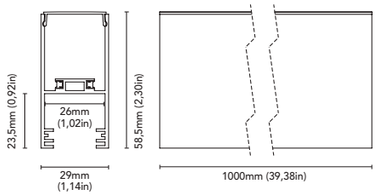

CODE	**5480**-T6B2MT
FIXTURE	ELECTRIFIED TRACK (INTERNAL POWER SUPPLY CONNECTOR NOT INCLUDED)
SUPPLY	48 Vdc
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	SCREWS



FINISHES		
	FE	23



tym track 8



CODE	**5480**-T8B2MT
FIXTURE	ELECTRIFIED TRACK (INTERNAL POWER SUPPLY CONNECTOR NOT INCLUDED)
SUPPLY	48 Vdc
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	SCREWS



FINISHES		
FE	23	●

tym ray r



CODE	**5484**-115-Z6W
FIXTURE	LINEAR LIGHT ELEMENT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 5W
SUPPLY	48 Vdc
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 426lm 1mt 729lx 2mt 182lx 3mt 81lx
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 6-8





FINISHES		
FE		23

tym glow r



CODE	**5484**-115-B6W
FIXTURE	LINEAR LIGHT ELEMENT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	48 Vdc
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN 313lm 1mt 110lx 2mt 28lx 3mt 12lx
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 6-8



FINISHES		
FE		23



tym glow r

tym ray adj



CODE	**5485**-115-Z6W
FIXTURE	LINEAR LIGHT ELEMENT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	48 Vdc
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 485lm **1mt** 1102lx **2mt** 275lx **3mt** 122lx
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 6-8





FINISHES		
FE		23

tym glow adj



CODE	**5485**-115-B6W
FIXTURE	LINEAR LIGHT ELEMENT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	48 Vdc
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 313lm **1mt** 110lx **2mt** 28lx **3mt** 12lx
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 6-8





FINISHES		
FE		23

tym glow adj

tym dart r

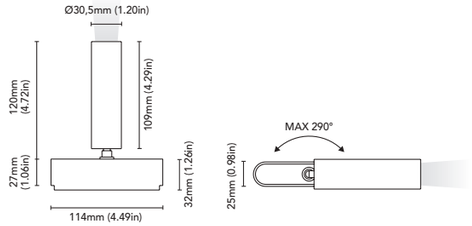

CODE	**5486**-115-Z7W
FIXTURE	SPOTLIGHT ELEMENT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 7W
SUPPLY	48 Vdc
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K **CRI** >90 **LMN** 537lm **1mt** 1824lx **2mt** 456lx **3mt** 203lx
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 6-8



tym dart r



FINISHES		
FE		23

tym track 9



CODE	**5480**-T9B2MT
FIXTURE	ELECTRIFIED TRACK (INTERNAL POWER SUPPLY CONNECTOR NOT INCLUDED)
SUPPLY	24 Vdc
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	SCREWS



FINISHES		
FE	23	●

tym mini glow

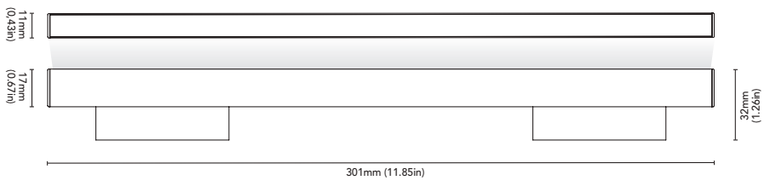

CODE	**5482**-302-B10W
FIXTURE	LINEAR LIGHT ELEMENT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 10W
SUPPLY	24 Vdc
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K **CRI** >90 **LMN** 214lm **1mt** 77lx **2mt** 19lx **3mt** 9lx
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 9



tym mini glow



FINISHES		
	FE	23 ●

tym mini ray

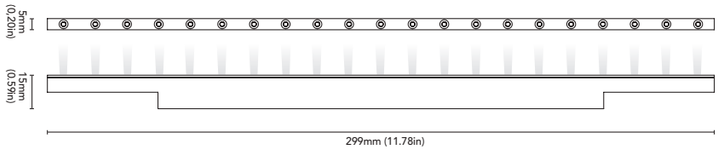

CODE	**5482**-302-Z5W
FIXTURE	LINEAR LIGHT ELEMENT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 5W
SUPPLY	24 Vdc
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >90 LMN 48lm 1mt 44lx 2mt 11lx 3mt 5lx
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 9





FINISHES		
FE	FE	23



tym mini ray

tym mini dart



CODE	**5483**-60-Z5W
FIXTURE	SPOTLIGHT ELEMENT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 5W
SUPPLY	24 Vdc
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
LED COLOUR	**3000K** **CRI** >90 **LMN** 328lm **1mt** 1134lx **2mt** 283lx **3mt** 126lx
IP RATE	IP20
MATERIALS	ALUMINIUM
MOUNTING SYSTEM	CONNECTED ON TYM TRACK 9



tym mini dart



FINISHES		
FE	23	●

accessories tym track 6-8-9

CODE	**5480**-CT6L	**5480**-CT8L	**5480**-CT8I	**5480**-CT9L	**5480**-ILINKT8	**5480**-ILINKT9
FIXTURE	ANGULAR CONNECTOR X TYM TRACK 6	ANGULAR CONNECTOR X TYM TRACK 8	LINEAR CONNECTOR X TYM TRACK 8	ANGULAR CONNECTOR X TYM TRACK 9	LINEAR ELECTRIFIED CONNECTOR X TYM TRACK 6-8	LINEAR ELECTRIFIED CONNECTOR X TYM TRACK 9
SUPPLY	48 Vdc	48 Vdc	48 Vdc	48 Vdc	48 Vdc	48 Vdc





















CODE	**5480**-CLINKT8	**5480**-CLINKT9	**5480**-INMODT8	**5480**-INMODT9
FIXTURE	ANGULAR ELECTRIFIED CONNECTOR X TYM TRACK 6-8	ANGULAR ELECTRIFIED CONNECTOR X TYM TRACK 9	POWER SUPPLY CONNECTOR X TYM TRACK 6-8	POWER SUPPLY CONNECTOR X TYM TRACK 9
SUPPLY	48 Vdc	48 Vdc	48 Vdc	48 Vdc





















CODE	**5480**-CONPCST9	**5480**-MCT6	**5480**-MCT9	**5480**-PECT6	**5480**-PECT8	**5480**-PECT9
FIXTURE	CONNECTING BRACKET X TYM TRACK 9	CLIP X TYM TRACK 6	CLIP X TYM TRACK 9	ENDCAP X TYM TRACK 6	ENDCAP X TYM TRACK 8	ENDCAP X TYM TRACK 9













Table of articles

CODICE	PRODUCT	PAGE
2182-I-Z1.5W-B	Catalina I - 1,5W	86
2184-I-Z1.5W-B	Ventura I - 1,5W	88
2184U-I-Z1.5W-B	Ventura I USB - 1,5W	90
2185-I-Z1.5W-B	Arizona I - 1,5W	92
2185U-I-Z1.5W-B	Arizona I USB- 1,5W	94
2186-I-B3W-A	Philly I - 3W	96
2186U-I-B3W-A	Philly I USB- 3W	98
3405-55A-B1.5W-S	Miami 55A - 1,5W	54
3405-55C-B1.5W-S	Miami 55C - 1,5W	54
3405-70A-B2W-S	Miami 70A - 2W	54
3405-70C-B2W-S	Miami 70C - 2W	54
3405-80A-B4W-S	Miami 80A - 4W	54
3405-80C-B4W-S	Miami 80C - 4W	54
3405-90A-B6W-S	Miami 90A - 6W	54
3405-90C-B6W-S	Miami 90C - 6W	54
3406-60A-B1.5W-S	Orlando 60A - 1,5W	34
3406-60C-B1.5W-S	Orlando 60C - 1,5W	34
3406-75A-B2W-S	Orlando 75A - 2W	34
3406-75C-B2W-S	Orlando 75C - 2W	34
3406-85A-B4W-S	Orlando 85A - 4W	34
3406-85C-B4W-S	Orlando 85C - 4W	34
3406-95A-B6W-S	Orlando 95A - 6W	34
3406-95C-B6W-S	Orlando 95C - 6W	34
3407-55A-B1.5W-S	Charlotte 55A - 1,5W	46
3407-55C-B1.5W-S	Charlotte 55C - 1,5W	46
3407-70A-B2W-S	Charlotte 70A - 2W	46
3407-70C-B2W-S	Charlotte 70C - 2W	46
3407-80A-B4W-S	Charlotte 80A - 4W	46
3407-80C-B4W-S	Charlotte 80C - 4W	46
3407-90A-B6W-S	Charlotte 90A - 6W	46
3407-90C-B6W-S	Charlotte 90C - 6W	46
3408-85A-B2W-S	Phoenix 85A - 2W	36
3408-85C-B2W-S	Phoenix 85C - 2W	36
3408-95A-B4W-S	Phoenix 95A - 4W	36
3408-95C-B4W-S	Phoenix 95C - 4W	36
3409-80A-B2W-S	Daytona 80A - 2W	48
3409-80C-B2W-S	Daytona 80C - 2W	48
3409-90A-B4W-S	Daytona 90A - 4W	48
3409-90C-B4W-S	Daytona 90C - 4W	48
3411-55A-B1.5W-S	Venice 55A - 1,5W	50
3411-70A-B2W-S	Venice 70A - 2W	50
3411-80A-B4W-S	Venice 80A - 4W	50
3411-90A-B6W-S	Venice 90A - 6W	50
3412-60A-B1.5W-S	Malibù 60A - 1,5W	26
3412-75A-B2W-S	Malibù 75A - 2W	26
3412-85A-B4W-S	Malibù 85A - 4W	26
3412-95A-B6W-S	Malibù 95A - 6W	26
3413-55A-B1.5W-S	Seattle 55A - 1,5W	38
3413-70A-B2W-S	Seattle 70A - 2W	38
3413-80A-B4W-S	Seattle 80A - 4W	38
3413-90A-B6W-S	Seattle 90A - 6W	38
3414-85A-B2W-S	Newport 85A - 2W	30
3414-95A-B4W-S	Newport 95A - 4W	30
3415-80A-B2W-S	Atlanta 80A - 2W	42
3415-90A-B4W-S	Atlanta 90A - 4W	42
3416-40-Z1.5W-S	Tampa 40 - 1,5W	72
3417-40-Z1.5W-S	Sarasota 40 - 1,5W	72
3418-77A-B2W-S	Aspen 77A - 2W	58
3418-77AS-B2W-S	Aspen 77AS - 2W	58
3418-77C-B2W-S	Aspen 77C - 2W	58
3418-77CS-B2W-S	Aspen 77CS - 2W	58
3418-87A-B4W-S	Aspen 87A - 4W	58
3418-87AS-B4W-S	Aspen 87AS - 4W	58
3418-87C-B4W-S	Aspen 87C - 4W	58
3418-87CS-B4W-S	Aspen 87CS - 4W	58
3419-77A-B2W-S	Colorado 77A - 2W	56
3419-77AS-B2W-S	Colorado 77AS - 2W	56
3419-87A-B4W-S	Colorado 87A - 4W	56
3419-87AS-B4W-S	Colorado 87AS - 4W	56
3420-40G-B1.5W-S	Florida 2L- 1,5W	74
3420-40U-B1.5W-S	Florida 1L - 1,5W	74
3421-40G-B1.5W-S	Portland 2L - 1,5W	76
3421-40U-B1.5W-S	Portland 1L - 1,5W	76
3422-60A-B1.5W-S	Alabama 60A - 1,5W	60
3422-60C-B1.5W-S	Alabama 60C - 1,5W	60
3422-75A-B2W-S	Alabama 75A - 2W	60
3422-75C-B2W-S	Alabama 75C - 2W	60
3422-85A-B4W-S	Alabama 85A - 4W	60
3422-85C-B4W-S	Alabama 85C - 4W	60
3422-95A-B6W-S	Alabama 95A - 6W	60
3422-95C-B6W-S	Alabama 95C - 6W	60
3432-40-B1.5W-S	Savannah 40 - 1,5W	70
3450-20-1LED-S	Detroit 20 - 0,5W	82
3451-20-1LED-S	Boston 20 - 0,5W	82
3452-35-1LED-S	Columbia 35 - 0,5W	78
3453-35-1LED-S	Dana 35 - 0,5W	80
3454-35-1LED-S	Nevada 35 - 0,5W	78
3455-35-1LED-S	Baltimora 35 - 0,5W	80
3477-40G-1LED-S	Dallas 2L 40 - 0,5W	64
3477-40U-1LED-S	Dallas 1L 40 - 0,5W	64
3478-40-1LED-S	Bedford 40 - 0,5W	68
3479-105A-B8W-S	Ocean 105A - 8W	22
3479-105C-B8W-S	Ocean 105C - 8W	22
3479-130A-B10W-S	Ocean 130A - 10W	22
3479-130C-B10W-S	Ocean 130C - 10W	22
3479-155A-B12W-S	Ocean 155A - 12W	22
3479-155C-B12W-S	Ocean 155C - 12W	22
3479-210A-B18W-S	Ocean 210A - 18W	22
3479-210C-B18W-S	Ocean 210C - 18W	22
3519-60A-B1.5W-S	Alabama AG 60A - 1,5W	160
3519-60C-B1.5W-S	Alabama AG 60C - 1,5W	160
3519-75A-B2W-S	Alabama AG 75A - 2W	160
3519-75C-B2W-S	Alabama AG 75C - 2W	160
3519-85A-B4W-S	Alabama AG 85A - 4W	160
3519-85C-B4W-S	Alabama AG 85C - 4W	160
3519-95A-B6W-S	Alabama AG 95A - 6W	160
3519-95C-B6W-S	Alabama AG 95C - 6W	160
3520-60A-B1.5W-S	Orlando AG 60A - 1,5W	148
3520-60C-B1.5W-S	Orlando AG 60C - 1,5W	148
3520-75A-B2W-S	Orlando AG 75A - 2W	148
3520-75C-B2W-S	Orlando AG 75C - 2W	148
3520-85A-B4W-S	Orlando AG 85A - 4W	148
3520-85C-B4W-S	Orlando AG 85C - 4W	148
3520-95A-B6W-S	Orlando AG 95A - 6W	148
3520-95C-B6W-S	Orlando AG 95C - 6W	148
3521-60A-B1.5W-S	Malibù AG 60A - 1,5W	144
3521-75A-B2W-S	Malibù AG 75A - 2W	144
3521-85A-B4W-S	Malibù AG 85A - 4W	144
3521-95A-B6W-S	Malibù AG 95A - 6W	144
3522-55A-B1.5W-S	Charlotte AG 55A - 1,5W	156
3522-55C-B1.5W-S	Charlotte AG 55C - 1,5W	156
3522-70A-B2W-S	Charlotte AG 70A - 2W	156
3522-70C-B2W-S	Charlotte AG 70C - 2W	156
3522-80A-B4W-S	Charlotte AG 80A - 4W	156
3522-80C-B4W-S	Charlotte AG 80C - 4W	156
3522-90A-B6W-S	Charlotte AG 90A - 6W	156
3522-90C-B6W-S	Charlotte AG 90C - 6W	156
3523-55A-B1.5W-S	Seattle AG 55A - 1,5W	152
3523-70A-B2W-S	Seattle AG 70A - 2W	152
3523-80A-B4W-S	Seattle AG 80A - 4W	152
3523-90A-B6W-S	Seattle AG 90A - 6W	152
3524-85A-B2W-S	Phoenix AG 85A - 2W	150
3524-85C-B2W-S	Phoenix AG 85C - 2W	150
3524-95A-B4W-S	Phoenix AG 95A - 4W	150
3524-95C-B4W-S	Phoenix AG 95C - 4W	150
3525-85A-B2W-S	Newport AG 85A - 2W	146
3525-95A-B4W-S	Newport AG 95A - 4W	146
3526-80A-B2W-S	Daytona AG 80A - 2W	158
3526-80C-B2W-S	Daytona AG 80C - 2W	158
3526-90A-B4W-S	Daytona AG 90A - 4W	158
3526-90C-B4W-S	Daytona AG 90C - 4W	158
3527-80A-B2W-S	Atlanta AG 80A - 2W	154
3527-90A-B4W-S	Atlanta AG 90A - 4W	154
3528-40-Z1.5W-S	Tampa AG 40 - 1,5W	162
3529-40-Z1.5W-S	Sarasota AG 40 - 1,5W	162
3536-80G-B1.5W-S	Dallas 2L 80 - 1,5W	66
3536-80U-B1.5W-S	Dallas 1L 80 - 1,5W	66
3537-80-B1.5W	Bedford 80 - 1,5W	68
3546-60A-B1.5W-S	Malibù R 60A - 1,5W	28
3546-75A-B2W-S	Malibù R 75A - 2W	28
3546-85A-B4W-S	Malibù R 85A - 4W	28
3546-95A-B6W-S	Malibù R 95A - 6W	28

CODICE	PRODUCT	PAGE
3547-85A-B2W-S	Newport R 85A - 2W	32
3547-95A-B4W-S	Newport R 95A - 4W	32
3548-55A-B1.5W-S	Venice R 55A - 1,5W	52
3548-70A-B2W-S	Venice R 70A - 2W	52
3548-80A-B4W-S	Venice R 80A - 4W	52
3548-90A-B6W-S	Venice R 90A - 6W	52
3549-55A-B1.5W-S	Seattle R 55A - 1,5W	40
3549-70A-B2W-S	Seattle R 70A - 2W	40
3549-80A-B4W-S	Seattle R 80A - 4W	40
3549-90A-B6W-S	Seattle R 90A - 6W	40
3550-80A-B2W-S	Atlanta R 80A - 2W	44
3550-90A-B4W-S	Atlanta R 90A - 4W	44
3551-50-P4.5W	Memphis 1 50 - 4,5W	20
3551-65-P6W	Memphis 1 65 - 6W	20
3552-50-P4.5W-A	Vegas 1 50 - 4,5W	16
3552-65-P6W-A	Vegas 1 65 - 6W	16
3553-65-P6W-A	Vegas 2 65 - 6W	18
5070-P01	Blade Four A	134
5070-P02	Blade Three A	132
5070-P02-23	Blade Three Black A	166
5070-P03	Blade Four B	134
5070-P04	Blade Three B	132
5070-P04-23	Blade Three Black B	166
5070-P05	Blade Three C	132
5070-P05-23	Blade Three Black C	166
5070-P06	Mini Blade One - A	126
5070-P06-23	Mini Blade Black One - A	168
5070-P07	Mini Blade Two - B	126
5070-P08	Mini Blade Three - C	126
5070-P17	Blade Two A	130
5070-P18	Blade One A	128
5070-P23	Blade Five	136
5070-P45	Blade Two B	130
5070-P46	Blade One B	128
5070-P47	Blade Two C	130
5070-P48	Blade One C	128
5337-240MV-20WM	Flex 240-Top - 20W/m	140
5337-240NV-10WM	Miniflex 240-Top - 10W/m	138

CODICE	PRODUCT	PAGE
5337-240NVP-10WM	Miniflex 240IP-Top - 10W/m	138
5338-120MC-10WM	Flex 120-Top - 10W/m	140
5338-120MCP-10WM	Flex 120IP-Top - 10W/m	140
5338-60MC-5WM	Flex 60-Top - 5W/m	140
5338-60MCP-5WM	Flex 60IP-Top - 5W/m	140
5400-KIT1	Kit X IK 1617	122
5400-KIT10	Kit X Black 1220	122
5400-KIT11	Kit X Black 1616	122
5400-KIT2	Kit X Neonflex1019	122
5400-KIT3	Kit X IK 1010	122
5400-KIT4	Kit X Neonflex 0606	122
5400-KIT5	Kit X IK 0606	122
5400-KIT6	Kit X Duneflex	122
5400-KIT7	Kit X Round S-M	122
5400-KIT8	Kit X Round B	122
5400-KIT9	Kit X Black 1010	122
5400-PRO1	Plastic profile X IK 1617-1MT	120
5400-PRO10	Aluminium profile X Duneflex-1MT	120
5400-PRO10F	Flexible aluminium profile X Duneflex-1MT	120
5400-PRO10R	Recessed aluminium profile X Duneflex-1MT	120
5400-PRO1F	Flexible plastic profile X IK 1617-1MT	120
5400-PRO2	Aluminium profile X IK 1617-1MT	120
5400-PRO2F	Flexible aluminium profile X IK 1617-1MT	120
5400-PRO4	Plastic profile X Neonflex 1010-1MT	120
5400-PRO5	Plastic profile X IK 1010-1MT	120
5400-PRO5F	Flexible plastic profile X IK 1010-1MT	120
5400-PRO6	Aluminium profile X IK 1010-1MT	120
5400-PRO6F	Flexible aluminium profile X IK 1010-1MT	120
5400-PRO6MF	Flexible steel profile X IK 1010-1MT	120
5400-PRO8	Aluminium profile X Neonflex 0606-1MT	120
5400-PRO9	Aluminium profile X IK 0606-1MT	120
5400-PRO9F	Flexible aluminium profile X IK 0606-1MT	120
5404-1MT-10WM	Neonflex 1010 3View 1MT - 10W/m	116
5404-2MT-10WM	Neonflex 1010 3View 2MT - 10W/m	116
5404-3MT-10WM	Neonflex 1010 3View 3MT - 10W/m	116
5404-4MT-10WM	Neonflex 1010 3View 4MT - 10W/m	116
5404-5MT-10WM	Neonflex 1010 3View 5MT - 10W/m	116
5415-1MT-10WM	Neonflex 1010 3View fc 1MT - 10W/m	116

CODICE	PRODUCT	PAGE
5415-2MT-10WM	Neonflex 1010 3View fc 2MT - 10W/m	116
5415-3MT-10WM	Neonflex 1010 3View fc 3MT - 10W/m	116
5415-4MT-10WM	Neonflex 1010 3View fc 4MT - 10W/m	116
5415-5MT-10WM	Neonflex 1010 3View fc 5MT - 10W/m	116
5416-1MT-10WM	Black 1616 1MT - 10W/m	164
5416-2MT-10WM	Black 1616 2MT - 10W/m	164
5416-3MT-10WM	Black 1616 3MT - 10W/m	164
5416-4MT-10WM	Black 1616 4MT - 10W/m	164
5416-5MT-10WM	Black 1616 5MT - 10W/m	164
5417-4MT-10WM	Black 1220 1MT - 10W/m	164
5417-4MT-10WM	Black 1220 2MT - 10W/m	164
5417-4MT-10WM	Black 1220 3MT - 10W/m	164
5417-4MT-10WM	Black 1220 4MT - 10W/m	164
5417-4MT-10WM	Black 1220 5MT - 10W/m	164
5418-1MT-10WM	Black 1010 1MT - 10W/m	164
5418-2MT-10WM	Black 1010 2MT - 10W/m	164
5418-3MT-10WM	Black 1010 3MT - 10W/m	164
5418-4MT-10WM	Black 1010 4MT - 10W/m	164
5418-5MT-10WM	Black 1010 5MT - 10W/m	164
5421-1MT-8WM	Round Smooth S 1MT- 8W/m	112
5421-2MT-8WM	Round Smooth S 2MT- 8W/m	112
5421-3MT-8WM	Round Smooth S 3MT- 8W/m	112
5421-4MT-8WM	Round Smooth S 4MT- 8W/m	112
5421-5MT-8WM	Round Smooth S 5MT- 8W/m	112
5422-1MT-8WM	Round Knit S 1MT- 8W/m	114
5422-2MT-8WM	Round Knit S 2MT- 8W/m	114
5422-3MT-8WM	Round Knit S 3MT- 8W/m	114
5422-4MT-8WM	Round Knit S 4MT- 8W/m	114
5422-5MT-8WM	Round Knit S 5MT- 8W/m	114
5423-1MT-10WM	Round Smooth M 1MT- 10W/m	112
5423-2MT-10WM	Round Smooth M 2MT- 10W/m	112
5423-3MT-10WM	Round Smooth M 3MT- 10W/m	112
5423-4MT-10WM	Round Smooth M 4MT- 10W/m	112
5423-5MT-10WM	Round Smooth M 5MT- 10W/m	112
5424-1MT-10WM	Round Knit M 1MT-10W/m	114
5424-2MT-10WM	Round Knit M 2MT-10W/m	114
5424-3MT-10WM	Round Knit M 3MT-10W/m	114
5424-4MT-10WM	Round Knit M 4MT-10W/m	114

CODICE	PRODUCT	PAGE
5424-5MT-10WM	Round Knit M 5MT-10W/m	114
5425-1MT-10WM	Round Smooth B 1MT-10W/m	112
5425-2MT-10WM	Round Smooth B 2MT-10W/m	112
5425-3MT-10WM	Round Smooth B 3MT-10W/m	112
5425-4MT-10WM	Round Smooth B 4MT-10W/m	112
5425-5MT-10WM	Round Smooth B 5MT-10W/m	112
5426-1MT-10WM	Round Knit B 1MT-10W/m	114
5426-2MT-10WM	Round Knit B 2MT-10W/m	114
5426-3MT-10WM	Round Knit B 3MT-10W/m	114
5426-4MT-10WM	Round Knit B 4MT-10W/m	114
5426-5MT-10WM	Round Knit B 5MT-10W/m	114
5430-1MT-6WM	Neonflex 0606 Top 1MT - 6W/m	118
5430-2MT-6WM	Neonflex 0606 Top 2MT - 6W/m	118
5430-3MT-6WM	Neonflex 0606 Top 3MT - 6W/m	118
5430-4MT-6WM	Neonflex 0606 Top 4MT - 6W/m	118
5430-5MT-6WM	Neonflex 0606 Top 5MT - 6W/m	118
5431-1MT-6WM	Neonflex 0606 side 1MT - 6W/m	118
5431-2MT-6WM	Neonflex 0606 side 2MT - 6W/m	118
5431-3MT-6WM	Neonflex 0606 side 3MT - 6W/m	118
5431-4MT-6WM	Neonflex 0606 side 4MT - 6W/m	118
5431-5MT-6WM	Neonflex 0606 side 5MT - 6W/m	118
5432-1MT-6WM	IK 0606 Top 1MT - 6W/m	102
5432-2MT-6WM	IK 0606 Top 2MT - 6W/m	102
5432-3MT-6WM	IK 0606 Top 3MT - 6W/m	102
5432-4MT-6WM	IK 0606 Top 4MT - 6W/m	102
5432-5MT-6WM	IK 0606 Top 5MT - 6W/m	102
5433-1MT-6WM	IK 0606 Side 1MT - 6W/m	102
5433-2MT-6WM	IK 0606 Side 2MT - 6W/m	102
5433-3MT-6WM	IK 0606 Side 3MT - 6W/m	102
5433-4MT-6WM	IK 0606 Side 4MT - 6W/m	102
5433-5MT-6WM	IK 0606 Side 5MT - 6W/m	102
5434-1MT-10WM	IK 1010 3View 1MT- 10W/m	104
5434-2MT-10WM	IK 1010 3View 2MT- 10W/m	104
5434-3MT-10WM	IK 1010 3View 3MT- 10W/m	104
5434-4MT-10WM	IK 1010 3View 4MT- 10W/m	104
5434-5MT-10WM	IK 1010 3View 5MT- 10W/m	104
5435-1MT-10WM	IK 1010 Top 1MT - 10W/m	104
5435-2MT-10WM	IK 1010 Top 2MT - 10W/m	104

Table of articles

CODICE	PRODUCT	PAGE
5435-3MT-10WM	IK 1010 Top 3MT - 10W/m	104
5435-4MT-10WM	IK 1010 Top 4MT - 10W/m	104
5435-5MT-10WM	IK 1010 Top 5MT - 10W/m	104
5436-1MT-10WM	IK 1010 Side 1MT- 10W/m	104
5436-2MT-10WM	IK 1010 Side 2MT- 10W/m	104
5436-3MT-10WM	IK 1010 Side 3MT- 10W/m	104
5436-4MT-10WM	IK 1010 Side 4MT- 10W/m	104
5436-5MT-10WM	IK 1010 Side 5MT- 10W/m	104
5437-1MT-10WM	IK 1617 Double Bending 1MT- 10W/m	106
5437-2MT-10WM	IK 1617 Double Bending 2MT- 10W/m	106
5437-3MT-10WM	IK 1617 Double Bending 3MT- 10W/m	106
5437-4MT-10WM	IK 1617 Double Bending 4MT- 10W/m	106
5437-5MT-10WM	IK 1617 Double Bending 5MT- 10W/m	106
5438-1MT-10WM	IK 1617 Top 1MT- 10W/m	106
5438-2MT-10WM	IK 1617 Top 2MT- 10W/m	106
5438-3MT-10WM	IK 1617 Top 3MT- 10W/m	106
5438-4MT-10WM	IK 1617 Top 4MT- 10W/m	106
5438-5MT-10WM	IK 1617 Top 5MT- 10W/m	106
5439-1MT-10WM	IK 1617 Side 1MT- 10W/m	106
5439-2MT-10WM	IK 1617 Side 2MT- 10W/m	106
5439-3MT-10WM	IK 1617 Side 3MT- 10W/m	106
5439-4MT-10WM	IK 1617 Side 4MT- 10W/m	106
5439-5MT-10WM	IK 1617 Side 5MT- 10W/m	106
5440-1MT-10WM	Duneflex 1MT - 10W/m	108
5440-2MT-10WM	Duneflex 2MT - 10W/m	108
5440-3MT-10WM	Duneflex 3MT - 10W/m	108
5440-4MT-10WM	Duneflex 4MT - 10W/m	108
5440-5MT-10WM	Duneflex 5MT - 10W/m	108
5470-5077L	Electrified angular connector X Track 4	186
5470-5077LT	Electrified linear connector X Track 4	186
5470-5080LDT	Power supply connector	186
5470-5080LT	Electrified Linear Connector X Track 5	186
5470-5080LTL	Electrified linear connector X Track 5	186
5470-T4B2MT-A	Tym Track 4	172
5470-T5B2MT-A	Tym Track 5	174
5471-204-B6W-A	Tym Glow	176
5471-204-Z6W-A	Tym Ray	178

CODICE	PRODUCT	PAGE
5472-110-Z5W	Tym Dart	180
5473-204-B6W	Tym Glow 2	182
5473-204-Z6W	Tym Ray 2	184
5480-CLINKT8	Angular electrified connector X Track 8	210
5480-CLINKT9	Angular electrified connector X Track 9	210
5480-CONPCST9	Connecting bracket X Track 9	210
5480-CT6L	Angular connector X Track 6	210
5480-CT8I	Linear connector X Track 8	210
5480-CT8L	Angular connector X Track 8	210
5480-CT9L	Angular connector X Track 9	210
5480-ILINKT8	Linear electrified connector X Track 8	210
5480-ILINKT9	Linear electrified connector X Track 9	210
5480-INMODT8	Power supply connector X Track 8	210
5480-INMODT9	Power supply connector X Track 9	210
5480-MCT6	Clip X Track 6	210
5480-MCT9	Clip X Track 9	210
5480-PECT6	Endcap X Track 6	210
5480-PECT8	Endcap X Track 8	210
5480-PECT9	Endcap X Track 9	210
5480-T6B2MT-A	Tym Track 6	188
5480-T8B2MT-A	Tym Track 8	190
5480-T9B2MT-A	Tym Track 9	202
5482-302-B10W	Tym Mini Glow	204
5482-302-Z5W-A-23	Tym Mini Ray	206
5483-60-Z5W	Tym Mini Dart	208
5484-115-B6W	Tym Glow R	194
5484-115-Z6W	Tym Ray R	192
5485-115-B6W	Tym Glow Adj	198
5485-115-Z6W	Tym Ray Adj	196
5486-115-Z7W	Tym Dart R	200
9000-RING130	Ring 130 X Ocean 105	24
9000-RING155	Ring 155 X Ocean 130	24
9000-RING180	Ring 180 X Ocean 155	24
9000-RING235	Ring 235 X Ocean 210	24

Desideriamo ringraziare tutti coloro che nella lunga storia della nostra azienda hanno contribuito con capacità, serietà e impegno a fare del marchio BCM il riferimento di eccellenza nella produzione di apparecchi per illuminazione. Un successo la cui parte integrante sono i nostri clienti, tra i più prestigiosi cantieri e designers nel settore della nautica, importanti architetti e operatori nel settore residenziale e "contract", che continuano a privilegiare la scelta dei nostri prodotti ritenendoli esempio di stile, affidabilità e sicurezza.

We wish to thank all those who in the long history of our company have contributed with ability, professionalism and commitment towards making the BCM brand a landmark of excellence in the production of lighting fixtures. Our customers, who form an integral part of our success and include the most prestigious shipyards and designers in the nautical field, as well as important architects and operators in the residential and "contract" sectors, continue to prefer our range of products for their cutting-edge style, reliability and safety.

BENEDETTI LIGHTING

L'azienda si riserva il diritto, in qualsiasi momento e senza preavviso, di eliminare gli articoli che riterrà opportuno e/o di apportare tutte le modifiche atte a migliorare il prodotto. Non può inoltre assumersi responsabilità per eventuali inesattezze del presente catalogo dovute ad errori di stampa, trascrizione e traduzione.

The company reserves, at any moment and without prior notice, the right to discontinue producing or to modify whichever item with the purpose of improving quality. The company can not take the responsibility for any errors present in this catalogue due to misprint, mistakes in copying and translation.

BCM illuminazione srl

Via G. Pastore, 2
55041 Capezzano Pianore
Lucca • Italia
Tel. +39 0584 969632
Fax +39 0584 969578

www.bcmilluminazione.com
info@bcmilluminazione.com

Art Direction and Supervision
GERECON ITALIA
Claudia & Edoardo Brogini

©BCM illuminazione 2026

