



## Acoustic and optical signalling - TECHNICAL CHARACTERISTICS

### Step marker lamp with LED

#### Scope


- Localized lighting of floors, steps, stairs.
- bed-head courtesy light

#### Technical specifications

- supply voltage:
  - **14389**: 230 V~;
  - **14389.120**: 120 V~
- absorption:
  - **14389**: 1 W;
  - **14389.120**: 0,5 W;
- LED appliances of class 1
- high-efficiency LED with luminous flux: 3 lumen
- luminous beam adjustable on three levels
- high-resistance to impact
- Class II  appliances
- installable also on normally inflammable surfaces 

#### Conformity to Standards

LV Directive  
 EN60598-1, EN 60598-2-2, EN 60825-1 Standards  
 EMC Directive  
 EN 61547, EN 61000-3-2, EN 61000-3-3, EN 55015 Standards

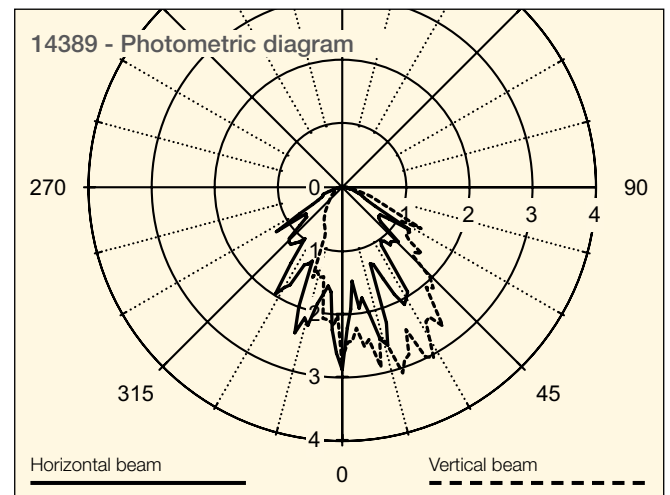



### Step marker lamp with LED 12 V~

#### Scope


- Localized lighting of floors, steps, stairs.
- bed-head courtesy light

#### Technical specifications

- supply voltage: 12 V~ or 12 V d.c. (SELV)
- absorption: 0,5 W
- LED appliances of class 1
- high-efficiency LED with luminous flux: 3 lumen
- luminous beam adjustable on three levels
- high-resistance to impact
- Class II  appliances
- installable also on normally inflammable surfaces 

#### Conformity to Standards


EN 60598-1, EN 60598-2-2, EN 60825-1 Standards  
 EMC Directive  
 EN 61547, EN 55015 Standards

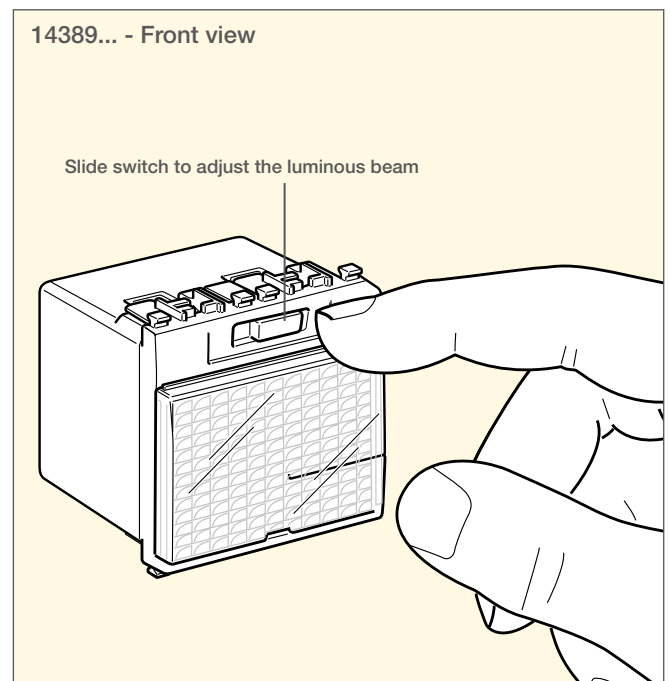

## Acoustic and optical signalling

### Step marker lamp

<b>14389</b>	<b>.SL</b>	Step marker lamp with high-efficiency LED, supply voltage 230 V~ 50-60 Hz, adjustable beam on three levels - 2 modules
<b>14389.120</b>	<b>.SL</b>	Step marker lamp with high-efficiency LED, supply voltage 120 V~ 50-60 Hz, adjustable beam on three levels - 2 modules

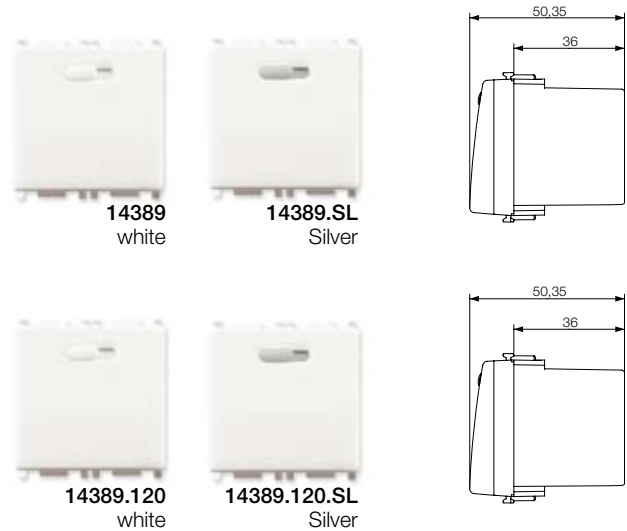

### Step marker lamp, 12 V~

<b>14389.012</b>	<b>.SL</b>	Step marker lamp with high-efficiency LED, supply voltage 12 V~ 50-60 Hz or 12 V d.c. (SELV), adjustable beam on three levels - 2 modules
------------------	------------	---

