JOKER



bem
BENEDETTI LIGHTING



JOKER

FLEXIBLE
EXTENDABLE
ADJUSTABLE

FINITURE
FINISHES

✱ finiture speciali • special finishes



Colori laccati
Lacquered colours

20 bianco *white*

23 nero *black*

Colori freddi
Cold colours

4 acciaio inox *stainless steel*

34 acciaio inox satinato *satin stainless steel*

3 cromo lucido *polished chrome*

11 cromo satinato *satin chrome*

10 nickel lucido *polished nickel*

27 titanio lucido *polished titan*

28 titanio opaco matt titan

39 nickel satinato v. opaco satin nickel matt p.

✱ **53** nickel nero lucido 2025 polished black nickel 2025

✱ **63** nickel nero opaco 2025 matt black nickel 2025

✱ **51** cromo opaco matt chrome

✱ **61** nickel opaco matt nickel

Colori caldi
Warm colours

7 ottone brunito burnished brass

37 ottone brunito v. opaco burnished brass matt p.

✱ **52** ottone lucido 2025 polished brass 2025

✱ **62** ottone opaco 2025 matt brass 2025

I colori sono indicativi; lievi variazioni rientrano nella tolleranza. Le finiture spazzolate possono variare in base all'articolo.
Colours are indicative; slight variations are within tolerance. Brushed finishes may vary depending on the item.

Colori sfere
Sphere colour

Frosty white

Clear

Golden sage

Mandarin orange

Deep azure steel

Glossy smoke

Colore personalizzabile su richiesta.
Colour customisable on request.

INDICE
INDEX

JOKER

Joker FC 4
Joker IAC 6
Joker AC 8
Joker BAC 10
Joker PFC 12
Joker PAC 14
Joker PEFC 16
Joker PEAC 18
Joker RAW 20
Joker QAW 22
Joker K 24
Joker FAD 26
Joker SPFC 28
Joker SPEC 30
Joker SFC 32

JOKER FC



LED COLOUR

3000K
CRI >90
LMN 257lm
1mt 1270lx
2mt 317lx
3mt 141lx





FINISHES

FE	23	20	3	7	10	11	37	39	51	52	53	61	62	63
I	23	20												

TECHNICAL



CODE	**3554**-30FC-F3W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP65
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE



JOKER IAC



LED COLOUR



3000K
CRI >90
LMN 257lm
1mt 1270lx
2mt 317lx
3mt 141lx



FINISHES

R=FE	23	20	3	7	10	11	37	39	51	52	53	61	62	63
I	23	20												

TECHNICAL

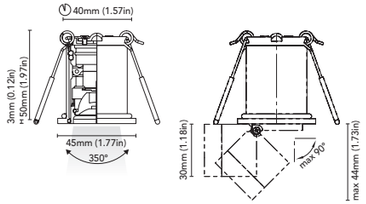

CODE	**3556**-30IAC-F3W
FIXTURE	RETRACTABLE ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP65
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	WIRE SPRINGS

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE

JOKER AC



LED COLOUR



3000K
CRI >90
LMN 257lm
1mt 1270lx
2mt 317lx
3mt 141lx



FINISHES

FE	23	20	3	7	10	11	37	39	51	52	53	61	62	63
I	23	20												

TECHNICAL



CODE	**3555**-30AC-F3W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP65
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE

JOKER BAC



TECHNICAL



CODE	**3557**-30BAC-F3W
FIXTURE	RETRACTABLE ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP65
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE

LED COLOUR



3000K

CRI	>90
LMN	257lm
1mt	1270lx
2mt	317lx
3mt	141lx



FINISHES

R=FE	23	20	3	7	10	11	37	39	51	52	53	61	62	63
I	23	20												



JOKER PFC



TECHNICAL



CODE	**3558**-30PFC-F3W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP40
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

LED COLOUR



3000K
CRI >90
LMN 257lm
1mt 1270lx
2mt 317lx
3mt 141lx



FINISHES

R=C=FE	23	20	3	7	10	11	37	39	51	52	53	61	62	63
I	23	20												

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE

JOKER PAC



TECHNICAL



CODE	**3559**-30PAC-F3W
FIXTURE	ADUSTABLE DOWNLIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP40
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE



LED COLOUR

3000K
CRI >90
LMN 257lm
1mt 1270lx
2mt 317lx
3mt 141lx



FINISHES

R=C=FE	23	20	3	7	10	11	37	39	51	52	53	61	62	63
I	23	20												



JOKER PEFC



TECHNICAL



CODE	**3560**-30PEFC-F3W
FIXTURE	RETRACTABLE FIXED DOWNLIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP40
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

LED COLOUR



3000K
CRI >90
LMN 257lm
1mt 1270lx
2mt 317lx
3mt 141lx



FINISHES

R=C=FE 3 7 10 11 37 39 51 52 53 61 62 63

I 23 20

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE

JOKER PEAC



LED COLOUR



3000K

CRI	>90
LMN	257lm
1mt	1270lx
2mt	317lx
3mt	141lx



FINISHES

R=C=FE	3	7	10	11	37	39	51	52	53	61	62	63
I	23	20										

TECHNICAL

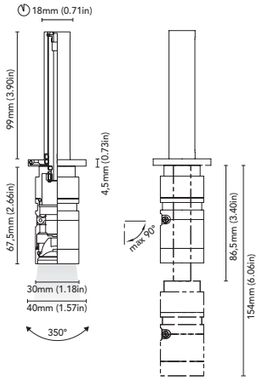

CODE	**3561**-30PEAC-F3W
FIXTURE	RETRACTABLE ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP40
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE

JOKER RAW



TECHNICAL

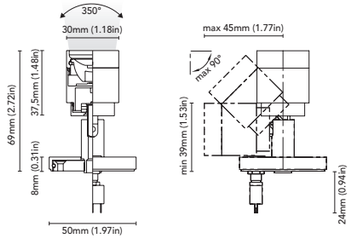

CODE	**2210**-I-F3W
FIXTURE	WALL READING LAMP
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP40
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

LED COLOUR



3000K
CRI >90
LMN 257lm
1mt 1270lx
2mt 317lx
3mt 141lx



FINISHES

	23	3	7	10	11	37	39	51	52	53	61	62	63
R=C=FE	●	◓	●	◓	○	●	●	○	◑	●	●	●	●
I	23												

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE



JOKER QAW



LED COLOUR



3000K
CRI >90
LMN 257lm
1mt 1270lx
2mt 317lx
3mt 141lx



FINISHES

R=C=FE 23 3 7 10 11 37 39 51 52 53 61 62 63

I 23

TECHNICAL

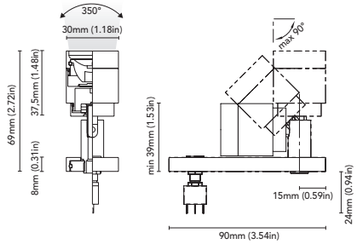

CODE	**2212**-I-F3W
FIXTURE	WALL READING LAMP
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP40
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE

JOKER K



LED COLOUR



3000K
CRI >90
LMN 257lm
1mt 1270lx
2mt 317lx
3mt 141lx



FINISHES

R=C=FE 23 3 7 10 11 37 39 51 52 53 61 62 63

I 23

TECHNICAL



CODE	**2213**-I-F3W
FIXTURE	RETRACTABLE WALL READING LAMP
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP40
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE



JOKER FAD





LED COLOUR

3000K
CRI >90
LMN 257lm
1mt 1270lx
2mt 317lx
3mt 141lx



FINISHES

R=C=FE	23	3	7	10	11	37	39	51	52	53	61	62	63
I	23												

TECHNICAL



CODE	**2211**-I-F3W
FIXTURE	DESK READING LAMP
ADJUSTABILITY	YES
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	LENS
IP RATE	IP40
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

OPTIONAL

LED COLOUR	2700K - 4000K
BEAM	NARROW - WIDE

JOKER SPFC



TECHNICAL



CODE	**3563**-100SPFC-F3W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	FROSTED
IP RATE	IP40
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS



LED COLOUR

3000K
CRI >90
LMN 124lm
1mt 73lx
2mt 18lx
3mt 8lx

FINISHES

R=C=FE	23	20	3	7	10	11	37	39	51	52	53	61	62	63
I	23	20												

OPTIONAL

LED COLOUR	2700K - 4000K
SCREEN	CUSTOM SPHERE COLOUR

JOKER SPEC



LED COLOUR



3000K
CRI >90
LMN 124lm
1mt 73lx
2mt 18lx
3mt 8lx

FINISHES

R=C=FE 3 7 10 11 37 39 51 52 53 61 62 63

I 23 20

TECHNICAL

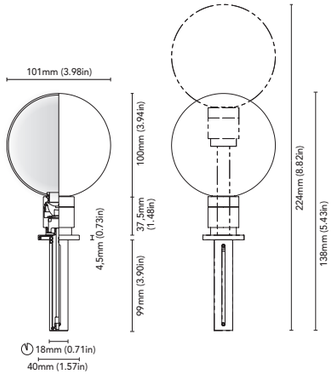

CODE	**3564**-100-SPEC-F3W
FIXTURE	RETRACTABLE FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	FROSTED
IP RATE	IP40
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

OPTIONAL

LED COLOUR	2700K - 4000K
SCREEN	CUSTOM SPHERE COLOUR

JOKER SFC



LED COLOUR



3000K
CRI >90
LMN 124lm
1mt 73lx
2mt 18lx
3mt 8lx

FINISHES

FE	23	20	3	7	10	11	37	39	51	52	53	61	62	63
I	23	20												

TECHNICAL



CODE	**3562**-100SFC-F3W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 3W
SUPPLY	16-32 VDC
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	FROSTED
IP RATE	IP65
MATERIALS	BODY: BRASS HEATSINK: ALUMINIUM
MOUNTING SYSTEM	SCREWS

OPTIONAL

LED COLOUR	2700K - 4000K
SCREEN	CUSTOM SPHERE COLOUR

Claudio Grogini

BENEDETTI LIGHTING

Via G. Pastore, 2 - 55041 Capezzano Pianore - Lucca - Italia
tel. +39 0584 969632 - fax +39 0584 969578
info@bcmilluminazione.com - **www.bcmilluminazione.com**